




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

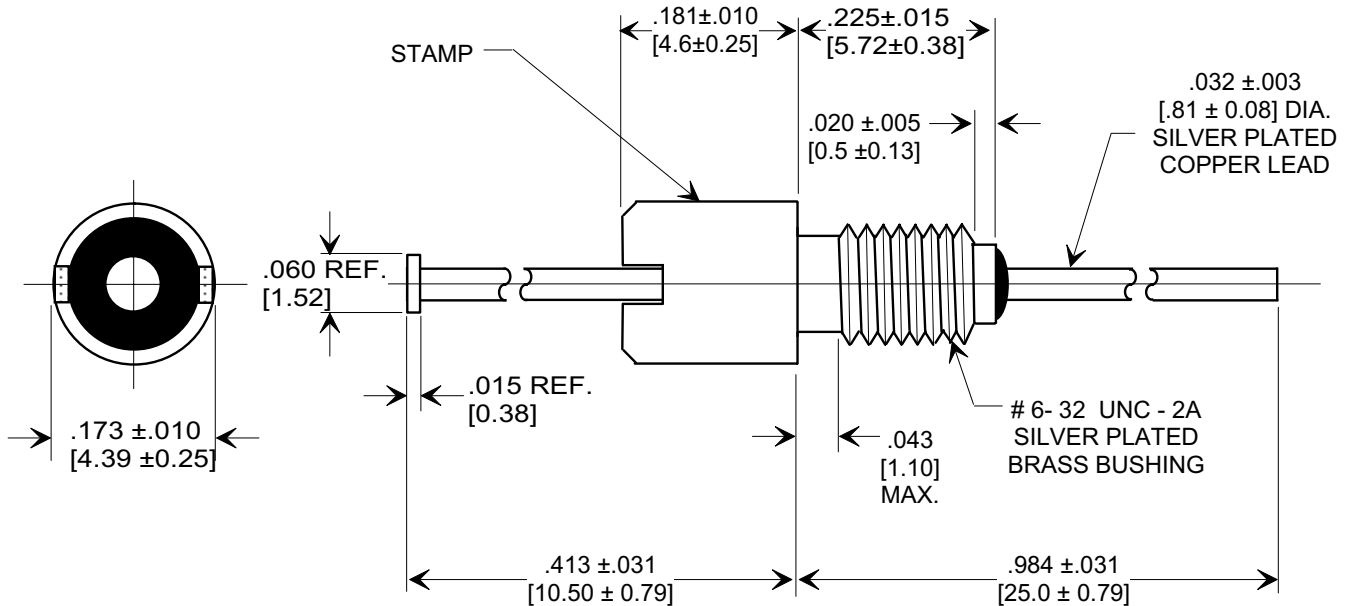

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



NOTES:

1. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
2. MAX. RECOMMENDED MOUNTING TORQUE: 1.0 Lb.-IN.
3. MAX. RECOMMENDED SOLDERING TEMPERATURE: 260°C.
SEE INSTALLATION RECOMMENDATIONS.
4. MARKING: STAMP TMK AND VARIATION ON SIDE OF BUSHING.

CAP.(pf)	TOL.	DC WORKING VOLTAGE		CURRENT (AMPS) DC	I.R. MIN. @ 100 (VDC)	DWV (VDC)	TYPICAL NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220				
		85 °C	125 °C				1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
22,000	-20% +80%	100	100	10	10 G Ω	150	12	30	50	68	70

X-2015 Rev-0	REVISION RECORD	Original Release	WAS SK 8188-692. S.M.04-18-06	0
		C.O.		20060413-01-07

--TOLERANCES-- Unless Otherwise Specified		Title	
DECIMAL ± $\frac{\quad}{\quad}$		BUSHING STYLE EMI FILTER	
ANGLES ± $\frac{\quad}{\quad}$			
TUSONIX TUCSON, ARIZONA		Drawn	L.E. 02-27-06
		Approved	T.C. 02-27-06
A		4402-066	