

Elinx™ EIR408-T

8 Port Gigabit Industrial Ethernet Switch

- ✓ 8 10/100/1000 Base-T Ethernet Ports
- ✓ UL Class 1 Div 2
- ✓ Dual 12 to 48 VDC Power Inputs
- ✓ Wide Operating Temperature (-40 to 75C)
- ✓ DIN or Panel Mount Options



The **EIR408-T** is an 8 Port Unmanaged Industrial Gigabit Ethernet Switch. Packed full of rugged features, this switch is perfect for your high speed industrial network.

High-Speed Transmissions: The EIR408-T includes a switch controller that automatically senses transmission speed (10/100/1000 Mbps). The RJ-45 interface also auto-detects MDI or MDI-X, eliminating the requirement for a crossover cable. Each port is buffered and supports store-and-forward protocol.


Dual Power Input: To reduce the risk of power failure, the EIR408-T provides two 12 to 48 VDC power inputs. If the power fails, the switch will automatically use the secondary power input. Also, if the power goes out the corresponding P1 or P2 LED will go out and the Fault LED will light. The contacts for the alarm output will also open.

Flexible Mounting: The switch features a space saving IP30 metal enclosure that can be DIN or Panel mounted.

Wide Operating Temperature: With an operating temperature of -40 to 75°C (-40 to 167°F), this switch can be used in harsh industrial environments.

Easy Troubleshooting: There are two LED indicators for each port that display the link status and transmission speed. Three LED indicators for power (P1, P2 and Fault) show power status. These indicators allow you to quickly diagnose and correct problems and ensure your network remains reliable.

B&B Electronics' Elinx™ Brand Ethernet Switches are your number one choice for reliable performance in harsh industrial environments.

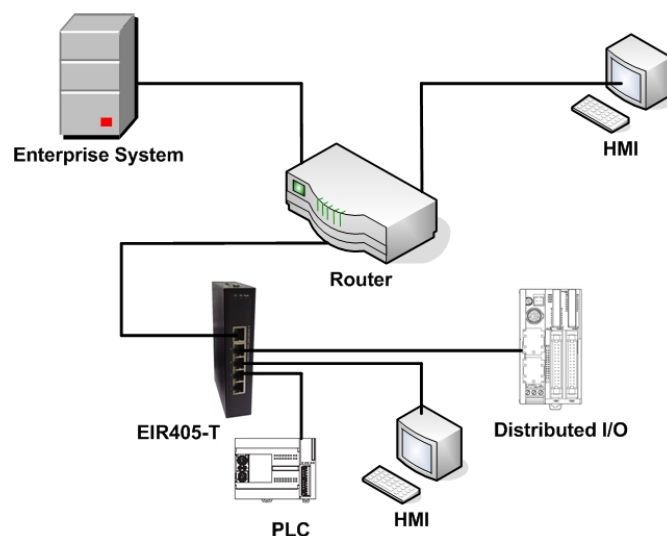

Ordering Information

Model Number	Description
EIR408-T	8 Port Industrial Gigabit Switch
Accessories	
MDR-60-24	24VDC, 2.5A DIN Mount Power Supply



Specifications

IEEE Standards

IEEE 802.3	802.3. 10Base-T Ethernet
IEEE 802.3u	100Base-TX and 100Base-FX Fast Ethernet
IEEE 802.3ab	1000Base-T
IEEE 802.3x	Flow Control and Back Pressure

Network Specifications

Architecture	Back-plane (Switching Fabric): 16Gbps Throughput (Full-dup): 23.8Mpps@64bytes
Transmission Speed	Up to 1000 Mbps
Buffer	136 Kbits
MAC Table	8K
Jumbo Frame	9.6Kbytes
Misc	Broadcast Storm Protection

Interface

RJ-45 Ports	8 x 10/100/1000BaseT, Auto MDI/MDI-X
-------------	--------------------------------------

LED Indicators P1 (Power 1), P2 (Power 2),
Fault (Power Fault),
RJ-45 Ports have 2 LED's to indicate LINK
and activity

Power

Input Voltage	Dual 12 to 48 VDC Inputs Reverse Polarity Protection
Power Connection	Removable Terminal Block
Wire Size	12 to 24 AWG
Power Use	7.788 Watts
Fault Output	1 Relay Output – Normally Closed

Environmental


Op. Temp	- 40 to 75°C (-40 to 167°F)
Storage Temp	- 40 to 85°C (-40 to 185°F)
Op. Humidity	0 to 95%

Mechanical

Enclosure	IP30 Metal Enclosure
Mounting	35mm DIN Rail or Panel Mount Attachments
Dimensions	1.18 x 5.51 x 3.74 in (30 x 140 x 95 mm)

Certifications

Safety	CE EN60950-1
Hazardous Location EMC	UL/cUL Class I, Division 2, Groups A, B, C and D FCC Class A, CE EN61000-4-2 (ESD) CE EN61000-4-3 (RS) CE EN61000-4-4 (EFT) CE EN61000-4-5 (Surge) CE EN61000-4-6 (CS) CE EN61000-4-8 CE EN61000-6-2 CE EN61000-6-4 IEC60068-2-32 IEC60068-2-27 IEC60068-2-6
Free Fall Shock Vibration	

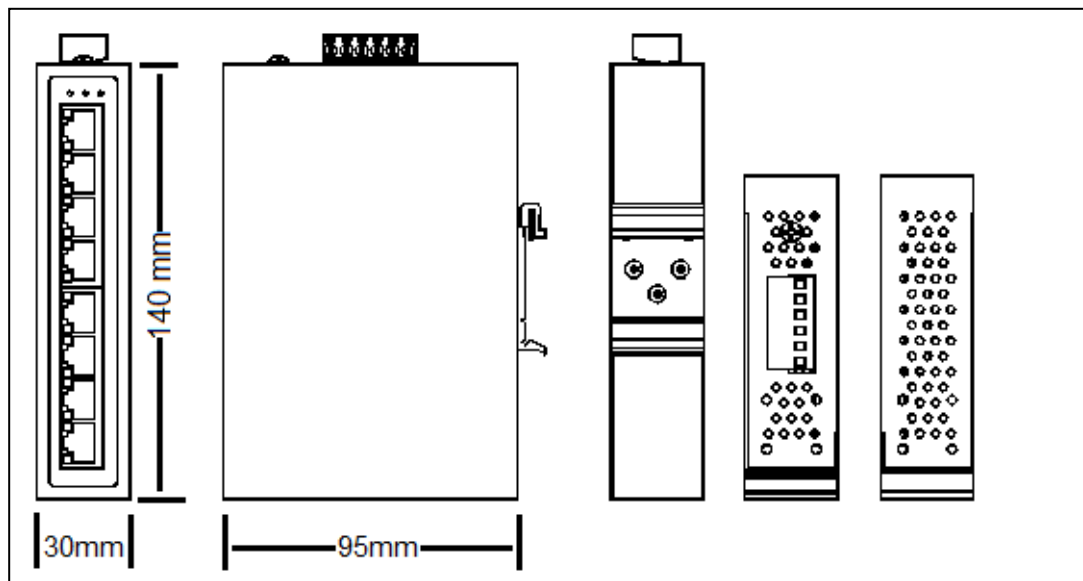

www.bb-elec.com orders@bb-elec.com support@bb-elec.com

International Office: 707 Dayton Road PO Box 1040 Ottawa, IL 61350 USA 815-433-5100 Fax 433-5104
European Office: Westlink Commercial Park Oranmore Co. Galway Ireland +353 91 792444 Fax +353 91 792445