## HCMOS/ TTL COMPATIBLE, J LEADED, PLASTIC MOLDED SMD CRYSTAL CLOCK OSCILLATOR

**ASM SERIES** 


Pb in high temperature solder (exempt per RoHS 2002/95/EC Annex (7)).





14.0 x 8.95 x 4.7 mm

The 14x9.8mm plastic package oscillator is not recommended for new designs. Please consider our reduced size ceramic or plastic molded SMD packages. Recommended series include ASL, ASV, ASVM, ASFL, ASFLM, ASE, ASEM. For 5.0V please use ASL series. Product Life Cycle: Declining, Planned EOL/Obsolescence pending 12/31/2011

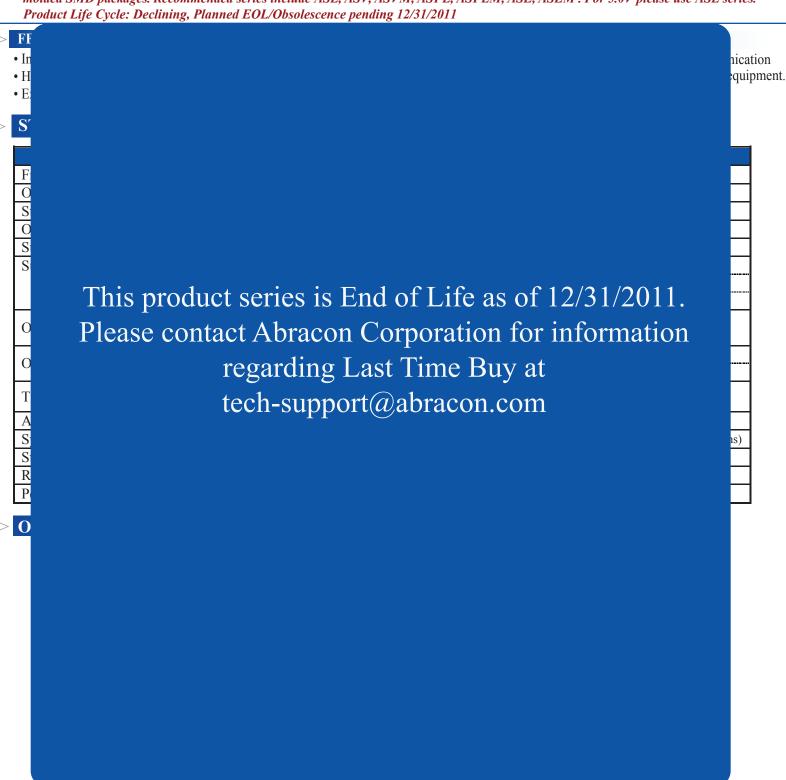





L: -40°C to +85°C


## HCMOS/ TTL COMPATIBLE, J LEADED, PLASTIC MOLDED SMD CRYSTAL CLOCK OSCILLATOR

**ASM SERIES** 

Pb in high temperature solder (exempt per RoHS 2002/95/EC Annex (7)).





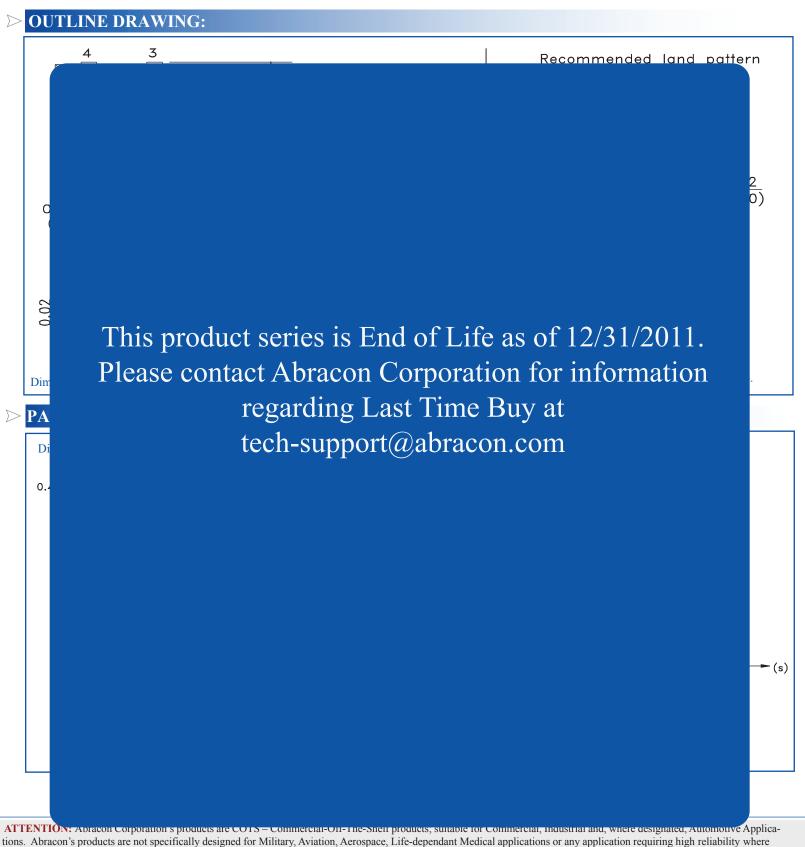

component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and





authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.