



## P-Channel 20-V (D-S) MOSFET

PRODUCT SUMMARY		
$V_{DS}$ (V)	$r_{DS(on)}$ ( $\Omega$ )	$I_D$ (mA)
-20	3.8 @ $V_{GS} = -4.5$ V	-180
	5.0 @ $V_{GS} = -2.5$ V	-100



ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)			
Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	-20	V
Gate-Source Voltage	$V_{GS}$	$\pm 8$	
Continuous Drain Current ( $T_J = 150^\circ\text{C}$ ) <sup>a</sup>	$I_D$	$T_A = 25^\circ\text{C}$	-180
		$T_A = 70^\circ\text{C}$	-140
Pulsed Drain Current	$I_{DM}$	-500	mA
Maximum Power Dissipation <sup>a</sup>	$P_D$	$T_A = 25^\circ\text{C}$	0.20
		$T_A = 70^\circ\text{C}$	0.13
Operating Junction and Storage Temperature Range	$T_J, T_{stg}$	-55 to 150	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS			
Parameter	Symbol	Limit	Unit
Maximum Junction-to-Ambient <sup>a</sup>	$R_{thJA}$	625	$^\circ\text{C}/\text{W}$

Notes

a. Surface Mounted on FR4 Board,  $t \leq 10$  sec.









SPECIFICATIONS (T <sub>J</sub> = 25 °C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
<b>Static</b>						
Drain-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>DS</sub> = 0 V, I <sub>D</sub> = -10 μA	-20	-24		V
Gate-Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = -50 μA	-0.4	-0.9	-1.5	
Gate-Body Leakage	I <sub>GSS</sub>	V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ±8 V		±2	±100	nA
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = -20 V, V <sub>GS</sub> = 0 V		-0.001	-100	
		V <sub>DS</sub> = -20 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 55 °C			-1	μA
On-State Drain Current <sup>a</sup>	I <sub>D(on)</sub>	V <sub>GS</sub> ≤ -4.5 V, V <sub>DS</sub> = -8.0 V	-400			mA
		V <sub>GS</sub> ≤ -2.5 V, V <sub>DS</sub> = -5.0 V	-120			
Drain-Source On-State Resistance <sup>a</sup>	r <sub>DS(on)</sub>	V <sub>GS</sub> = -4.5 V, I <sub>D</sub> = -180 mA		2.6	3.8	Ω
		V <sub>GS</sub> = -2.5 V, I <sub>D</sub> = -75 mA		4.0	5.0	
Forward Transconductance <sup>a</sup>	g <sub>fs</sub>	V <sub>DS</sub> = -2.5 V, I <sub>D</sub> = -50 mA		200		mS
Diode Forward Voltage <sup>a</sup>	V <sub>SD</sub>	I <sub>S</sub> = -50 mA, V <sub>GS</sub> = 0 V		-0.7	-1.2	V
<b>Dynamic</b>						
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> = -5.0 V, V <sub>GS</sub> = -4.5 V, I <sub>D</sub> = -100 mA		350	450	pC
Gate-Source Charge	Q <sub>gs</sub>			25		
Gate-Drain Charge	Q <sub>gd</sub>			125		
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> = -5.0 V, V <sub>GS</sub> = 0 V, f = 1 MHz		20		pF
Output Capacitance	C <sub>oss</sub>			14		
Reverse Transfer Capacitance	C <sub>rss</sub>			5		
<b>Switching<sup>b, c</sup></b>						
Turn-On Delay Time	t <sub>d(on)</sub>	V <sub>DD</sub> = -3.0 V, R <sub>L</sub> = 100 Ω I <sub>D</sub> = -0.25 A, V <sub>GEN</sub> = -4.5 V, R <sub>G</sub> = 10 Ω		7	12	ns
Rise Time	t <sub>r</sub>			25	35	
Turn-Off Delay Time	t <sub>d(off)</sub>			19	30	
Fall Time	t <sub>f</sub>			9	15	

## Notes




- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.  
 b. For design only, not subject to production testing.  
 c. Switching time is essentially independent of operating temperature.

**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

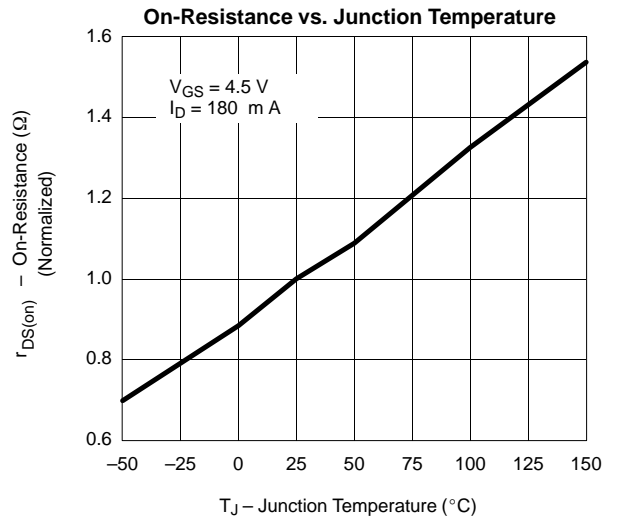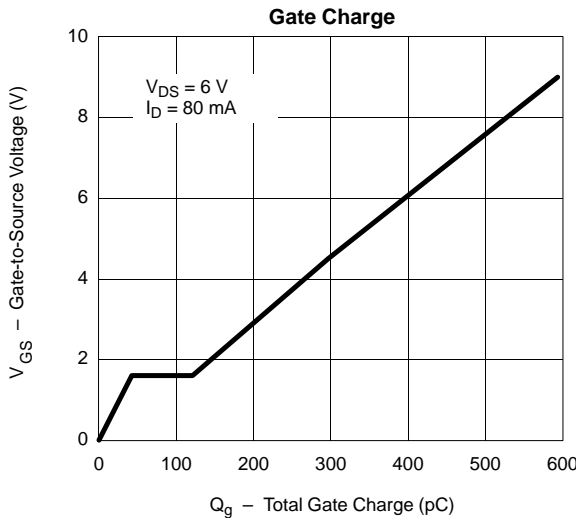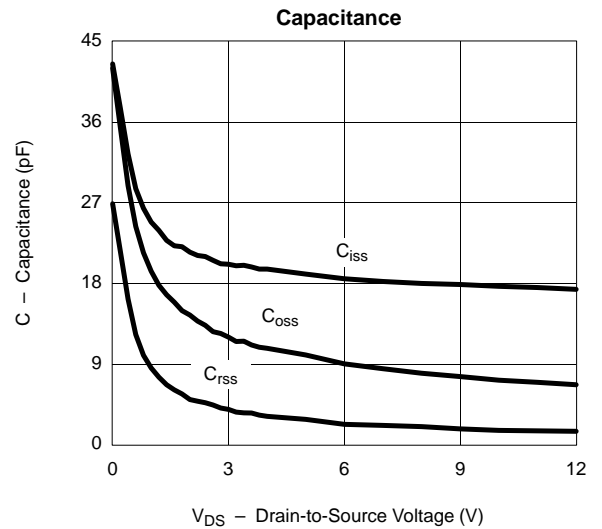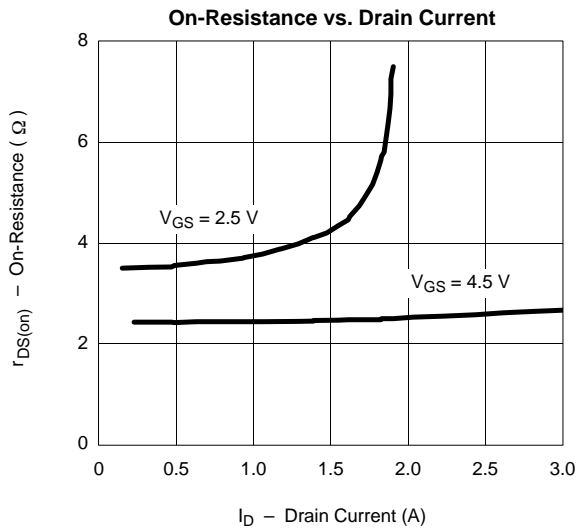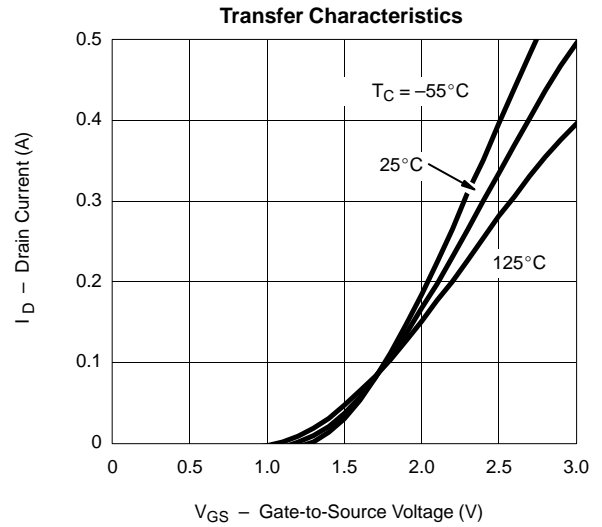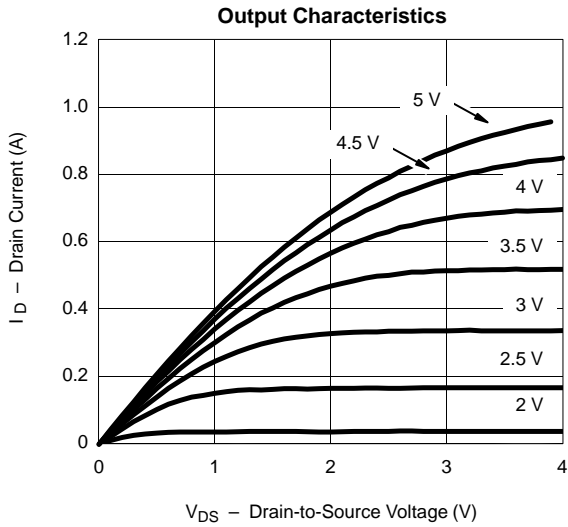



**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

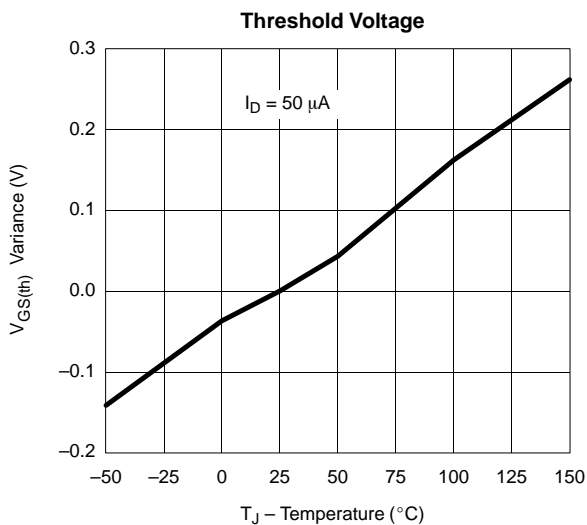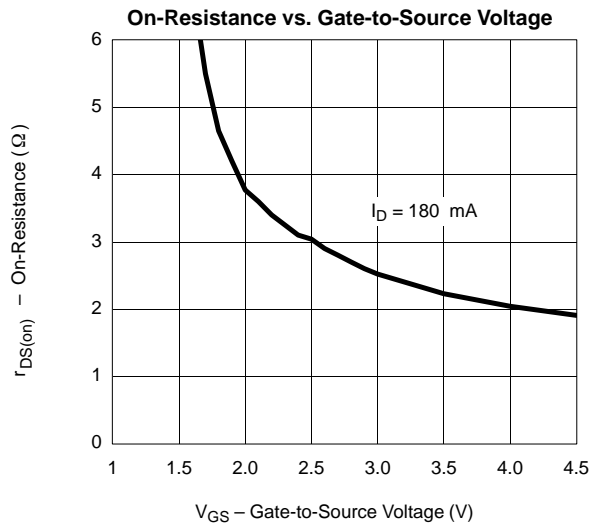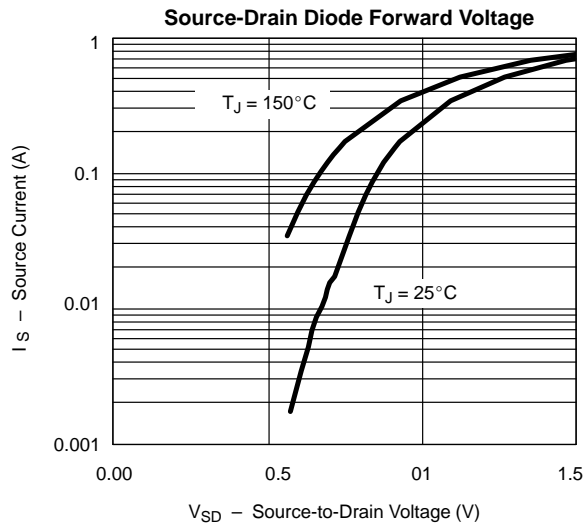



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.