


- Designed for Complementary Use with the TIP33 Series
- 80 W at 25°C Case Temperature
- 10 A Continuous Collector Current
- 15 A Peak Collector Current
- Customer-Specified Selections Available

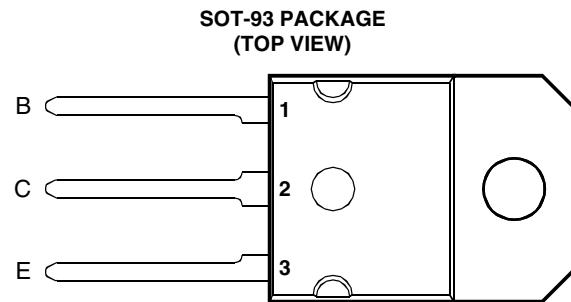

Pin 2 is in electrical contact with the mounting base.

MDTRAAA

absolute maximum ratings at 25°C case temperature (unless otherwise noted)

RATING		SYMBOL	VALUE	UNIT
Collector-base voltage ($I_E = 0$)	TIP34 TIP34A TIP34B TIP34C	V_{CBO}	-80 -100 -120 -140	V
Collector-emitter voltage ($I_B = 0$)	TIP34 TIP34A TIP34B TIP34C	V_{CEO}	-40 -60 -80 -100	V
Emitter-base voltage		V_{EBO}	-5	V
Continuous collector current		I_C	-10	A
Peak collector current (see Note 1)		I_{CM}	-15	A
Continuous base current		I_B	-3	A
Continuous device dissipation at (or below) 25°C case temperature (see Note 2)		P_{tot}	80	W
Continuous device dissipation at (or below) 25°C free air temperature (see Note 3)		P_{tot}	3.5	W
Unclamped inductive load energy (see Note 4)		$\frac{1}{2}L_i C^2$	62.5	mJ
Operating junction temperature range		T_j	-65 to +150	°C
Storage temperature range		T_{stg}	-65 to +150	°C
Lead temperature 3.2 mm from case for 10 seconds		T_L	250	°C

NOTES: 1. This value applies for $t_p \leq 0.3$ ms, duty cycle $\leq 10\%$.

2. Derate linearly to 150°C case temperature at the rate of 0.64 W/°C.

3. Derate linearly to 150°C free air temperature at the rate of 28 mW/°C.

4. This rating is based on the capability of the transistor to operate safely in a circuit of: $L = 20$ mH, $I_{B(on)} = -0.4$ A, $R_{BE} = 100$ Ω, $V_{BE(off)} = 0$, $R_S = 0.1$ Ω, $V_{CC} = -20$ V.

PRODUCT INFORMATION

JULY 1968 - REVISED SEPTEMBER 2002
Specifications are subject to change without notice.

electrical characteristics at 25°C case temperature

PARAMETER	TEST CONDITIONS			MIN	TYP	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage I _C = -30 mA (see Note 5)	I _B = 0	TIP34 TIP34A TIP34B TIP34C	-40 -60 -80 -100			V
I_{CES}	Collector-emitter cut-off current $V_{CE} = -80 \text{ V}$ $V_{CE} = -100 \text{ V}$ $V_{CE} = -120 \text{ V}$ $V_{CE} = -140 \text{ V}$	$V_{BE} = 0$ $V_{BE} = 0$ $V_{BE} = 0$ $V_{BE} = 0$	TIP34 TIP34A TIP34B TIP34C			-0.4 -0.4 -0.4 -0.4	mA
I_{CEO}	Collector cut-off current $V_{CE} = -30 \text{ V}$ $V_{CE} = -60 \text{ V}$	I _B = 0 I _B = 0	TIP34/34A TIP34B/34C			-0.7 -0.7	mA
I_{EBO}	Emitter cut-off current $V_{EB} = -5 \text{ V}$	I _C = 0				-1	mA
h_{FE}	Forward current transfer ratio $V_{CE} = -4 \text{ V}$ $V_{CE} = -4 \text{ V}$	I _C = -1A I _C = -3 A	(see Notes 5 and 6)	40 20		100	
$V_{CE(sat)}$	Collector-emitter saturation voltage I _B = -0.3 A I _B = -2.5 A	I _C = -3 A I _C = -10 A	(see Notes 5 and 6)			-1 -4	V
V_{BE}	Base-emitter voltage $V_{CE} = -4 \text{ V}$ $V_{CE} = -4 \text{ V}$	I _C = -3 A I _C = -10 A	(see Notes 5 and 6)			-1.6 -3	V
h_{fe}	Small signal forward current transfer ratio $V_{CE} = -10 \text{ V}$	I _C = -0.5 A	f = 1 kHz	20			
$ h_{fel} $	Small signal forward current transfer ratio $V_{CE} = -10 \text{ V}$	I _C = -0.5 A	f = 1 MHz	3			

NOTES: 5. These parameters must be measured using pulse techniques, $t_p = 300 \mu\text{s}$, duty cycle $\leq 2\%$.

6. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

thermal characteristics

PARAMETER	MIN	TYP	MAX	UNIT
$R_{\theta JC}$ Junction to case thermal resistance			1.56	°C/W
$R_{\theta JA}$ Junction to free air thermal resistance			35.7	°C/W

resistive-load-switching characteristics at 25°C case temperature

PARAMETER	TEST CONDITIONS †			MIN	TYP	MAX	UNIT
t_{on} Turn-on time	I _C = -6 A	I _{B(on)} = -0.6 A	I _{B(off)} = 0.6 A		0.4		μs
t_{off} Turn-off time	$V_{BE(off)} = 4 \text{ V}$	$R_L = 5 \Omega$	$t_p = 20 \mu\text{s}$, dc $\leq 2\%$		0.7		μs

† Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.

PRODUCT INFORMATION

JULY 1968 - REVISED SEPTEMBER 2002

Specifications are subject to change without notice.

TYPICAL CHARACTERISTICS

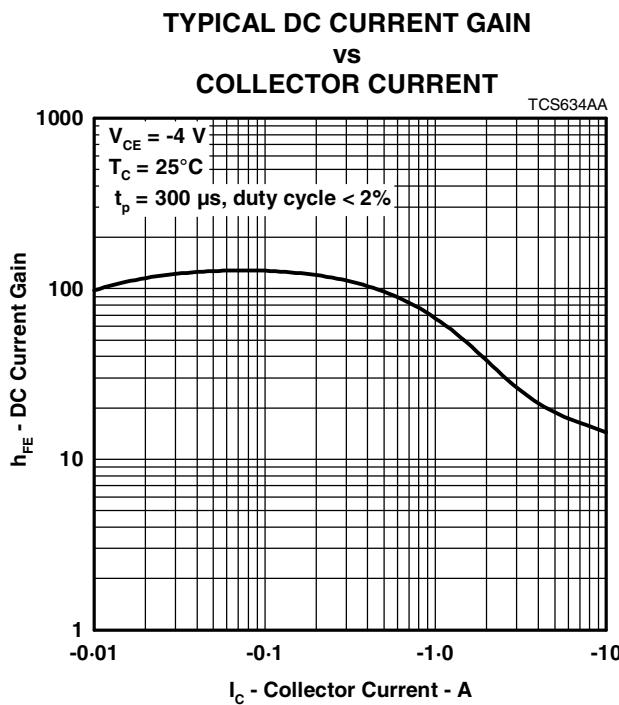


Figure 1.

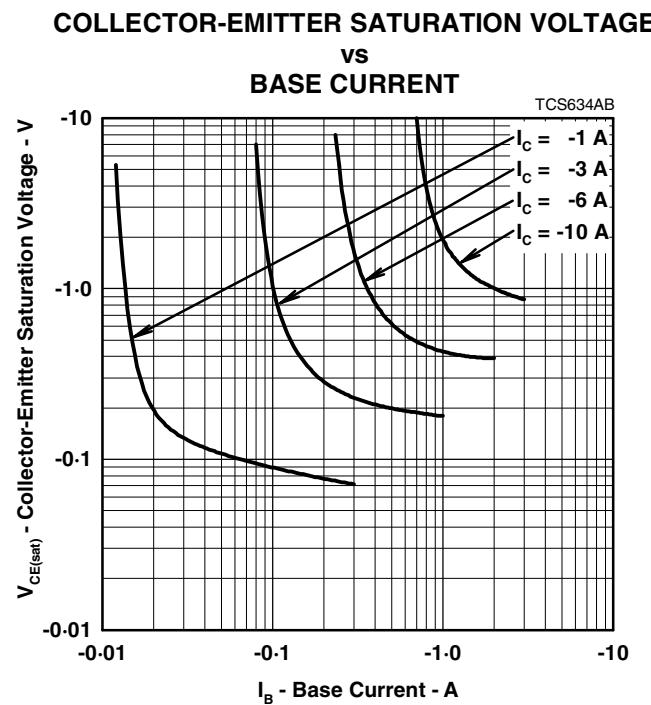


Figure 2.

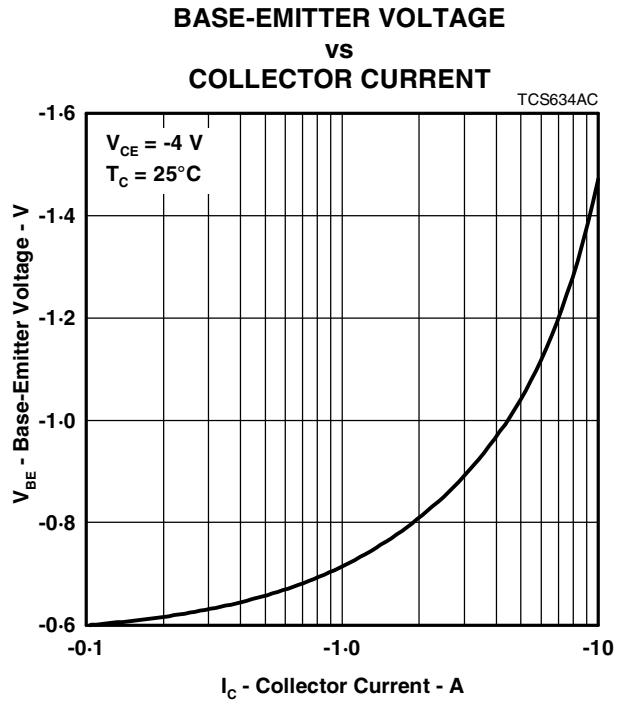


Figure 3.

PRODUCT INFORMATION

JULY 1968 - REVISED SEPTEMBER 2002
Specifications are subject to change without notice.

MAXIMUM SAFE OPERATING REGIONS

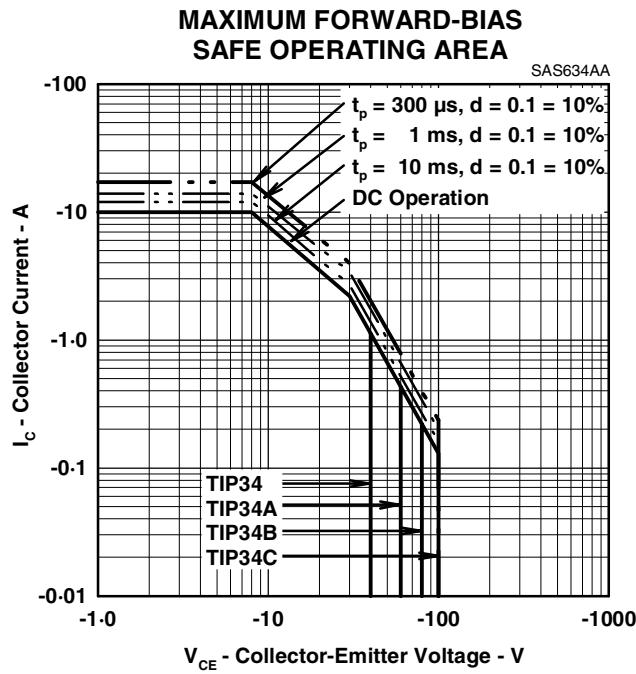


Figure 4.

THERMAL INFORMATION

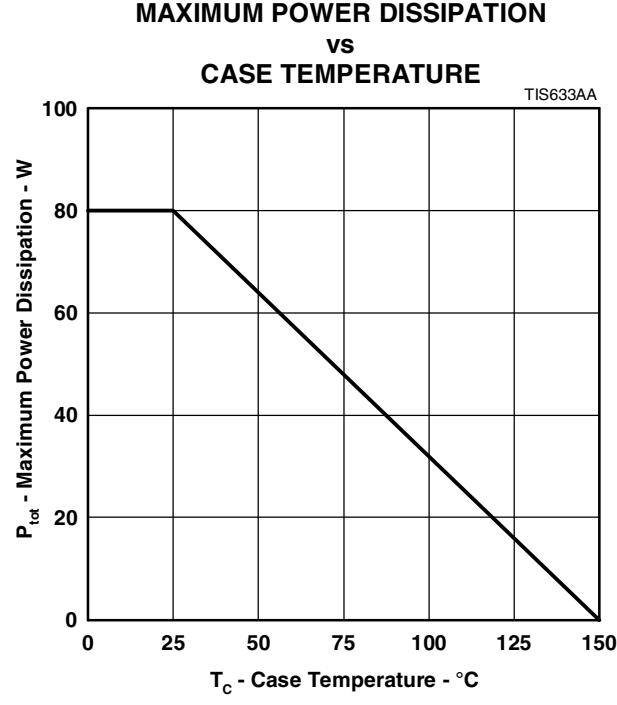


Figure 5.

PRODUCT INFORMATION