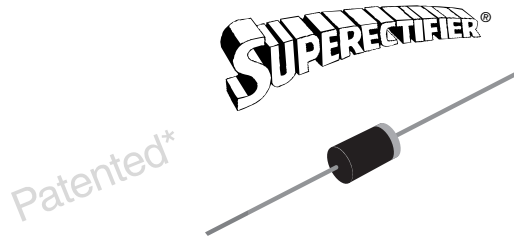


## Miniature Clamper/Damper Glass Passivated Rectifier


**DO-204AC (DO-15)**

\* Glass-plastic encapsulation technique is covered by Patent No. 3,996,602 of 1976; brazed-lead assembly by Patent No. 3,930,306 of 1976 and glass composition by Patent No. 3,752,701 of 1973

### FEATURES

- Superrectifier structure
- Cavity-free glass-passivated junction
- Low forward voltage drop
- Typical  $I_R$  less than 0.1  $\mu\text{A}$
- High forward surge capability
- Meets environmental standard MIL-S-19500
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC


**RoHS**  
COMPLIANT

### TYPICAL APPLICATIONS

For use in high voltage rectification of power supplies, inverters, converters and freewheeling diodes specially designed for clamping circuits, horizontal deflection systems and damper applications.

### MECHANICAL DATA

**Case:** DO-204AC, molded epoxy over glass body  
Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix for consumer grade, meets JESD 201 class 1A whisker test

**Polarity:** Color band denotes cathode end

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	2.0 A
$V_{RRM}$	1400 V, 1500 V
$I_{FSM}$	40 A
$I_R$	5.0 $\mu\text{A}$
$V_F$	1.1 V
$T_J \text{ max.}$	175 °C

MAXIMUM RATINGS ( $T_A = 25 \text{ }^\circ\text{C}$ unless otherwise noted)				
PARAMETER	SYMBOL	CGP20	DGP20	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	1400	1500	V
Maximum RMS voltage	$V_{RMS}$	980	1050	V
Maximum DC blocking voltage	$V_{DC}$	1400	1500	V
Maximum average forward rectified current 0.375" (9.5 mm) lead length at $T_A = 50 \text{ }^\circ\text{C}$	$I_{F(AV)}$	2.0		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	$I_{FSM}$	40		A
Maximum full load reverse current, full cycle average 0.375" (9.5 mm) lead length at $T_A = 100 \text{ }^\circ\text{C}$	$I_{R(AV)}$	200		$\mu\text{A}$
Operating junction and storage temperature range	$T_J, T_{STG}$	- 65 to + 175		°C

<b>ELECTRICAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)						
PARAMETER	TEST CONDITIONS		SYMBOL	CGP20	DGP20	UNIT
Maximum instantaneous forward voltage <sup>(1)</sup>	$I_F = 2.0\text{ A}$		$V_F$	1.1		V
Maximum reverse current <sup>(1)</sup>	rated $V_R$	$T_A = 25\text{ }^\circ\text{C}$ $T_A = 100\text{ }^\circ\text{C}$	$I_R$	5.0 100		$\mu\text{A}$
Maximum reverse recovery time	$I_F = 0.5\text{ A}, I_R = 50\text{ mA}$		$t_{rr}$	15	20	$\mu\text{s}$
Reverse recovery time	$I_F = 0.5\text{ A}, I_R = 1.0\text{ A},$ $I_{rr} = 0.25\text{ A}$	typical maximum	$t_{rr}$	1.0 1.5		$\mu\text{s}$
Typical junction capacitance	4.0 V, 1 MHz		$C_J$	15		pF

**Note:**

(1) Pulse test: 300  $\mu\text{s}$  pulse width, 1 % duty cycle

<b>THERMAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)				
PARAMETER	SYMBOL	CGP20	DGP20	UNIT
Typical thermal resistance <sup>(1)</sup>	$R_{\theta JA}$	55		$^\circ\text{C/W}$

**Note:**

(1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, P.C.B. mounted

<b>ORDERING INFORMATION</b> (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
CGP20-E3/54	0.425	54	4000	13" diameter paper tape and reel
CGP20-E3/73	0.425	73	2000	Ammo pack packaging

## RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

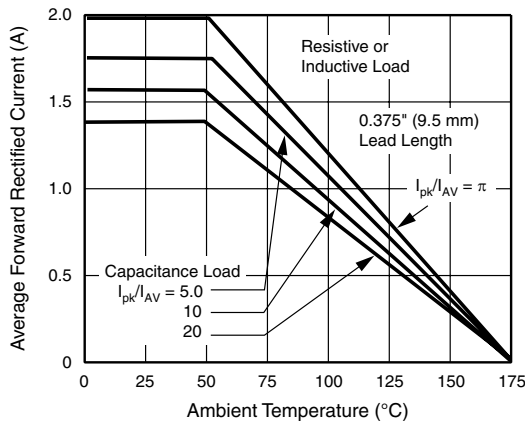


Figure 1. Forward Current Derating Curve

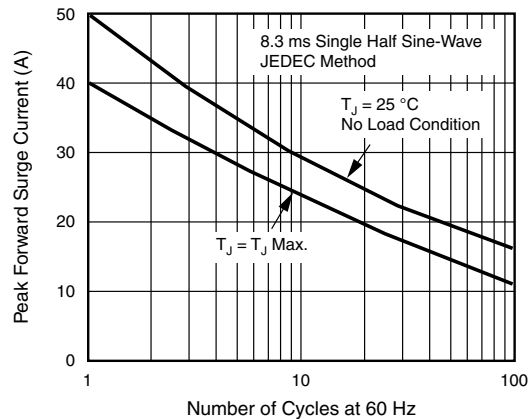


Figure 2. Maximum Non-repetitive Peak Forward Surge Current

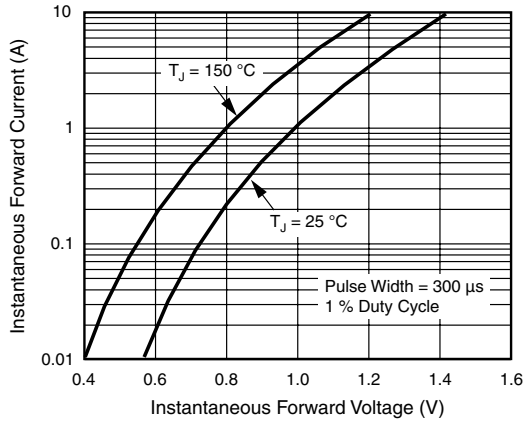


Figure 3. Typical Instantaneous Forward Characteristics

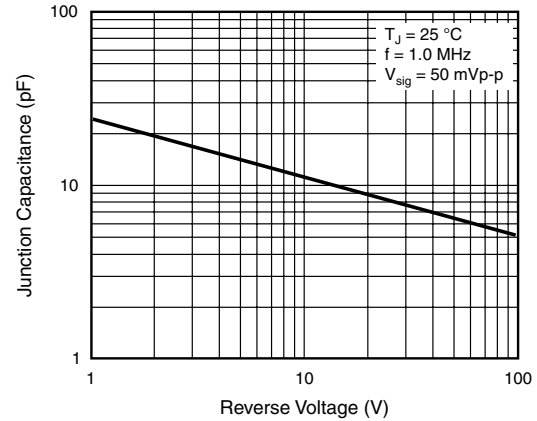


Figure 5. Typical Junction Capacitance


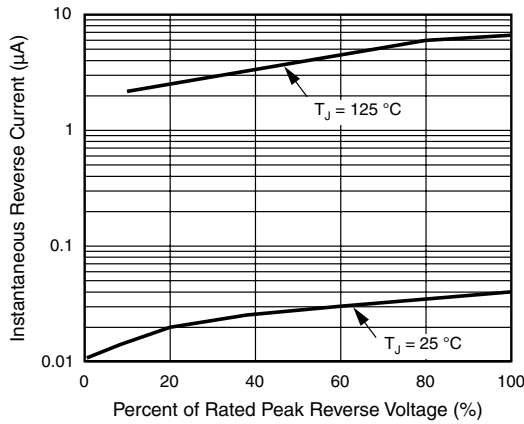


Figure 4. Typical Reverse Characteristics

### PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

#### DO-204AC (DO-15)



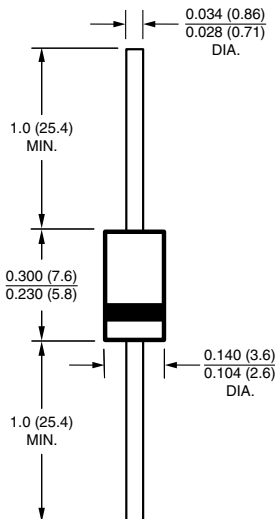

## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.