

REVISION BR

DO NOT SCALE FROM THIS PRINT

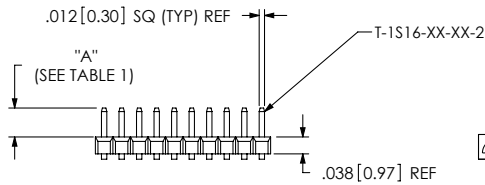
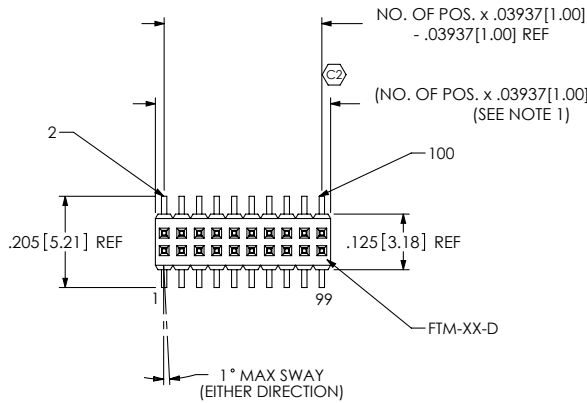


FIG. 1  
FTM-1XX-02-X-DV SHOWN


NOTES:

- 1. PARTS MAY BE CUT TO POSITION; .010 MAX CUT FLASH
- 2. SHEAR TAILS TO DIMENSION SHOWN; .003 MAX BURR.
- 3. NOTE DELETED.
- 4. (C1) REPRESENTS A CRITICAL DIMENSION FOR STATISTICAL PROCESS CONTROL.
- 5. NOTE DELETED.
- 6. NOTE DELETED.
- 7. POSITIONS -02 THRU -04 TO BE TUBE PACKAGED, AND POSITIONS -05 THRU -50 TO BE TAPE PACKAGED.
- 8. PARTS WITH -S OPTION ARE TO APPEAR AS SHOWN IN FIG 2 OR FIG 6 AT SAMTEC'S DISCRETION.
- 9. 4 POSITIONS MUST BE ADDED TO PART CALL OUT TO ALLOW FOR PUSH ON SHROUDS. EX: FTM-125-02-L-DV-S REQUIRES A 29 POSITION STRIP.


TABLE 1		
LEAD STYLE	"A"	TERMINAL
-02	(C3) .075 [1.91]	T-1S16-03-XX-2
-03	(C4) .065 [1.65]	T-1S16-04-XX-2

FTM-1XX-XX-XX-DV-XX

- No OF POSITIONS (PER ROW)  
 -02 THRU -50 (UNSHROUDED)  
 -05 THRU -46 (SHROUDED)
- LEAD STYLE  
 -02: .075 [1.91] POST HEIGHT  
 -03: .065 [1.65] POST HEIGHT
- PLATING SPECIFICATION  
 -F: FLASH SELECTIVE (USE T-1S16-XX-F-2)  
 -L: LIGHT SELECTIVE (USE T-1S16-XX-L-2)  
 -H: HEAVY GOLD (USE T-1S16-XX-H-2)  
 -G: GOLD (USE T-1S16-XX-G-2)  
 -FM: FLASH GOLD W/ MATTE TIN TAILS (USE T-1S16-XX-F-2)  
 -LM: LIGHT GOLD W/ MATTE TIN TAILS (USE T-1S16-XX-L-2)
- OPTION  
 -TR: TAPE & REEL PACKAGING  
 -P: PICK AND PLACE PAD (USE PPP-30) (USE PPP-30-NT FOR TAPE & REEL) (AVAILABLE ON POSITIONS -07 THRU -50) (SEE FIG. 4, SHT. 3)  
 -S: END SHROUDS (05 POS. MINIMUM) (SEE NOTE 8) (SEE NOTE 9)  
 PRESS FIT SHROUDS: SEE FIG. 2  
 MOLDED SHROUDS: SEE FIG. 6  
 -SA: END SHROUDS W/ ALIGNMENT PINS (SEE FIG. 3, SHT. 2) (SEE NOTE 9) (05 POS. PER ROW MINIMUM, 46 POS. PER ROW MAXIMUM) (USE FTM-XX-D. USE FTMH-75-D-ES-XX-X FOR MOLDED END SHROUDS)
- ROW OPTION  
 -DV: DUAL VERTICLE

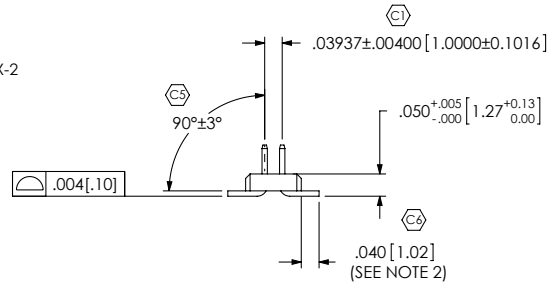

PATENT NUMBERS  
5655914 / 5785536



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: DECIMALS ANGLES .XX: ±.01 [3] .XXX: ±.005 [13] .XXXX: ±.0020 [051]	PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.	<b>samtec</b> 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail: info@SAMTEC.com code: 55322
MATERIAL: BODY: VECTRA E130 COLOR: BLACK TERMINAL: PHOS BRONZE	DO NOT SCALE DRAWING SHEET SCALE: 1:0.3333 MAX FLASH ALLOWED: .002 [05] MAX GATE VESTIGE ALLOWED: .002 [05]	DESCRIPTION: 1mm x 1mm LOW PROFILE SMT STRIP ASM DWG. NO. FTM-1XX-XX-XX-DV-XX BY: B MENEAR 2/13/2006 SHEET 1 OF 3

REVISION BR

FIG. 2

-S OPTION  
FTM-1XX-02-X-DV-S SHOWN  
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1) (SEE NOTE 8) (SEE NOTE 9)  
(PRESS FIT SHROUDS TO HAVE 8 UNUSED SOLDER TAILS AS SHOWN)






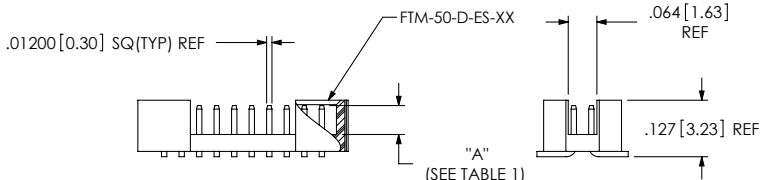


FIG. 6

-S OPTION: MOLDED SHROUD  
FTM-1XX-02-X-DV-S SHOWN  
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1) (SEE NOTE 8)

FIG. 3

-SA SHOWN: PRESS FIT SHROUD  
FTM-1XX-02-X-DV-SA  
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1)  
(SEE NOTE 9)

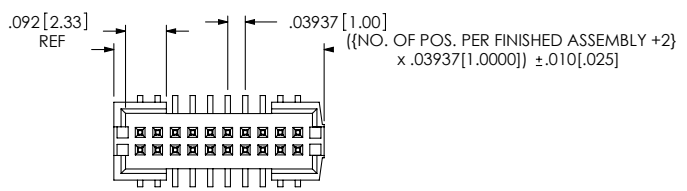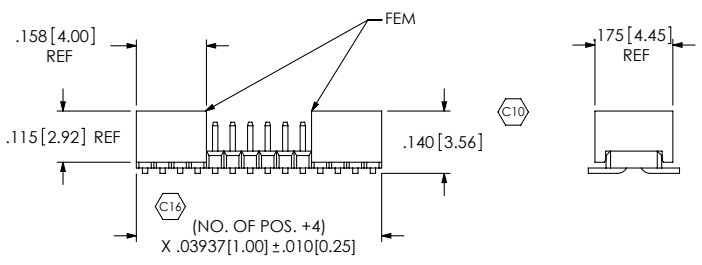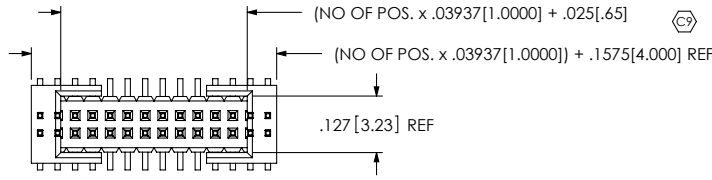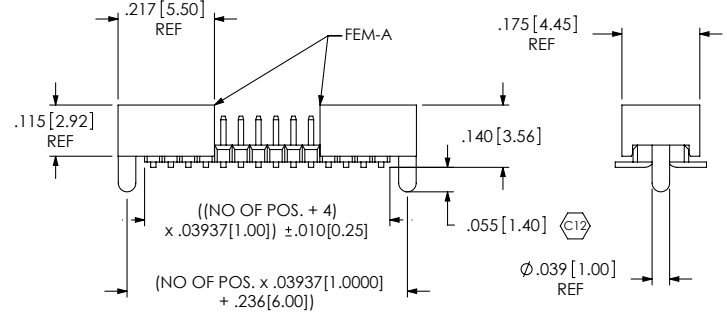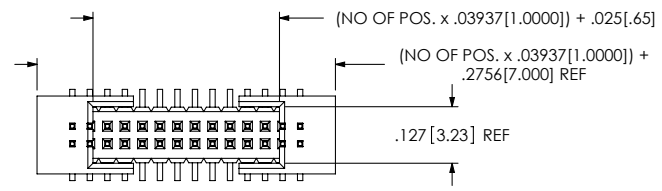

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150  
PHONE: 812-944-6733 FAX: 812-948-5047  
e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:  
1mm x 1mm LOW PROFILE SMT STRIP ASM

DWG. NO. FTM-1XX-XX-XX-DV-XX


BY: B MENEAR 2/13/2006 SHEET 2 OF 3

F:\DWG\MISC\MKTG\FTM-1XX-XX-XX-DV-XX-MKT.SLDDRW

REVISION BR

FIG. 4

(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1)


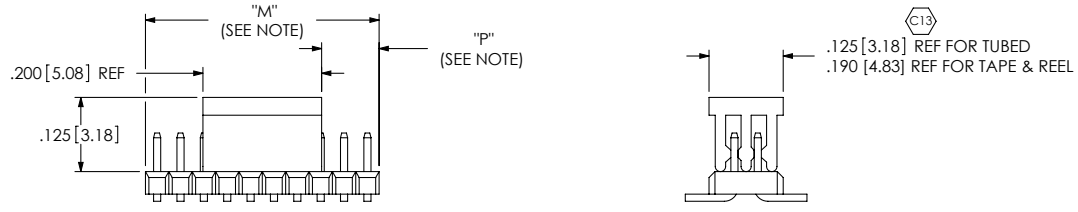


NOTE: "M" = USED MEASURED DIMENSION (REF)  
 "P" =  $\{ ("M" - .200 [5.08]) / 2 \} +/- .020 [51]$

PACKAGING VIEW

PACKAGING TABLE		
OPTIONS	PACKAGING TUBE	PLUGS
W/O OPTION	PT-1-24-01-49	TP-30
-P	PT-1-24-01-43	TP-24
-S, -S-P, -SA, -SA-P	PT-1-24-13-09	TP-24

(SEE NOTE 7) NOTE: ONLY POSITIONS -05 THRU -50 ARE TO BE TUBED. POSITIONS -02 THRU -04 TO BE LAYER PACKAGED ONLY. INSERT PLUG TP-30 AT AN ANGLE INTO PT-1-24-01-49. PLUG MUST SUPPORT THE INSULATOR.



F:\DWG\MISC\MKTG\FTM-1XX-XX-XX-DV-XX-MKT.SLDDRW

**PROPRIETARY NOTE**  
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 4:1

**samtec**  
 520 PARK EAST BLVD, NEW ALBANY, IN 47150  
 PHONE: 812-944-6733 FAX: 812-948-5047  
 e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION: 1mm x 1mm LOW PROFILE SMT STRIP ASM

DWG. NO. FTM-1XX-XX-XX-DV-XX

BY: B MENEAR 2/13/2006 SHEET 3 OF 3