



Alle Rechte vorbehalten / All rights reserved

5 4 3 2 1

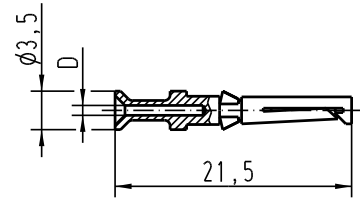

Bestell-Nummer / Part No.		D	Leiterquerschnitt wire gauge		Abisolierlänge der Litze stripping length
versilbert silver plated	vergoldet gold plated		mm ²	AWG	
09 15 000 6204	09 15 000 6224	0,90	0,14-0,37	26-22	8
09 15 000 6203	09 15 000 6223	1,10	0,5	20	
09 15 000 6205	09 15 000 6225	1,30	0,75	18	
09 15 000 6202	09 15 000 6222	1,45	1	18	
09 15 000 6201	09 15 000 6221	1,75	1,5	16	
09 15 000 6206	09 15 000 6226	2,25	2,5	14	
09 15 000 6207		0,90	0,14-0,37	26-22	

1) Nur für Buchanan Crimpwerkzeug Einstell \varnothing 1,0/
only for Buchanan crimping tool adjusting \varnothing 0,1

		All Dimensions in mm Original Size DIN A 4		Techn. Character.			Nicht tolerierte Masse / free size tolerances																			
				<table border="1"> <tr> <td></td> <td>Dat.</td> <td>Name</td> </tr> <tr> <td>Detail.</td> <td>22.03.99</td> <td>Kö</td> </tr> <tr> <td>Insp.</td> <td></td> <td>SDT</td> </tr> <tr> <td>Stand.</td> <td></td> <td></td> </tr> </table>			Dat.	Name	Detail.	22.03.99	Kö	Insp.		SDT	Stand.			<table border="1"> <tr> <td colspan="2">Maststab / Scale</td> </tr> <tr> <td colspan="2" style="text-align: center;">2:1</td> </tr> </table>		Maststab / Scale		2:1		Han D / R15 Buchsenkontakt Crimpkontakt gedreht 10A crimpcontact twisted 10A		
	Dat.	Name																								
Detail.	22.03.99	Kö																								
Insp.		SDT																								
Stand.																										
Maststab / Scale																										
2:1																										
		410609 15.07.03 DY 25592 Mod. Dat. Name		HARTING Electric GmbH & Co. KG D-32339 Espelkamp 			TB 09 15 000 62.. Sub.																			
							Blatt / page																			