


All rights reserved

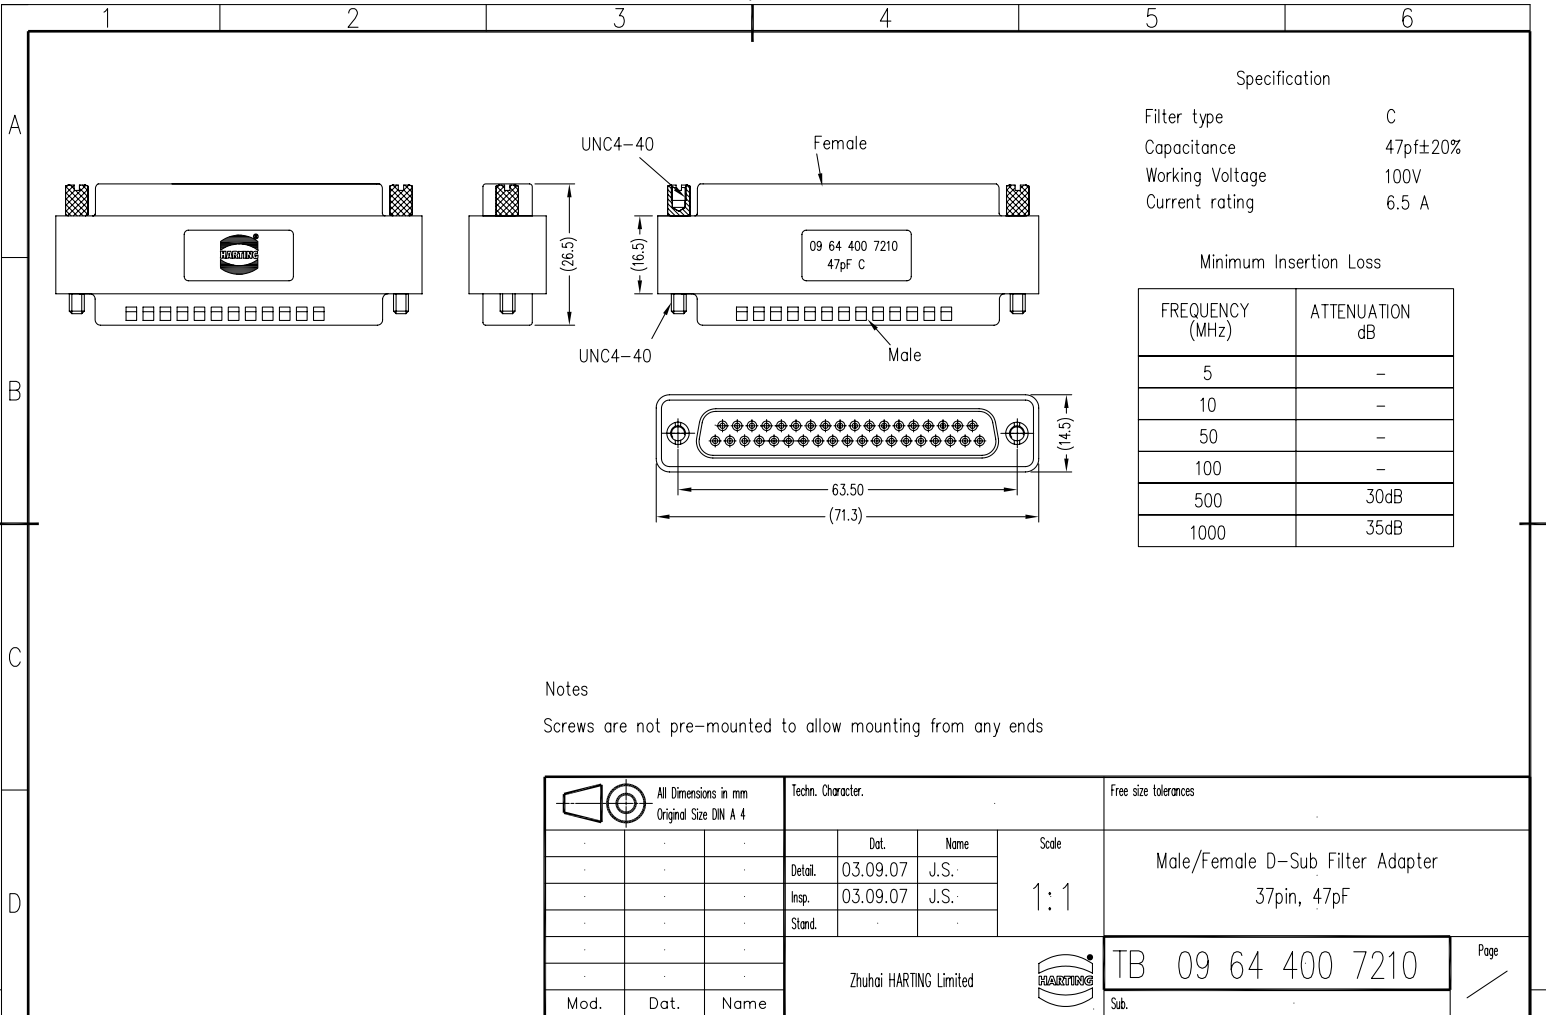

Specification

Filter type	C
Capacitance	47pF±20%
Working Voltage	100V
Current rating	6.5 A

Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

Notes

Screws are not pre-mounted to allow mounting from any ends

<p>All Dimensions in mm Original Size DIN A 4</p>	Techn. Character.			Free size tolerances				
		Dat.	Name		Scale 1:1			
	Detail.	03.09.07	J.S.					
	Insp.	03.09.07	J.S.					
	Stand.							
Mod.	Dat.	Name	Zhuohai HARTING Limited					
				<table border="1"> <tr> <td>TB 09 64 400 7210</td> <td>Page</td> </tr> <tr> <td>Sub.</td> <td></td> </tr> </table>	TB 09 64 400 7210	Page	Sub.	
TB 09 64 400 7210	Page							
Sub.								