

TECHNICAL CHARACTERISTICS

MATERIAL  
 CONTACT MATERIAL: COPPER ALLOY  
 CONTACT TYPE: STAMPED  
 CONTACT PLATING: TIN  
 QUALITY CLASS: 25 MATING CYCLES  
 PITCH: FOR 3.00MM

ENVIRONMENTAL  
 OPERATING TEMPERATURE: -25 UP TO 105°C  
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
 CURRENT RATING: 5A  
 WORKING VOLTAGE: 250V AC  
 INSULATOR RESISTANCE: >1000 MOHM  
 DIELECTRIC WITHSTANDING VOLTAGE: 1500V AC/MN  
 CONTACT RESISTANCE: 10 mOHM MAX

WIRE DIMENSION:  
 AWG: AWG 20 - 24

PACKAGING  
 REEL OF 10KPCS

DIMENSION

AWG	A	B	C	D
20 - 24	2.50	2.95	2.30	2.00

RoHS Compliant

G	13-SEP-10	PACKAGING	GG
F	16-FEB-09	DRAW	JP
E	09-AUG-08	T&R DESCRIPTION	RB
D	30-JUN-08	QTY/REEL	CH
C	01-MAR-07	UPDATE	EC
B	04-DEC-06	DRAW/PACKAGING	JP
A	11-DEC-02	PDF	JP
REV	DATE	FILE	BY

PROJECTION:	
APPROVAL: RJ	


GENERAL TOLERANCE
.X = +/- 0.2
.XX = +/- 0.15
UNIT: MM
SCALE:
SHEET: 1/2
DRAW: MIKE

**WE**  
 WÜRTH ELEKTRONIK

DESCRIPTION: 3.00MM FEMALE CRIMP TERMINAL  
 WERI PART NO: 66200113722

SIZE  
**A4**

1 2 3 4 5

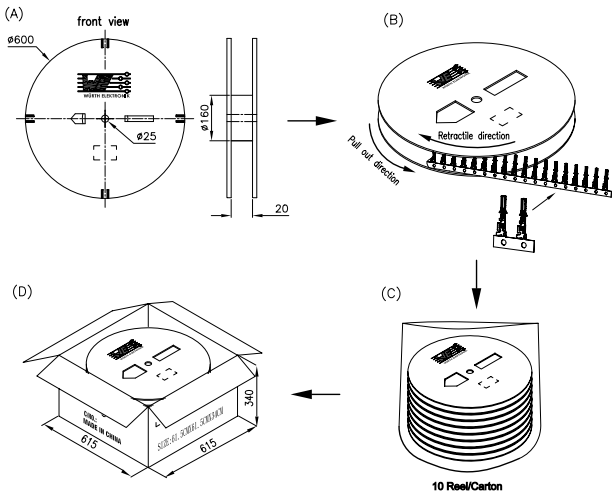

Note :

1. All dimensions meet EIA-481-3 requirements.
2. Material : WH Conductive polystyrene Alloy.
3. Thickness :  $0.50 \pm 0.05$ mm.
4. Component load per reel : 10000 pcs.
5. Reel size : diameters 160\*25, T=20.
6. Reel chipboard size : diameters 600\*25, T=7.
7. Bag size : 900\*900\*0.06.
8. Carton size : 615\*615\*340.

Q'tY/Reel	Reel/Carton	Q'tY/Carton
10Kpcs	10	100Kpcs

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		DESCRIPTION: 3.00MM FEMALE CRIMP TERMINAL	SIZE <b>A4</b>
G								
F								
E								
D								
C								
B								
A								
REV	DATE	FILE	BY	APPROVAL:	UNIT: MM			
					SCALE:			
					SHEET: 2/2		WERI PART NO: 6620 01 13722	
					DRAW: MIKE			