



27  
28  
29




## Applications

- Household appliances
- Electronics
- Machinery

## Benefits

- Up to 100,000 cycles
- Various terminals on-hand
- Small tolerances and hysteresis available
- Response temperatures from 0°C up to 260°C

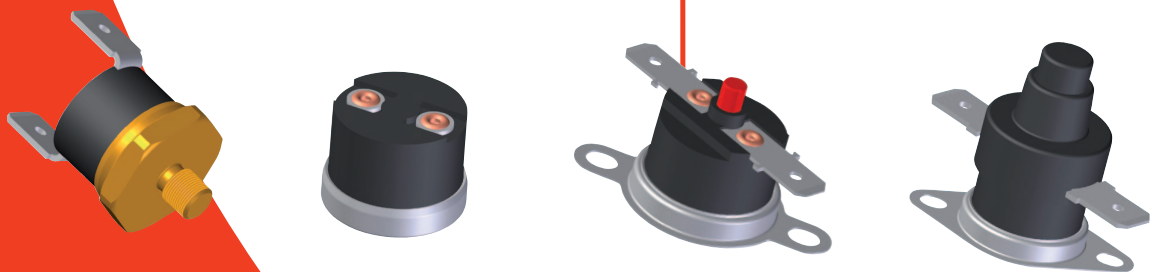

**MICROTHERM**

















Microtherm International Cooperation









## Technical data

control type		R28				R27		R29	
		11EN	03EN	52N	60EN <sup>1)</sup>	05EN	15N	23EN	
ratings									
function		automatic				manual			
version		normally closed / normally open				normally closed			
VDE	rated current at 250 Vac ( cos φ 0,95 )	16 A	10 A	10 A	10 A	16 A	16 A	16 A	
	switching cycles	10,000	100,000	100,000	100,000	6,000	6,000	3,000	
	temperature range T <sub>a</sub> ( steps in 5 K )	0°C ... 150°C	0°C ... 150°C	0°C ... 230°C <sup>2)</sup>	0°C ... 150°C	0°C ... 150°C	0°C ... 250°C	0°C ... 150°C	
UL	rated current at 250 Vac ( cos φ 1,0 )	10 A	10 A	10 A	—	10 A	10 A	10 A	
	switching cycles	100,000	100,000	100,000	—	6,000	6,000	6,000	
	temperature range T <sub>a</sub> ( steps in 5 K )	0°C ... 150°C	0°C ... 150°C	0°C ... 230°C	—	0°C ... 150°C	0°C ... 250°C	0°C ... 150°C	
tolerance		T <sub>a</sub> < 100°C: ± 3 K / T <sub>a</sub> > 100°C: ± 4 K / T <sub>a</sub> > 140°C: ± 5 K							
contact resistance		< 30 mΩ							
hysteresis / reset temperature		T <sub>a</sub> < 100°C: 10 K ± 4 K / T <sub>a</sub> > 100°C: 15 K ± 5 K / T <sub>a</sub> > 140°C: 20 K ± 5 K				customer-specific			
degrees of protection provided by enclosures (EN 60529)		IP00 ( R28 60EN IP54)							
suitable for use in protection class		I, II							
approvals	VDE / ENEC	EN 60730-1 / -2-9							
	UL	UL 873							
	CSA	C22.2 No. 24 <sup>3)</sup>							













<sup>1)</sup> not approved    <sup>2)</sup> type R28 55H up to 260°C    <sup>3)</sup> different approved ratings

## Standard types


type	nc	no	code	illustration	drawing dimensions ( mm )	technical description	approvals
R28 11EN	1	3	standard dielectric strength 2,000 Vac			terminals 6.3 x 0.8, housing thermosetting plastic 9mm, moving bracket small, cap aluminium	VDE, UL, CSA
R28 03EN	1	3	standard dielectric strength 2,000 Vac			terminals 6.3 x 0.8, housing thermosetting plastic 12mm, moving bracket small, cap aluminium	VDE, UL, CSA
R28 52N	1	3	standard dielectric strength 2,000 Vac			terminals 6.3 x 0.8, housing ceramic 12mm, moving bracket small, cap aluminium	VDE, UL, CSA
R27 05EN	1		manual dielectric strength 1,800 Vac			terminals 6.3 x 0.8, housing thermosetting plastic, moving bracket small, cap aluminium, reset pin	VDE, UL, CSA
R27 15N	1		manual dielectric strength 1,800 Vac			terminals 6.3 x 0.8, housing ceramic, moving bracket small, cap aluminium, reset pin ceramic	VDE, UL, CSA
R29 23EN	1		manual dielectric strength 2,000 Vac			terminals 6.3 x 0.8, housing thermosetting plastic, moving bracket small, cap aluminium, reset pin	VDE, UL, cUL
R28 60EN	1	3	tight against humidity dielectric strength 1,800 Vac			lead wire 1.25mm <sup>2</sup> , housing thermosetting plastic, fix bracket, cap aluminium, degree of protection IP54	—

code	used in type	illustration	drawing dimensions ( mm )	technical description	approvals
4	R27, R28, R29			moving bracket, small	VDE, UL, CSA
3	R27, R28, R29			moving bracket	VDE, UL, CSA
S	R27, R28, R29			stud of M5 x 6 brass, SW17 (also other variations available)	VDE, UL, CSA
B (+A)	R27, R28, R29		 execution of drawing: 45 deg	fix bracket possible angles: 0 / 45 / 90 / 135 deg	VDE, UL, CSA


# Terminals

code	used in type	illustration	drawing dimensions ( mm )	technical description	approvals
brass: 05 (0 deg) brass: 10 (45 deg) brass: 06 (90 deg) steel: 95 (0 deg) steel: 96 (90 deg)	R27, R28, R29			terminals 4.8 x 0.5 brass nickel plated up to T <sub>a</sub> max. 150°C >150°C steel nickel plated also available: angle 45 / 90 deg	VDE, UL, CSA
brass: 45 (0 deg) brass: 46 (90 deg)	R27, R28, R29			terminals 4.8 x 0.8 brass nickel plated up to T <sub>a</sub> max. 150°C also available: angle 90 deg	VDE, UL, CSA
brass: 03 (0 deg) brass: 09 (45 deg) brass: 04 (90 deg) steel: 93 (0 deg) steel: 94 (90 deg)	R27, R28, R29			terminals 6.3 x 0.8 brass nickel plated up to T <sub>a</sub> max. 150°C >150°C steel nickel plated also available: angle 45 / 90 deg	VDE, UL, CSA
00	R27, R28			solder terminals	VDE, UL, CSA
41 (0 deg) 42 (90 deg)	R27, R28, R29			solder terminals, nickel plated, also available: angle 90 deg	VDE, UL, CSA
SA	R27, R28			PCB terminals solder terminals	VDE, UL, CSA

## ■ Caps



Cap Code 1 in standard execution ( $T_a$  50°C – 199°C), material aluminium



Cap Code T ( $T_a$  0°C – 50°C and  $T_a \geq 200^\circ\text{C}$  and all normally open types), material aluminium


Deviations from standard controls (caps, terminals, fixings) on request.

Especially for electronic applications with voltage 6...120 Vac / 6...30 Vdc and current 10...100 mA, there are switches with crossbar-contacts available.

Controls as single operation device (SOD) up to 150°C and reset temperature -35°C are available (type 81ES).

## ■ Ordering and marking example

### Ordering example

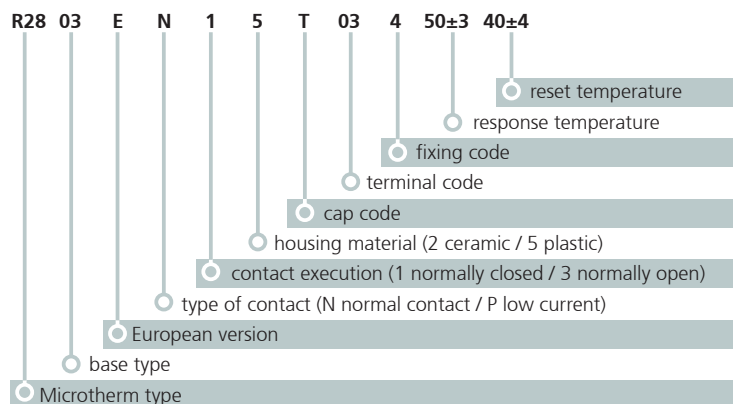

### Marking example

**A100** norm. closed (B norm. open) response temperature  
**03EN XXXX** type manufacture code  
**XXXX** date of manufacture



Representation office:

**Microtherm GmbH**  
Taschenwaldstraße 3  
P.O. Box 1208  
D-75112 Pforzheim

Fon: +49 (0)7231 787-0  
Fax: +49 (0)7231 787-155  
E-Mail: [info@microtherm.de](mailto:info@microtherm.de)  
Internet: [www.microtherm.de](http://www.microtherm.de)

Deviations from standard controls on request.

**MICROTHERM**



Microtherm International Cooperation