


Pin Assignments

Pin#	1	+12V
	2	NC
	3	Output
	4	0V
	5	Input (+)
	6	Input (-)

Mounting Hole Dimensions

Model	ØA	ØB
SCD03PSR	0.7	1.2
SCD05PSR	1.0	1.5
SCD10PSR	1.2	1.7
SCD15PSR	1.5	2.0
SCD20PSR	1.8	2.3

Characteristics of SCD15PSR

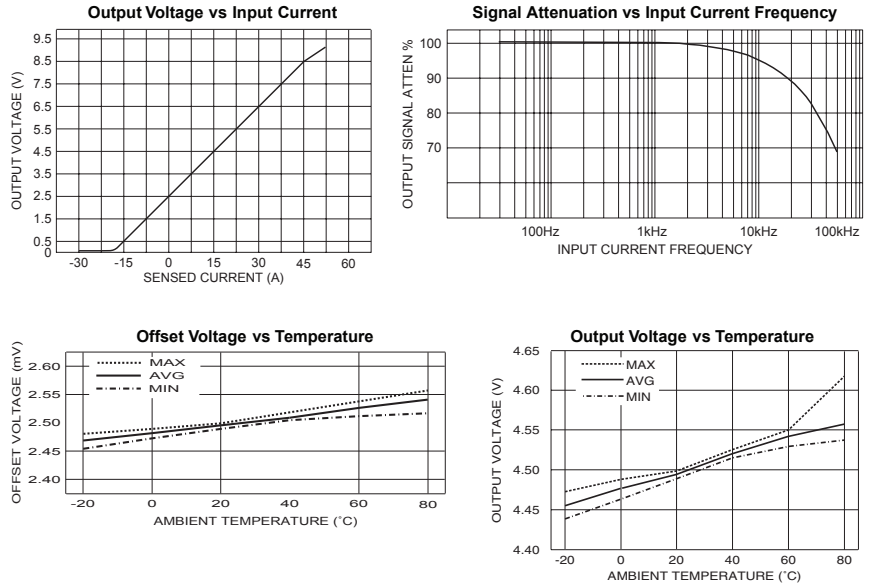

Ordering Information

SCD□□PSR

Current Rating:
 03: 3A
 05: 5A
 10: 10A
 15: 15A
 20: 20A

Input Voltage:
 A: ±15VDC
 B: ±12VDC
 S: ±12VDC
 T: ±5VDC
 U: ±5VDC

Input Current Polarity:
 N: +(DC only)
 R: ± (bipolar)

SPECIFICATIONS

(V_{CC} = +12V, R_L = 10kΩ, T_a = 25°C)

Model	SCD03PSR	SCD05PSR	SCD10PSR	SCD15PSR	SCD20PSR
Rated Current	±3A	±5A	±10A	±15A	±20A
Linearity Range	+3A -3A	+5A -5A	+10A -10A	+15A -15A	+20A -20A
Output Voltage	4.5V ±30mV @ +Rated Curr.; 0.5V ±30mV @ -Rated Curr.				
Zero Current Offset Voltage	+2.5V ±20mV max. (after demagnetization)				
Output Voltage Linearity	± 0.5 % @ rated current				
Supply Voltage	+12V ±5%				
Max Current Consumption	±25mA max.				
Response	3 μS typ. @ 50 Amp/Turns/μS				
Output V Temp Char	± 0.1%/°C max. @ rated current				
Zero Current Offset V Temp Char	± 1.5mV/°C max.				
Hysteresis	8mV max. @ rated current to 0A				
Primary Overcurrent	10X rated current, 50 mS, no damage				
Withstand Voltage	2000 VAC, 50/60Hz, 1 minute between primary coil & terminal				
Insulation Resistance	500 VDC between primary coil & terminal				
Operating Temp	-10° to +75° C				
Storage Temp	-10 to +90°C				



20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-612-2300
 800-275-4899
 Fax: 503-612-2383
 Website: www.cui.com

TITLE: current sensor	REV: A
PART NO. SCDXXPSR	UNITS: MM
DRAWN BY: JRH	APPROVED BY: SCALE:

REV. A	DESCRIPTION NEW DRAWING	DATE 05/15/2009
--------	-------------------------	-----------------