



The SF22 series is a compact vertically mounted device designed to achieve reliable switching. Mounting is in the top or bottom of the tank from the inside, so requires access to the inside of the tank.



- **Stainless steel**
- **Compact design**
- **Temperature range to 120°C**
- **User configurable N/O or N/C action**

They are manufactured in 316 grade Stainless Steel.

The switch action may be reversed by removing the float, inverting it and then refitting it to the stem.

Technical Specification

Mounting style	Internal	Cable length - standard	350mm
Mounting thread	1/8" BSP	Cable size	17/0.10 - AWG22
Float & Stem material	316 grade	Cable conductor material	Tinned copper
Maximum Temperature	120°C	Cable sheath material	XLPE
Maximum Pressure	10 bar	Cable temperature rating	125°C
Float SG	0.7	Sealing gasket	Not supplied
Minimum fluid SG	0.8	Tightening torque for fixing nut	2.0kg/cm

Electrical Specification

Contact Form	N/O or N/C
Switching Power Max. VA	50
Switching Current Max. A	0.5
Switching Voltage AC	300
Switching Voltage DC	300
Breakdown Voltage Min. DC	600

All ratings are for resistive load only.

Standard Parts


SSF22X035

Leadouts

35cm XLPE wires

Mechanical Dimensions

All dimensions are in millimeters (inches)

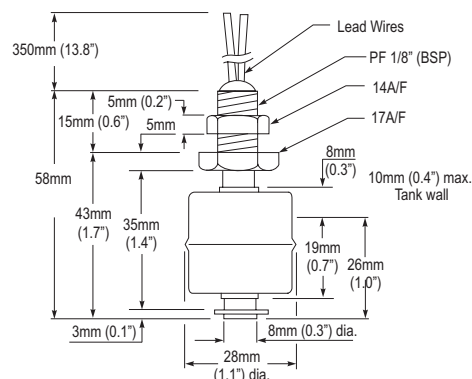

USA

Cynergy3 Components
2320 Paseo de las Americas, Suite 104
San Diego, CA 92154
Sales & Tech Support (866) 258-5057
Email: sales@cynergy3.com

EUROPE - UK

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969
Fax +44 (0) 1202 891918
Email: sales@cynergy3.com