


# SD2420

## Silicon Photodiode

### FEATURES

- Miniature, hermetically sealed, pill style, metal can package
- 48° (nominal) acceptance angle
- Wide operating temperature range (- 55°C to +125°C)
- Ideal for direct mounting to printed circuit boards
- Mechanically and spectrally matched to SE2460 and SE2470 infrared emitting diodes

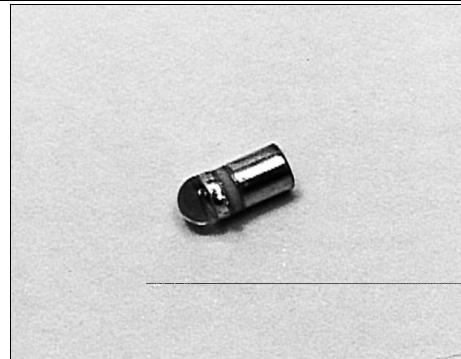


INFRAS-1.TIF

### DESCRIPTION

The SD2420 is a PN silicon photodiode mounted in a hermetically sealed, glass lensed, metal can package. This package directly mounts in double sided PC boards.

### OUTLINE DIMENSIONS in inches (mm)

Tolerance    3 plc decimals     $\pm 0.005(0.12)$   
              2 plc decimals     $\pm 0.020(0.51)$

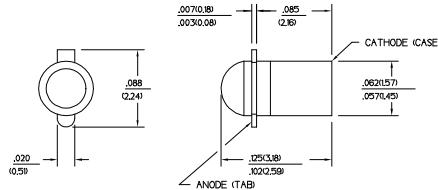

DIM\_014.cdr

# SD2420

## Silicon Photodiode

ELECTRICAL CHARACTERISTICS (25°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Light Current SD2420-002	I <sub>L</sub>		7.0		μA	V <sub>R</sub> =20 V H=20 mW/cm <sup>2</sup> (1)
Dark Current	I <sub>D</sub>			5.0	nA	V <sub>R</sub> =20 V H=0
Reverse Breakdown Voltage	V <sub>BR</sub>	50			V	I <sub>R</sub> =10 μA
Angular Response (2)	Ø		48		degr.	I <sub>F</sub> =Constant
Rise And Fall Time	t <sub>r</sub> , t <sub>f</sub>		50		ns	V <sub>R</sub> =20 V R <sub>L</sub> =50 Ω

Notes

1. The radiation source is a tungsten lamp operating at a color temperature of 2870°K.
2. Angular response is defined as the total included angle between the half sensitivity points.

### ABSOLUTE MAXIMUM RATINGS


(25°C Free-Air Temperature unless otherwise noted)

Cathode Anode Voltage	50 V
Power Dissipation	125 mW (1)
Operating Temperature Range	-55°C to 125°C
Storage Temperature Range	-65°C to 150°C
Soldering Temperature (10 sec)	260°C

Notes

1. Derate linearly from 25°C free-air temperature at the rate of 1.19 mW/°C.

### SCHEMATIC

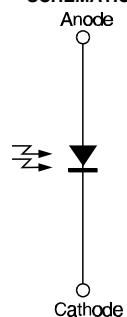


Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

# Honeywell


# SD2420

## Silicon Photodiode


**SWITCHING TIME TEST CIRCUIT**

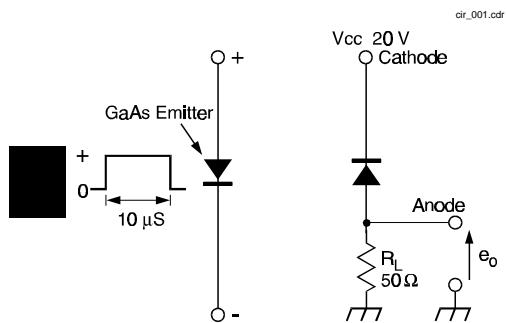


**Fig. 1 Responsivity vs Angular Displacement**

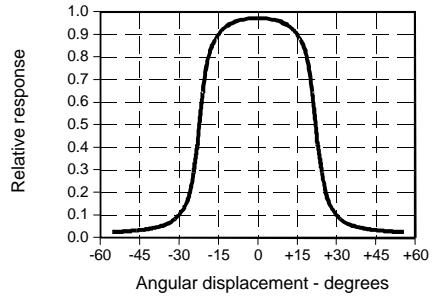


**SWITCHING WAVEFORM**

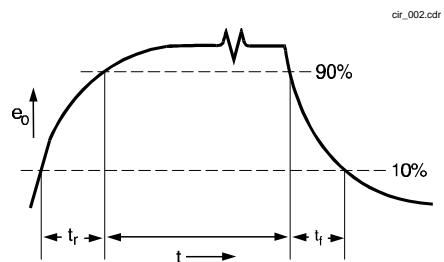

**Fig. 2 Dark Current vs Temperature**

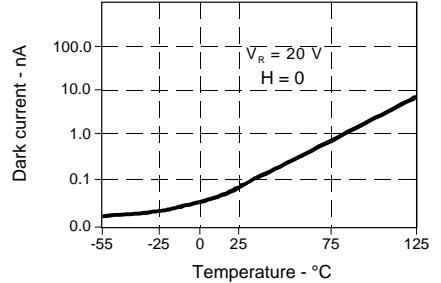

**Fig. 3 Spectral Responsivity**

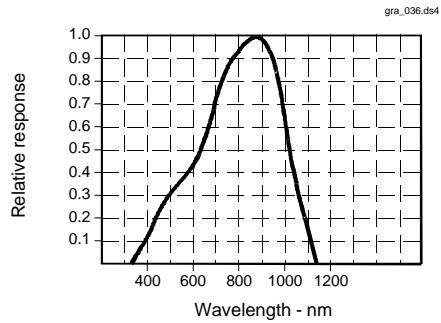

All Performance Curves Show Typical Values

# **SD2420**

Silicon Photodiode

---



Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

**Honeywell**

87