

Specification Status: RELEASED

Electrical Rating
Voltage: **30V MAX**
Current: **40A MAX**

Lead Material:
20 AWG Tin/Lead Plated Copper

Marking:
None

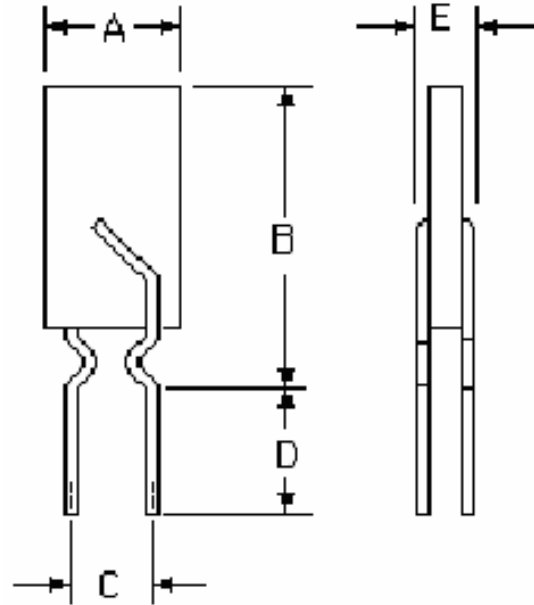


TABLE I. DIMENSIONS:

	A		B		C	D	E	
	MIN	MAX	MIN	MAX	TYPICAL	MIN	MIN	MAX
mm:	7.1	8.1	15.0	16.3	5.0	7.6	--	2.8
in*:	(0.28)	(0.32)	(0.59)	(0.64)	(0.2)	(0.3)	--	(0.11)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD 20°C	CURRENT RATINGS				TIME TO TRIP SECONDS AT 20°C, 8A MAX	RESISTANCE OHMS AT 20°C		ONE-HOUR POST-TRIP RESISTANCE STANDARD TRIP OHMS AT 20°C MAX	NOMINAL TRIPPED POWER DISSIPATION WATTS AT 20°C
	HOLD	TRIP	HOLD	TRIP		MIN	MAX		
2.5	2.5	4.9	2.0	3.7	5.0	0.031	0.044	0.080	1.75

Recognitions: UL, CSA, TUV recognized.
Reference Documents: PS300
Precedence: This specification takes precedence over documents referenced herein.
Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.