

PERFORMANCE CHARACTERISTICS


CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)  
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)  
OPERATING TEMPERATURE -55°C TO 125°C  
CONTACT RESISTANCE 20 mΩ MAX  
INSERTION FORCE 0.75 N MAX /CONT  
EXTRACTION FORCE 0.15 N MIN /CONT  
INSULATION RESISTANCE 10<sup>10</sup> MΩ MIN

NOTES

- 1. LEAD FREE INDICATOR : LF- LEAD FREE
- 2. PERFORMANCE LEVEL INDICATOR (REF DWG No. BSA.C.201844.003)
- 3. THIS PRODUCT IS CSA APPROVED
- 4. THIS PRODUCT IS UL RECOGNISED
- 5. FIR: RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA.201.572001
- 6. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

LAY OUT  
P.C.B.-HOLE

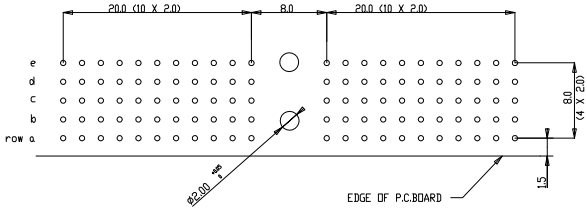

Material		Spec ref		Tolerance		Projection	
Mtl code		✓		±0.10		MM	
Heat treat				±0.10		MM	
Plating/Finish				±0.10		MM	
rev	qpn no	sp	date	Dr	4. 8. 92	J.V.B	Product Family
A	000000	00	04-08	Eng			MILLIPACS
B	00-000	0000	08/06/05	Dr			Model Name
C	000-000	0000	05/06/05	Spec			Model Revision
D	000-000	0000	05/09/07	Spec			Model Revision
E	000-000	0000	05/09/09	Spec			Model Revision
				MPACS 5+2R RA RCP		BS.C.201418.001	
				CONN TYPE A		Rev. E	

PDM: Rev: E Status: Released