

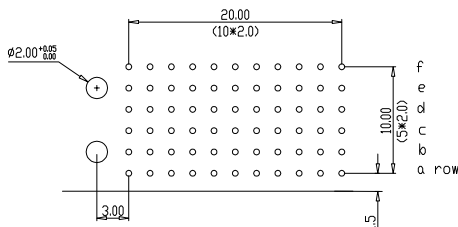



Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or communication to third parties is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

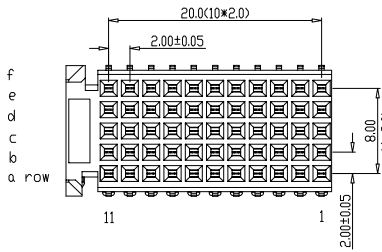

LAY-OUT
P.C.B.- HOLE

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE : 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE : 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN/CONT
INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES 1. LEAD FREE INDICATOR LF=LEAD FREE
PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC 201844203)
2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BSA201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material		Spec ref		tolerance IEC : ± 0.2 IEC SPEC : ± 0.1 SPEC ANGLES : ± 1° HIDDEN	projection MM
Mat code		Heattreat		size A4 Scale 2,000	
Plating/Finish		Dr V.Panis 07-04-92		Model Name MILLIPACS	
Eng		Chr		Model Revision	
Appr		Product family		ECN	
Rev		Title		REL Level	
ECN no		date		Rev.	
A 0105-0085 KN 14-09-01		MPACS 5+2R RA RCP		BSC201444003 E	
B 105-0085 ALEX 02-06-05		CONN TYPE C		E	
C 1005-0278 Kason 02-08-05		HM2R03PA5101----		CUSTOMER DRAWING	
D 3007-0042 Kason 05-09-07		Pro/E file		sheet 1 of 1	
E 1010-0110 NZ 05-30-10		catalog no			
- - - - -					
05 REC 9.3546 RM 110601					