
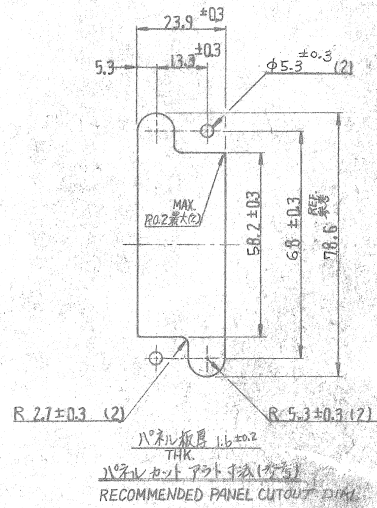
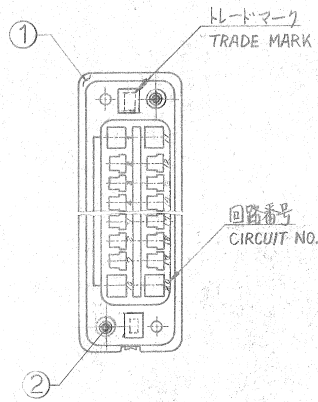
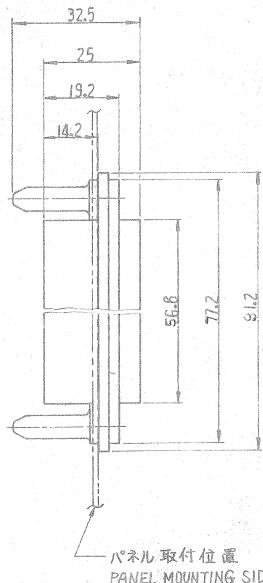


DIMENSIONS IN MM. DO NOT SCALE PRINT. P/NO. 51-200, 23-25459

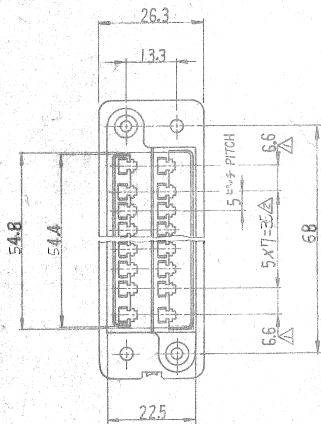

- NOTES:
- △ FOR POWER CIRCUITS (4 POS.)
  - △ FOR SIGNAL CIRCUITS (16 POS.)
  - 3. ACCOMMODATED CONTACTS ARE  
STRIP P/N 170311, 170312, 170494  
L.P. P/N 170313, 170314, 170485
  - 4. FEMALE HSG P/N IS 173033
  - 5. RPOD SPEC 108-5125, APPLICATION SPEC 114-5044

- 注記:
- △ 電源回路用(4極)
  - △ 信号回路用(16極)
  - 3. 本ハウジングに使用可能なコネクタは  
連続型番 170311, 170312, 170484  
バラ型番 170313, 170314, 170485
  - 4. 本ハウジングに適合する雌ハウジングは 173033
  - 5. 製品規格番号 108-5125  
取付 適用規格番号 114-5044

C-173032			
0 RELEASED (1994-7-28) YI KG 7/22			
LTR	変更 (REVISION RECORD)	DR	CHK DATE

2 #	172925-1	SPRINGS-FILL	JIS B 2802 3Y22	2
1 #	173030-3	RESINER EQUI. MALE HSG	20P HSG SPEC 4mm	1
#	番号 (NUMBER)	名称 (NAME)	插塞 (REMARKS)	件 No.
独立部品 (REQUIRED PER ASSEMBLY)		© 1972 by AMP (Japan), Ltd. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING		
材料 (MATERIAL)		適合規格範囲 (WIRE RANGE) mm <sup>2</sup> (AWG)		
仕上 (FINISH)		被覆外径 (INSULATION DIA.) mm (IN)		
色 (COLOR)		分類 (CLASS) 規格 (TYPE)		
DR	3-24-84	TOLERANCE	1=1	LOC
CHK	K. Sakuma	EXCEPT		SIZE
DE		AS NOTED		数量 (QTY)
APP		名称 (NAME)	20極雌ハウジング用ハウジングコネクタ	
		20 PDS MALE HSG ASSY DRAWER CONNECTOR		