


All rights strictly reserved. Reproduction or issue to third parties in any form
 whatsoever is not permitted without written authority from the proprietor.
 Property of ©FCJ ELECTRONICS Copyright FCJ ELECTRONICS INC.


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite
 sous quelque forme que ce soit sans autorisation écrite du propriétaire.
 Propriété de ©FCJ ELECTRONICS. Droits de reproduction FCJ ELECTRONICS INC.




PRODUCT NO.
SEE TABLE

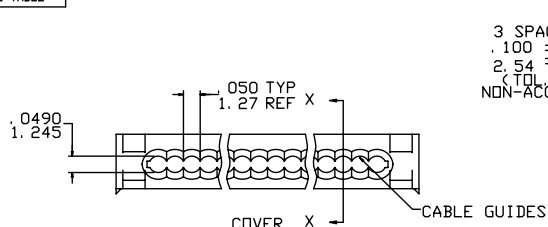


COVER X
CABLE GUIDES
MATERIAL: 30% GLASS-FILLED POLYESTER,
FLAME RETARTANT PER UL 94 V-0,
COLOR: BLUE

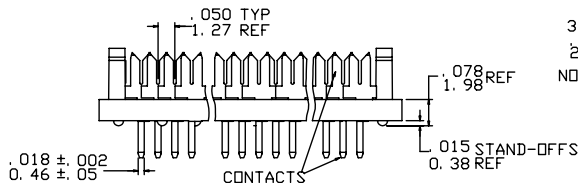


CONTACTS
MATERIAL: PHOSPHORUS BRONZE,
FULL HARD. SEE TABLE AND
NOTES FOR PLATING.

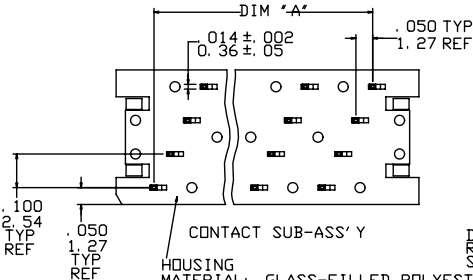



CONTACT SUB-ASS'Y
HOUSING
MATERIAL: GLASS-FILLED POLYESTER,
FLAME RETARTANT PER UL 94 V-0,
COLOR: BLUE

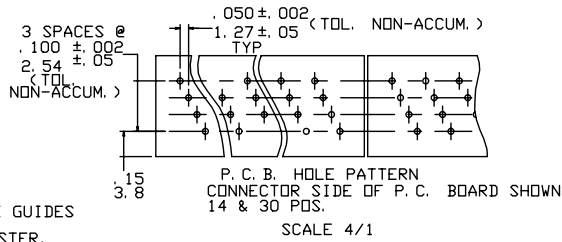

P. C. B. HOLE PATTERN
CONNECTOR SIDE OF P. C. BOARD SHOWN
14 & 30 POS.
SCALE 4/1

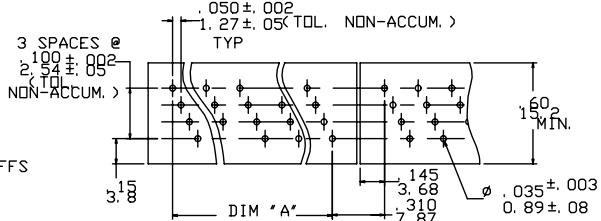

P. C. B. HOLE PATTERN
CONNECTOR SIDE OF P. C. BOARD SHOWN (NOTE 3)
10, 26, 34 & 50 POS.
SCALE 4/1

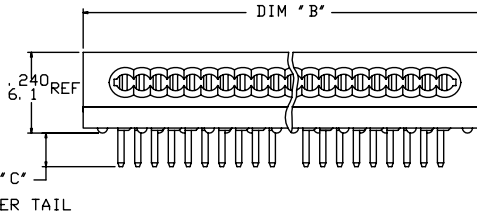

SECTION X-X

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		FCJ www.fcjconnect.com	
ltr	ecn no	dr	date	linear	.XX ± .01	projection	1	title	QUICKIE P.C.B. CONNECTOR		
P	V11058	JM	6/12/91	angles	.XXX ± .005	INCH/MM	2.5:1	10,14,26,30,34, & 50 POS.			
R	V50805	LSS	7/5/95		.XXX ± .0020	scale	2.5:1	product family	65495		
S	N05-0123	ZC	5/9/05		0° ± 2°	sheet	1 of 2	size	dwg no		
T	N07-0199	WG	08/27/07	dr	J.MUSTARD 6/12/91	cage code		4			
				engr	M.SMYK 6/12/91	status	Released	Printed: Apr 12, 2014			
				chr	W.FUNK 6/12/91						
				appd	M.SMYK 6/12/91						
sheet	revision	T	T								
index	sheet	1	2								

form no. 7530-001-103

PDM: Rev:T

STATUS Released



Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.
 Property of ©FCJ ELECTRONICS. Copyright FCJ ELECTRONICS INC. Droits de reproduction FCJ ELECTRONICS INC.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
 Property of ©FCJ ELECTRONICS. Copyright FCJ ELECTRONICS INC.

	NO. OF POS.	DIM "A"	DIM "B"	DIM "C" REF	SEE NOTE
65495-017(LF)	10	.450/11.43	.700/17.78	.100/2.54	1
-018(LF)				2	
-019(LF)				1	
-020(LF)				2	
-021(LF)	26	1.250/31.75	1.500/38.10	.100/2.54	1
-022(LF)				2	
-023(LF)				1	
-024(LF)				2	
-025(LF)	34	1.650/41.91	1.900/48.26	.100/2.54	1
-026(LF)				2	
-027(LF)				1	
-028(LF)				2	
-029(LF)	50	2.450/62.23	2.700/68.58	.100/2.54	1
-030(LF)				2	
-031(LF)				1	
-032(LF)				2	
-033(LF)	14	.650/16.51	.900/22.86	.100/2.54	1
-034(LF)				2	
-035(LF)				1	
-036(LF)				2	
-037(LF)	30	1.450/36.83	1.700/43.18	.100/2.54	1
-038(LF)				2	
-039(LF)				1	
65495-040(LF)				2	

NOTES:

- ① 50u"/1.27uM MIN. Ni UNDERPLATE OVER ENTIRE TERMINAL. AND Au FLASH ON SOLDER TAIL ONLY.
- ② 65495-***: 150u"/3.81uM MIN. TIN/LEAD 93/7 OVER ENTIRE TERMINAL. 50u"/1.27uM MIN. Ni UNDERPLATE.
 65495-***LF: 150u"/3.81uM MIN. MATTE TIN OVER ENTIRE TERMINAL. 50u"/1.27uM MIN. Ni UNDERPLATE.
- ③ SEE TA 247 FOR MORE INFORMATION.
4. PATTERN SHOWN FOR CENTER TEN CONTACTS IS TYPICAL FOR ALL CONNECTOR LENGTHS, EXCEPT 14 & 30 POSITIONS.
5. SUB-ASSEMBLY & COVER PACKED SEPARATELY.
6. THE HOUSING OF XXXX-XYLLF WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER PROCESS.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY	 www.fcjconnect.com
ltr	ecm no	dr	date	linear	
T				.XX ±.01/.0±.3	 INCH/MM
				.XXX ±.005/.00±.13	
				.XXX ±.0020/.000±.051	QUICKIE P.C.B CONNECTOR
				angles 0° ±2°	10,14,26,30,34,& 50 POS.
				dr J.MUSTARD 6/11/91	product family
				enrg M.SMYK 6/11/91	size
				chr W.FUNK 6/11/91	dwg no
				appd M.SMYK 6/11/91	scale
sheet	revision	T			1:1
index	sheet	2			A
					65495
					sheet
					2 of