


-XXXY	STYLE	SEE SHEET
-998ELF	"A"	1
-998ZLF	"B"	2

PART NUMBER			DIM. "A"	DIM. "B"
DPF 3	XX	-XXXLYF		
	08		3	.300
	14		6	.600
	16		7	.700

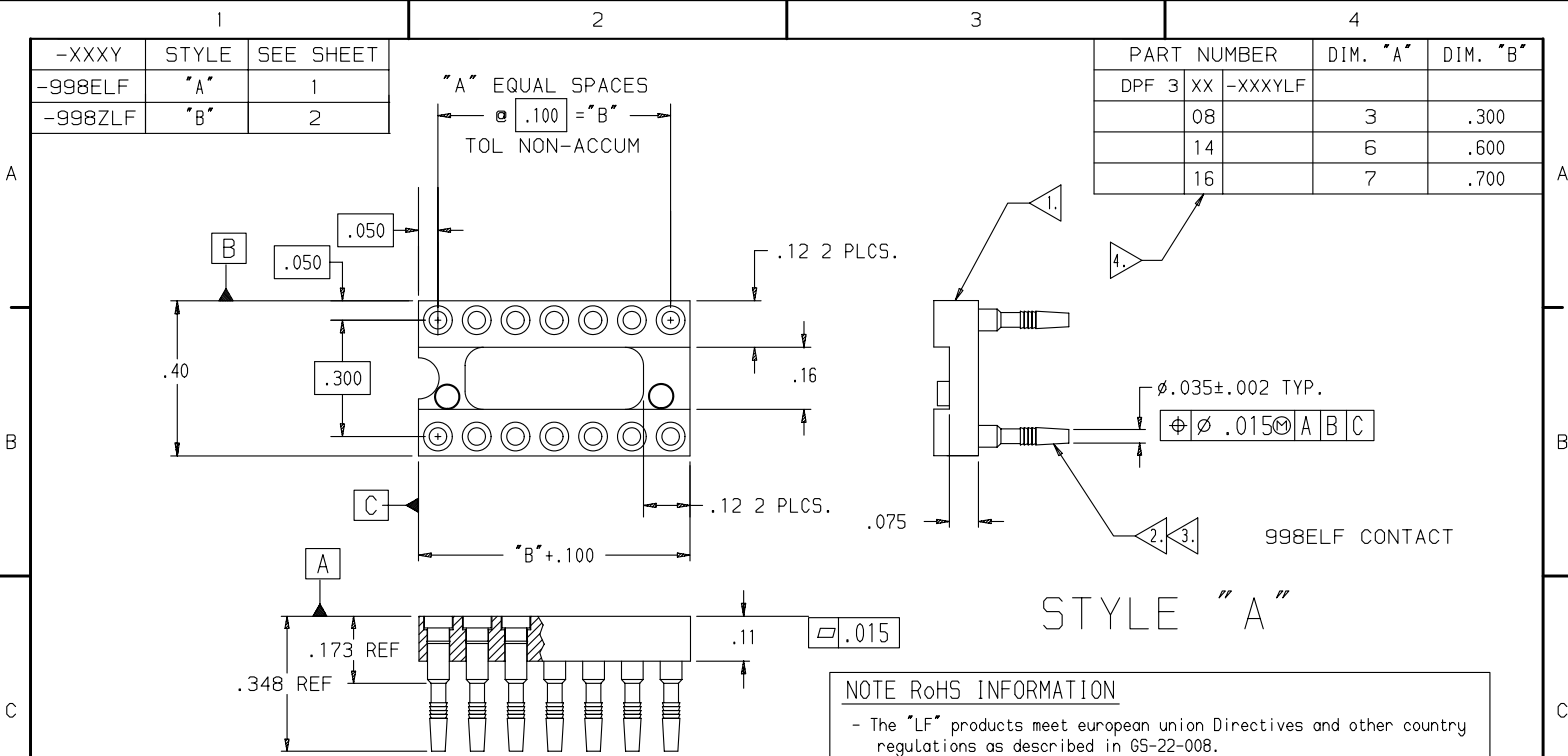

STYLE "A"

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in G5-22-008.
- Packaging spec: see G5-14-920


NOTES:

- 1 INSULATOR MATERIAL:
GLASS FILLED POLYESTER (PCT),
RATED UL 94V-0, COLOR BLACK.
- 2 CONTACT MATERIAL:
OUTER SHELL: BRASS ALLOY 360, 1/2 HARD, PER ASTM B16.
INNER CONTACT: BERYLLIUM COPPER, ALLOY 172, PER ASTM B194.
- 3 CONTACT PLATING:
OUTER SHELL: 80-120u" TIN/LEAD PER SAE AMS-P-81728
OUTER SHELL: 80-120u" TIN for LF VERSION
OVER 100u" NICKEL PER QQ-N-290.
INNER CONTACT: #4(30), 200u" TIN/LEAD PER SAE-AMS-P-81728
INNER CONTACT: #4(30), 200u" TIN for LF VERSION
OVER 50u" NICKEL PER QQ-N-290.
- 4 NUMBER OF POSITIONS.

rev	ecn no	dr	date
H	LS07-0271	HLE	2007/10/29
J	LS07-0299	HLE	2007/11/20
K	LS08-0038	STG	2008/02/01
L	LS08-0051	HLE	2008/02/11
-	-	-	-
-	-	-	-
g	LS07-0141	HLE	2007/05/21

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection A3	inch Scale 1:1
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	D-WOLFORD	2000/02/14	ANGULAR	0.X	±0.1
Eng	A-VASBINDER	2000/02/14	LINEAR	0.XX	±0.1
Chr	A-VASBINDER	2000/02/14	0.XX	0.XXX	±0.1
Appr	A-VASBINDER	2000/02/14	Product family		SOCKET
FCI TITLE PRESS FIT DIP SOCKET				ECN LS08-0051	
DPF				Spec ref RELEASED	
catalog no				58707	
SEE TABLE				CUSTOMER sheet 1 of 2	

Copyright FCI.

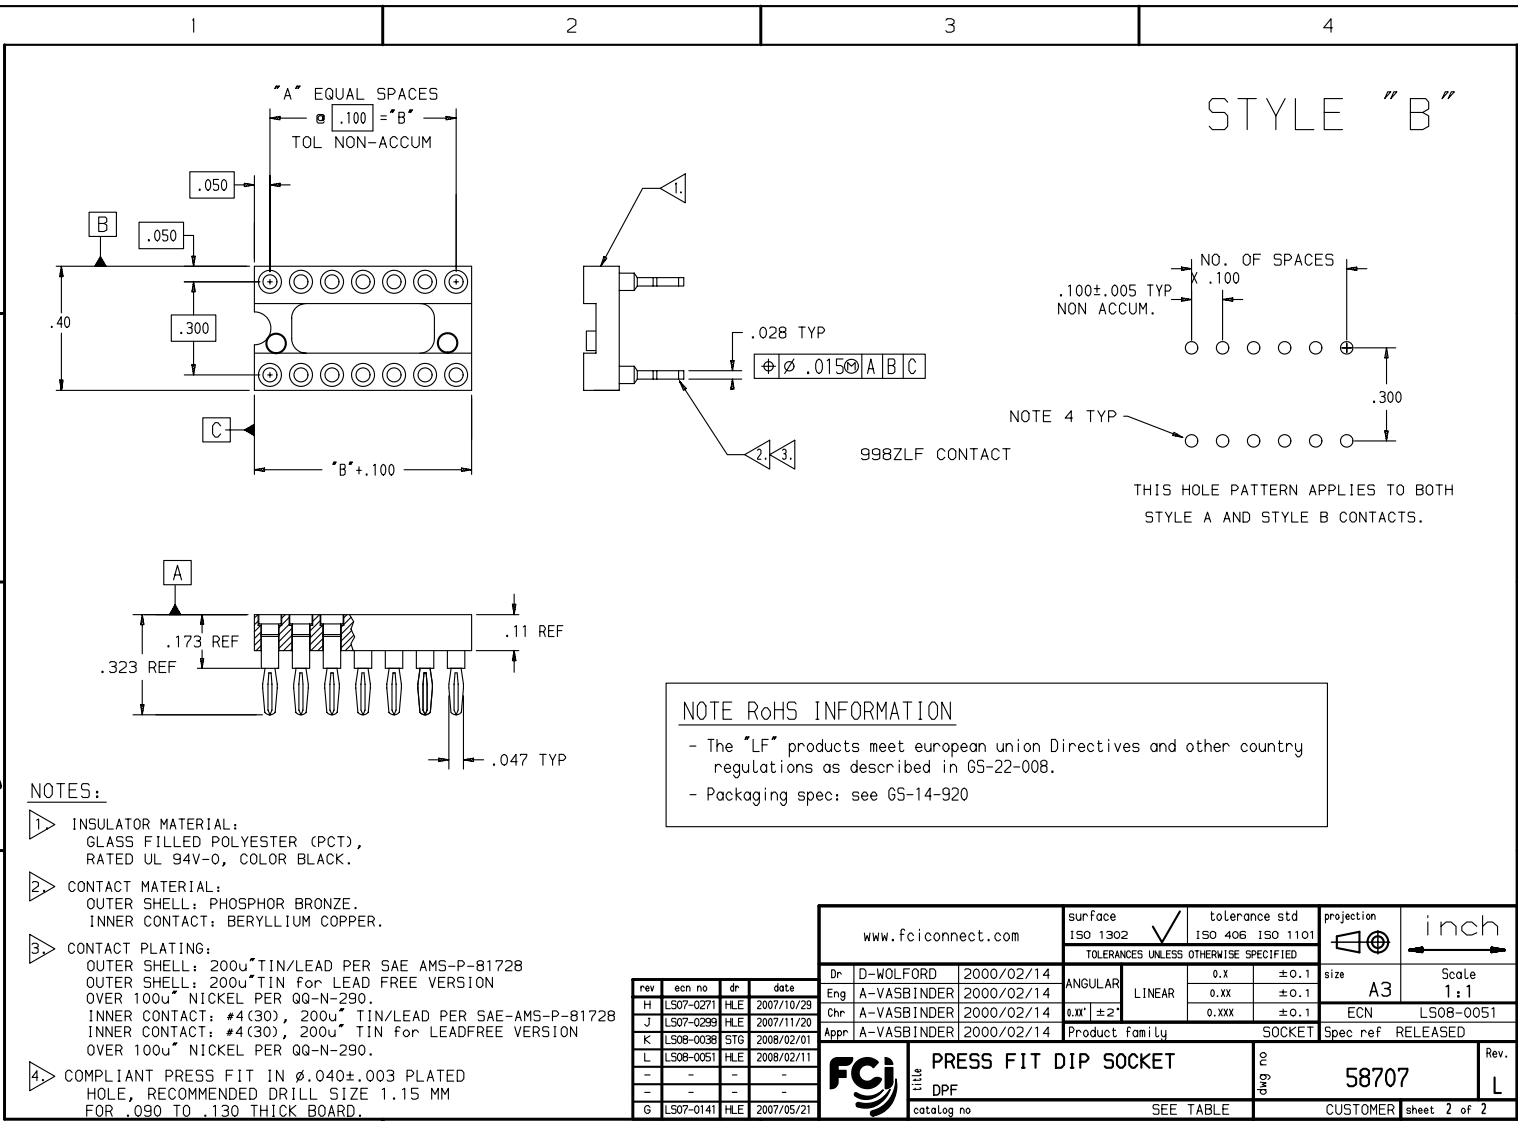

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in 65-22-008.
- Packaging spec: see 65-14-920

NOTES:

- 1 INSULATOR MATERIAL:
GLASS FILLED POLYESTER (PCT),
RATED UL 94V-0, COLOR BLACK.
- 2 CONTACT MATERIAL:
OUTER SHELL: PHOSPHOR BRONZE.
INNER CONTACT: BERYLLIUM COPPER.
- 3 CONTACT PLATING:
OUTER SHELL: 200u" TIN/LEAD PER SAE AMS-P-81728
OUTER SHELL: 200u" TIN for LEAD FREE VERSION
OVER 100u" NICKEL PER QQ-N-290.
INNER CONTACT: #4(30), 200u" TIN/LEAD PER SAE-AMS-P-81728
INNER CONTACT: #4(30), 200u" TIN for LEADFREE VERSION
OVER 100u" NICKEL PER QQ-N-290.
- 4 COMPLIANT PRESS FIT IN $\phi .040 \pm .003$ PLATED
HOLE, RECOMMENDED DRILL SIZE 1.15 MM
FOR .090 TO .130 THICK BOARD.

rev	ecn no	dr	date
H	LS07-0271	HLE	2007/10/28
J	LS07-0299	HLE	2007/11/20
K	LS08-0038	STG	2008/02/01
L	LS08-0051	HLE	2008/02/11
G	LS07-0141	HLE	2007/05/21

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection A3	inch Scale 1:1
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	D-WOLFORD	2000/02/14	ANGULAR	0.X	± 0.1
Eng	A-VASBINDER	2000/02/14	LINEAR	0.XX	± 0.1
Chr	A-VASBINDER	2000/02/14	$\pm .01$	0.XXX	± 0.1
Appr	A-VASBINDER	2000/02/14	Product family		SOCKET
				ECN	LS08-0051
				Spec ref	RELEASED
FCI TITLE PRESS FIT DIP SOCKET			58707		Rev. L
catalog no			SEE TABLE	CUSTOMER sheet 2 of 2	