
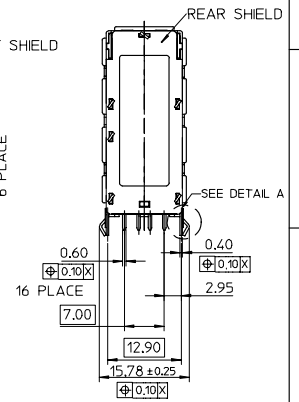

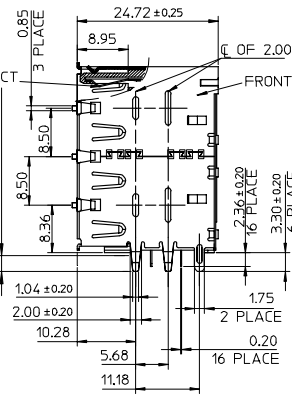

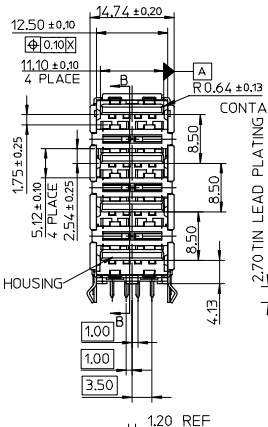





NOTE:  
 1. MATERIAL:  
 HOUSING: THERMOPLASTIC POLYESTER WITH GLASS FIBER FILLED.  
 UL 94V-0, COLOR: BLACK.  
 COVER: THERMOPLASTIC POLYESTER WITH GLASS FIBER FILLED. UL 94V-0, COLOR: BLACK.  
 CONTACT: PHOSPHOR BRONZE  
 FRONT SHIELD: BRASS  
 REAR SHIELD: BRASS  
 GROUND FINGER: BRASS  
 2. FINISH:  
 CONTACT : 30 MICRONCH GOLD PLATED IN CONTACT AREA.  
 150 MICRONCH-250 MICRONCH TIN PLATED ON SOLDER TAILS.  
 NICKEL UNDERPLATED OVER ALL.  
 FRONT SHIELD: 100 MICRONCH TIN PLATED ON ENTIRE WITH  
 NICKEL UNDERPLATED OVER ALL.  
 REAR SHIELD: NICKEL PLATED WITH 120 MICRONCH MINIMUM.  
 GROUND FINGER: 100 MICRONCH TIN PLATED ON ENTIRE WITH  
 NICKEL UNDERPLATED OVER ALL.  
 3. PRODUCT SPECIFICATION: REFER TO PS-67857-004  
 4. PACKAGING: REFER TO PK-67857-002  
 5. TEST SUMMARY: REFER TO TS-67857-004  
 6. LEAD-FREE AND ROHS COMPLIANCE

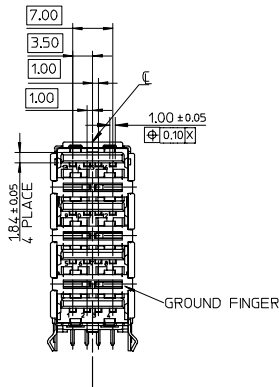

67857-0009	LEAD FREE
Molex P/N	NOTE
Rev. D 2004/06/28	


LEAD FREE EC NO: SH2006-01-02424 DRW: WFK001 CHKD: CHIKD APPR: WFSCHANG 2006/02/22 2006/02/22 2006/03/10	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± 0.25</td> <td>± 0.010</td> </tr> <tr> <td>3 PLACES</td> <td>± 0.25</td> <td>± 0.010</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.25</td> <td>± 0.010</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.25</td> <td>± 0.010</td> </tr> <tr> <td colspan="3">ANGULAR ± 3°</td> </tr> </table>		mm	INCH	4 PLACES	± 0.25	± 0.010	3 PLACES	± 0.25	± 0.010	2 PLACES	± 0.25	± 0.010	1 PLACE	± 0.25	± 0.010	ANGULAR ± 3°			DIMENSION STYLE MM ONLY	SCALE 1.5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm	INCH																					
4 PLACES	± 0.25	± 0.010																						
3 PLACES	± 0.25	± 0.010																						
2 PLACES	± 0.25	± 0.010																						
1 PLACE	± 0.25	± 0.010																						
ANGULAR ± 3°																								
DRAWN BY DEQUANZHOU 2006/02/22	CHECKED BY ERIC KAO 2006/02/22	APPROVED BY WILSON 2006/02/22	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-67857-004	TITLE USB 4 STACKS (LEAD-FREE VERSION)	SHEET NO. 1 OF 2																		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

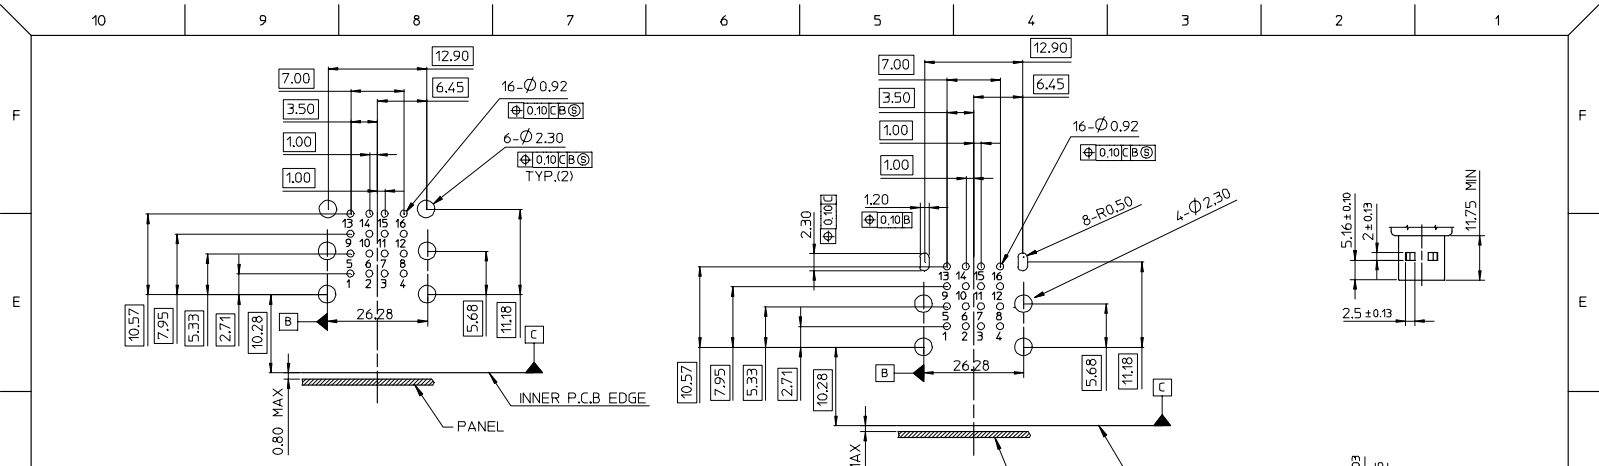


RECOMMENDED P.C.B. LAYOUT (1) (THICKNESS=1.6MM)  
(GENERAL TOLERANCE: ±0.05MM)

RECOMMENDED P.C.B. LAYOUT (2) (THICKNESS=1.6MM)  
(GENERAL TOLERANCE: ±0.05MM)

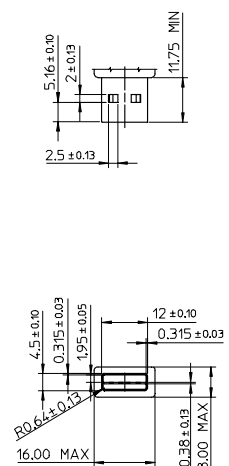

USB CABLE DRAWING



DETAIL A  
SCALE 2:1

LEAD FREE EC NO: SH2006-0424 DRW: KEA001 CHKD: CHIKO APPR: WSC HANG 2006/02/27 2006/02/27 2006/03/10	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- + --- 3 PLACES ± --- + --- 2 PLACES ± 0.25 + --- 1 PLACE ± 0.25 + --- ANGULAR ± 3°	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION USB 4 STACKS (LEAD-FREE VERSION) MOLEX INCORPORATED
	DESCRIPTION		MM ONLY	1:1	METRIC	
	REV		DRAWN BY	DATE	TITLE	
			CHECKED BY	DATE		
	APPROVED BY	DATE				
			MATERIAL NO.	DOCUMENT NO.		SHEET NO.
			SEE TABLE	SD-67857-004		2 OF 2
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			