
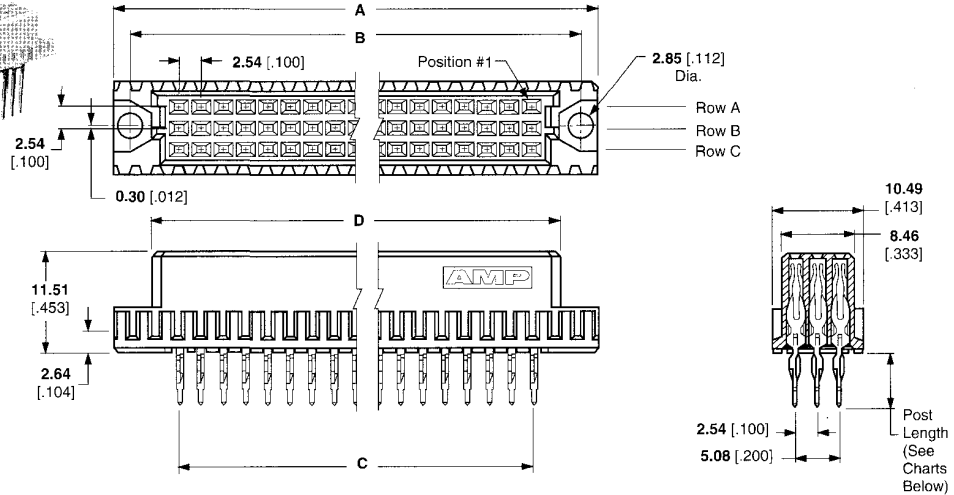


Type C Vertical Receptacle Assemblies with ACTION PIN Posts for PC Board Mount (0.64 [.025] Square)

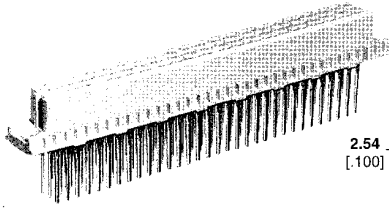

Material

Housing — Glass filled polymer

Contacts — Copper alloy

Related Product Data

DIN Performance Levels — Page 6

Performance Specifications — Page 7

Mateable Connectors — Pages 17, 19, 28, 52-54

PC Board Hole Layout — Page 58

Accessories — Pages 63, 64, 68, 69

ACTION PIN Contacts — Pages 70, 71

Application Tooling — Pages 72, 73

Technical Documents — Page 74:

DIN Specification 41612

IEC Specification 60603-2

Application Specification 114-9014

Instruction Sheets 408-6927, 408-9623

Standard Size (For PC Board Thicknesses of 2.36 [.093] and Above)

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number
		A	B	C	D			
96	A,B,C	95.00	90.00	78.74	85.00	13.00	II	215912-4 ³
		3.740	3.543	3.100	3.346	.512		1-215912-4 ¹
64	A,C	95.00	90.00	78.74	85.00	17.00	II	215614-4 ³
		3.740	3.543	3.100	3.346	.669		1-215614-4 ¹
64	A,C	95.00	90.00	78.74	85.00	13.00	II	215913-4 ³
		3.740	3.543	3.100	3.346	.512		1-215913-4 ¹
64	A,C	95.00	90.00	78.74	85.00	17.00	II	215781-4 ³
		3.740	3.543	3.100	3.346	.669		1-215781-4 ¹

Standard Size (For PC Board Thicknesses of 1.57 [.062] and Above)

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number
		A	B	C	D			
96	A,B,C	95.00	90.00	78.74	85.00	13.00	II	215950-4 ³
		3.740	3.543	3.100	3.346	.512		1-215950-4 ¹
96	A,B,C	95.00	90.00	78.74	85.00	14.80	II	148057-5 ^{2,3}
		3.740	3.543	3.100	3.346	.512		1-148057-5 ^{1,2}
64	A,C	95.00	90.00	78.74	85.00	17.00	II	148059-5 ³
		3.740	3.543	3.100	3.346	.669		1-148059-5 ^{1,2}
64	A,C	95.00	90.00	78.74	85.00	13.00	II	1-148167-5 ^{1,2}
		3.740	3.543	3.100	3.346	.512		

Half Size

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number
		A	B	C	D			
48	A,B,C	53.34	49.37	38.10	44.35	3.70	II	4-1393637-42.3
		2.100	1.944	1.500	1.746	.146		

Third Size

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number
		A	B	C	D			
30	A,B,C	39.76	34.76	22.86	29.12	3.70	II	4-1393637-02.3
		1.565	1.368	.900	1.146	.146		
20	A,C	39.76	34.76	22.86	29.12	3.70	II	4-1393637-22.3
		1.565	1.368	.900	1.146	.146		

¹ Precious metal plating in contact area and 5.08 [.200] from tip of post.

² Toolless (flat rock) connectors.

³ Precious metal plating in contact area, tin lead on tails.

Note: Seating tool required, unless specified otherwise.

Type C Assemblies