

Size 22 Posted Contacts


Material and Finish

Pin and Socket Body — Leaded nickel copper or beryllium copper


Socket Hood — See chart below



Pin and Socket Insertion/Extraction Tool



Pin
(See drawing No. 207683 for latest configurations)



Socket
(See drawing No. 207684 for latest configurations)

AMP Part Number 91067-1 or MIL Part Number M81969/1-04


Insertion tip, for replacement Part Number 126237-1

Extraction tip, for replacement Part Number 126195-2

Notes:

1. Contacts on this page can be used with connectors on pages 5130-5134, 5140. See page 5145 for PCB layouts.
2. Mating End of pin and socket complies with MIL-C-39029.

Post Diameter ± .002 [± .050]	Post Extension C ± .025 [± 0.63]	Part Nos.		Contact Plating	Socket Hood Material and Finish	
		Pin	Socket			
.018 0.46	.175 4.45	207683-6	207684-3	Pin .000050-.000100 [0.00127-0.00254] thick gold plate over .000100-.000150 [0.00254-0.00381] thick copper underplate	Socket .000050-.000100 [0.00127-0.00254] thick gold plate over .000100-.000250 [0.00254-0.00635] thick copper underplate	Brass or Beryllium copper with .000050-.000100 [0.00127-0.00254] thick gold plate over .000100-.000250 [0.00254-0.00635] thick copper underplate
	.275 6.99	207683-2	207684-1			
	.525 13.34	207683-4	207684-2			
.025 0.64	.275 6.99	207683-8	207684-4	.000050-.000100 [0.00127-0.00254] thick gold plate over .000050-.000150 [0.00127-0.00381] thick nickel underplate		Passivated Stainless Steel
	.275 6.99	—	207684-5	.000050-.000100 [0.00127-0.00254] thick gold plate over		Passivated Stainless Steel
.018 0.46	.525 13.34	207683-9	—	.000050-.000150 [0.00127-0.00381] thick nickel underplate		
	.175 4.45	1-207683-1	—	.000050-.000100 [0.00127-0.00254] thick gold plate over .000200-.000250 [0.00508-0.00635] thick nickel underplate		

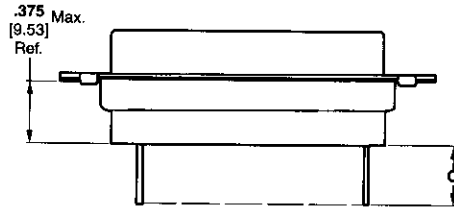

Post extension when used in a standard connector

Pin and Socket Connectors