This is issued in strict confidence on condition that it is not used as a basis for manufacture or sale, and that it is not copied, reprinted or disclosed to a third party either wholly or in part without prior written consent of ITT Cannon.

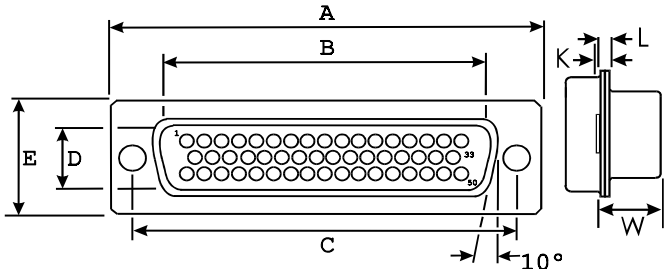

A ± 0,38 (.015)	B ± 0,13 (.005)	C ± 0,13 (.005)	D ± 0,13 (.005)	E ± 0,38 (.015)	L ± 0,25 (.010)	W ± 0,41 (.016)	K ± 0,25 (.010)
66,93 (2.635)	52,81 (2.079)	61,11 (2.406)	11,07 (.436)	15,37 (.605)	0,99 (.039)	6,84 (.269)	1,52 (.060)

No mounting hardware selected

with 3,05 (.120) mounting hole



50 crimp signal contacts, part number 330-5291-097 kitted with each connector

DESCRIPTION	MATERIAL	FINISH
Insulator	DAP 2 Piece	None, (Color White), Copper alloy retention clips
Shells	Steel	Yellow Chromate over Zinc
Signal Contacts	Copper alloy	50 microinches Gold over Nickel

Unless otherwise specified, dimensions are in mm & (in.)

Tolerances are (.XXX = mm)

Decimals		Angles
.X	± 0,20 (.008)	X° ± 1.0°
.XX	± 0,10 (.004)	
.XXX	± 0,05 (.002)	

Issue Date: 25-Aug-99

Cannon | ITT Industries

CONNECTOR, PLUG, ELECTRICAL
D-SUBMINIATURE 50 POSITION CRIMP

PART NO. **DDMAM50P**

Downloaded from Elcodis.com electronic components distributor