

1 | 2

3 |

4



- NOTES :
- MATERIAL
 - HOUSING : HIGH TEMPERATURE THERMOPLASTIC UL94V-0
 - TERMINAL : COPPER ALLOY
 - HOLD DOWN : COPPER ALLOY
 - FINISH
 - TERMINAL : Au PLATING AT CONTACT POINT
 - TERMINAL : MATT TIN PLATING AT CONTACT POINT
 - TERMINAL : MATT TIN PLATING AT CONTACT POINT
 - TERMINAL : MATT TIN PLATING AT CONTACT POINT
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFREARED, OR VAPOR PHASE REFLOW OVEN.
 - Packaging spec. GS-14-840.
 - Product Spec. GS-12-194.

10096851-0 X X X LEAD FREE

PRODUCT SPEC: BLANK - SEE NOTE 5

- G/F PLATING AT CONTACT
- 15U" GOLD AT CONTACT
- 30U" GOLD AT CONTACT

0: T & R PACKING WITHOUT PICK UP CAP

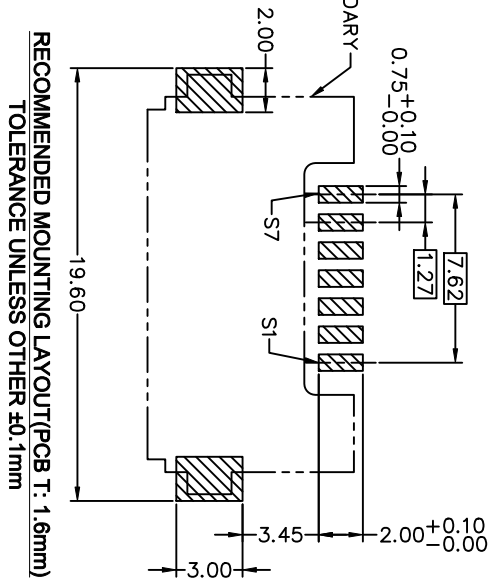

1 | 2

AC.A11

3 |

4

mat'l code		tolerances unless otherwise specified		CUSTOMER COPY		FCI		www.fciconnect.com	
ltr	ecn no	dr	ddte	.X ± 0.38	projection	MM	product family	SATA	code
A	T09-1051	S.LIN	04/10/09'	.XX ± 0.25	STERLING LIN	04/10/09'	size	dwg no	TWN
				.XXX ± 0.10	engr	GARY HSIEH	scale	10096851	sheet
				0° ± 2°	chr	JOSEPH HSA	NA		2 of
sheet	revision		A		appr				
index	sheet		1						
			2						
code		code		code		code		code	