

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0716617230](#)
Status: **Active**
Overview: [ebbi_50d](#)
Description: 1.27mm (.050") Pitch EBBI™ 50D Plug, Vertical, Blind Mate, 30 Circuits, 3.40mm (.134") PC Tail Length

Documents:

3D Model	Product Specification PS-71660 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	71661
Application	Board-to-Board, Signal, Wire-to-Board
Overview	ebbi_50d
Product Name	EBBI™

Physical

Breakaway	No
Circuits (Loaded)	30
Circuits (maximum)	30
Color - Resin	Black
Durability (mating cycles max)	2,000
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.40mm (.134")
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm (.063")
Packaging Type	Tray
Pitch - Mating Interface	1.27mm (.050")
Pitch - Termination Interface	1.27mm (.050")
Plating min - Mating	0.762µm (30µ")
Plating min - Termination	1.905µm (75µ")
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole

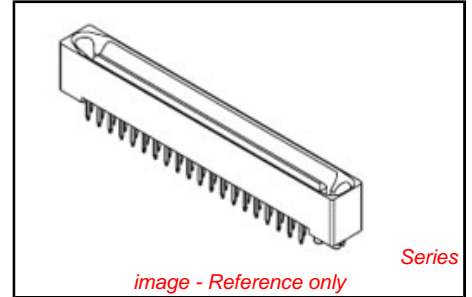

<p>EU RoHS ELV and RoHS Compliant REACH SVHC Not Reviewed Low-Halogen Status Not Reviewed</p>	<p>China RoHS</p>
--	--------------------------

Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[71661Series](#)

Mates With
[EBBI™ 50D Receptacle 71660](#)

Electrical

Current - Maximum per Contact 1A
Voltage - Maximum 30V

Solder Process Data

Duration at Max. Process Temperature (seconds) 40
Lead-free Process Capability SMC & Wave Capable (TH only)
Max. Cycles at Max. Process Temperature 3
Process Temperature max. C 260

Material Info

Country of Origin US

Reference - Drawing Numbers

Packaging Specification PK-71660
Product Specification PS-71660
Sales Drawing SDA-71661-7***

This document was generated on 11/11/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION