

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0755860006](#)
Status: **Active**
Overview: ipass
Description: 0.80mm (.031") Pitch, iPass™ I/O SMT Receptacle, Right Angle, External Application, 50 Circuit, 0.76µm (30µ") Gold (Au)

Documents:

[3D Model](#) [Product Specification PS-75586-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980

General

Product Family I/O Connectors
 Series 75586
 Application Wire-to-Board
 Component Type Receptacle
 Overview ipass
 Product Name iPass™, PCI Express*, SAS
 Type N/A

Physical

Boot Color N/A
 Circuits (Loaded) 50
 Circuits (maximum) 50
 Color - Resin Black
 Durability (mating cycles max) 250
 Flammability 94V-0
 Gender Female
 Keying to Mating Part None
 Lock to Mating Part None
 Material - Metal High Performance Alloy (HPA)
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Number of Rows 2
 Orientation Right Angle
 PCB Locator Yes
 PCB Retention None
 PCB Thickness - Recommended 1.35mm (.053")
 Packaging Type Embossed Tape on Reel
 Panel Mount No
 Pitch - Mating Interface 0.80mm (.031")
 Pitch - Termination Interface 0.80mm (.031")
 Plating min - Mating 0.762µm (30µ")
 Plating min - Termination 2.540µm (100µ")
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Ports 1
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating -40°C to +80°C
 Termination Interface: Style Surface Mount
 Waterproof / Dustproof No
 Wire Insulation Diameter N/A
 Wire Size AWG N/A

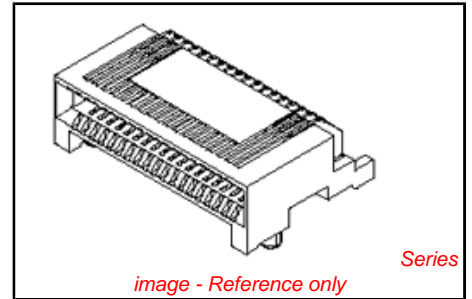

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

75586Series

Mates With

74547 iPass™ Cable Assembly

Use With

74548 I/O Connectors

Electrical

Current - Maximum per Contact	0.5A
Grounding to Panel	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Lead-free Process Capability	Reflow Capable (SMT only)
Process Temperature max. C	260

Material Info

Old Part Number	75886-0006
-----------------	------------

Reference - Drawing Numbers

Application Specification	AS-75586-001
Product Specification	PS-75586-001
Sales Drawing	SD-75586-001

This document was generated on 01/25/2011

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION