

### **MAG45 Modular Jacks with Integrated Magnetics**

### **Product Features**

- PCB space savings
- Improved reliability and EMI performance over discrete magnetics
- Micro-welding of mag wire to PCB versus soldering
- Meets or exceeds FCC Part 68, IEEE 802.3, and ANSI X3.263 requirements
- Supports all appropriate and available PHY Chips and applications
- Extended Temp -40C to +85C available

### **Product Qualification**

- 501 and 108 Qualification Test and Product Specification Reports available
- UL/CSA Recognized component
- For assistance in part selection, please refer to the Tyco Electronics E-Catalog
- Your Tyco Electronics Sales Representative or one of the Product Information Centers listed below are also available to assist



The MAG45 product line offers a broad range of available RJ45 modular jacks with integrated magnetics for 10/100 Base-T, Gigabit and PoE Enabled applications. Multiple configurations are available to include single port, tab up or tab down; single port USB/RJ45; single port low profile; ganged multiport, 1xN; and stacked multiport,

2xN. All available with or without LEDs. There are multiple LED combinations and color options available.

Available soon RJ45 with Integrated Magnetics/ PoE controller and MRJ21 product.

Available in Spring 2005 Pb Free/RoHS Compliant MAG45 product.

# MAG45 Modular Jacks with Integrated Magnetics


### MAG45 Modular Jacks with Integrated Magnetics (Continued)

Single Port 10/100 Base-T, Gigabit & PoE, Tab Down

### **Product Facts**

- **■** Single Port
- Through Hole, Tab Down
- Available with or without LEDs
- **■** UL Recognized
- IEEE 802.3 & ANSI X3.263 Compliant
- Numerous circuit options available
- Supports all appropriate and available PHY Chips and applications
- For assistance in part selection, please refer to the Tyco Electronics E-Catalog
- Your Tyco Electronics Sales Representative or one of the Product Information Centers listed below are also available to assist





**PCB Footprint** 

### Single Port Tab Down\*

10/100 Base-T	10/100 PoE	Gigabit	Gigabit PoE
✓	✓	✓	No


\*multiple LED colors with and without resistors available.

10/100 Base-T	10/100 PoE	Gigabit
6605424-1	6605432-2	1-6605444-1
6-6605425-1	1-6605310-1	6605434-1
5-6605308-1	6-6605440-1	6605445-6

### Single Port 10/100 Base-T, Gigabit & PoE, Tab Up

- **■** Single Port
- Through Hole, Tab Up
- Available with or without LEDs
- UL Recognized Component
- IEEE 802.3 & ANSI X3.263 Compliant
- Numerous circuit options available
- Supports all appropriate and available PHY Chips and applications
- For assistance in part selection, please refer to the Tyco Electronics E-Catalog
- Your Tyco Electronics Sales Representative or one of the Product Information Centers listed below are also available to assist





### Single Port Tab Up\*

10/100 Base-T	10/100 PoE	Gigabit	Gigabit PoE
✓	✓	✓	**

\*multiple LED colors with and without resistors available.

\*\*under development.


10/100 Base-T	10/100 PoE	Gigabit
6605759-1	1-6605832-1	5-6605809-1
5-6605763-6	6605818-1	6605814-5
5-6605758-9	1-6605834-1	6605852-2

## **Electronics**

### MAG45 Modular Jacks with Integrated Magnetics (Continued)

Single Port Low Profile 10/100 Base-T & Gigabit, Tab Up

- Height is .445" vs std .580"
- UL Recognized
- IEEE 802.3 & ANSI X3.263 Compliant
- **■** With LEDs
- Supports all appropriate and available PHY Chips and applications
- For assistance in part selection, please refer to the Tyco Electronics E-Catalog
- Your Tyco Electronics Sales Representative or one of the **Product Information Centers** listed below are also available to assist

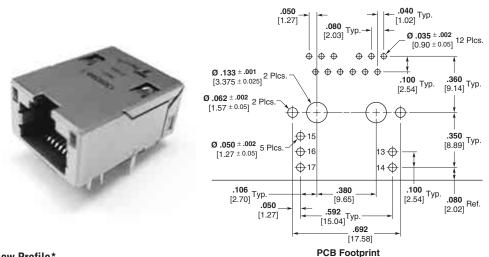

Low Profile\*

10/100 PoE 10/100 Base-T Gigabit Gigabit PoE No


\*multiple LED colors with and without resistors available.

	10/100 Base-T	Gigabit
Tab Up	1368458-1	1368398-1
Tab Down	1368590-1	1368589-1

### Ganged 10/100 Base-T, Gigabit & PoE, Tab Up

- Multi-Port Single Layer Connector
- Through Hole, Tab Up
- Available with or without
- **■** UL Recognized Component
- IEEE 802.3 & ANSI X3.263 Compliant
- Numerous circuit options available
- Supports all appropriate and available PHY Chips and applications
- For assistance in part selection, please refer to the Tyco Electronics E-Catalog
- Your Tyco Electronics Sales Representative or one of the **Product Information Centers** listed below are also available to assist





Ganged Multi-Port Tab Up (unless noted)\*

**PCB** Footprint

•	,			
Port Configuration	10/100 Base-T	10/100 PoE	Gigabit	Gigabit PoE
1x2	✓	✓	✓	**
1x4	<b>√</b>	<b>√</b>	✓	✓
1x5	✓	✓	✓	**
1x6	✓	✓	✓	✓
1x8	/		<u> </u>	**

\*multiple LED colors with and without resistors available.

\*\* Under development.

Don't Confirmation	40/400 Dana T	40/400 D-F	Oi bit	Oimabit Da E
Port Configuration	10/100 Base-T	10/100 PoE	Gigabit	Gigabit PoE
1x2	5-6610000-1	1-6610128-1	1-6610209-1	No***
1x2 Tab Down	No***	No	1840516-6	No
1x4	5-6610049-1	1840500-1	6610068-6	1840514-1
1x4 Tab Down	6610211-1	No	6610204-1	No
1x4 Tab Down Low Profile	No***	No	1840515-1	No
1x4 Tab Up Low Profile	No***	No	1761889-1	No
1x5	6610078-2	6610182-2	1-6610132-1	No
1x6	1-6610084-1	5-6610168-8	6610157-1	6610199-1
1x8	6610112-1	1-6610122-1	6610160-6	No***

Note: All part numbers are RoHS compliant.

26

Catalog 82066 Revised 11-07

Dimensions are in inches and millimeters unless otherwise specified. Values in brackets are metric equivalents

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752 Canada: 1-905-470-4425 Mexico: 01-800-733-8926 C. America: 52-55-1106-0803

South America: 55-11-2103-6000 Hong Kong: 852-2735-1628 Japan: 81-44-844-8013 UK: 44-8706-080-208


<sup>\*\*\*</sup> Contact product management about possibility of adding.



### Stacked USB/RJ45 (10/100 Base-T or Gigabit)

- USB/RJ45 with integrated magnetics
- 10/100 or Gigabit applications
- Stacked USB type A included
- **■** UL Recognized
- Available with LEDs
- IEEE 802.3 & ANSI X3.263 Compliant
- USB 2.0 Compliant
- Numerous circuit options available
- Supports all appropriate and available PHY Chips and applications
- For assistance in part selection, please refer to the Tyco Electronics E-Catalog
- Your Tyco Electronics Sales Representative or one of the Product Information Centers listed below are also available to assist



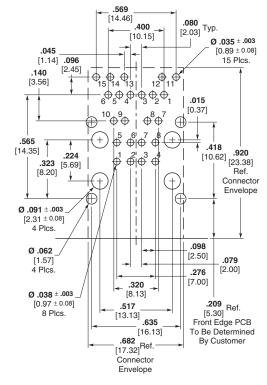

PCB Footprint

### USB/RJ45\*

10/100 Base-T	10/100 PoE	Gigabit	Gigabit PoE
✓	No	✓	No

<sup>\*</sup>multiple LED colors with and without resistors available.


Port Configuration	10/100 Base-T	Gigabit
RJ45/Dual USB	6620004-1	6368472-1
	6620002-1	6620005-1
	6368532-1	6620009-1
RJ45/Single USB	No**	1840012-1


<sup>\*\*</sup> Contact product management about possibility of adding.



### Stacked (10/100 Base-T)

- **Stacked Connector**
- **■** UL Recognized
- **■** Without LEDs
- IEEE 802.3 & ANSI X3.263 Compliant
- Numerous circuit options available
- Supports all appropriate and available PHY Chips and applications
- For assistance in part selection, please refer to the Tyco Electronics E-Catalog
- Your Tyco Electronics Sales Representative or one of the Product Information Centers listed below are also available to assist

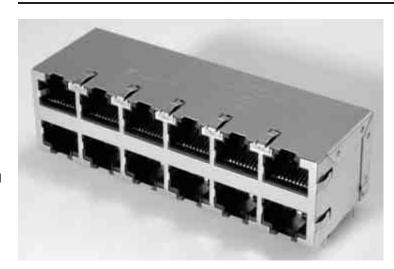

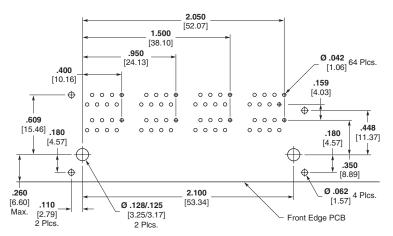

**PCB** Footprint

### Stacked

Port Configuration	10/100 Base-T	10/100 PoE
2x1	✓	✓
2x3	✓	✓
2x4	✓	✓
2x6	✓	<b>√</b>
2x8	✓	✓


Port Configuration	10/100 Base-T
2x4	6615012-1
2x6	6368525-1
2x8	6368526-1

### **Electronics**

### MAG45 Modular Jacks with Integrated Magnetics (Continued)

### **Stacked** (10/100 Base-T, Gigabit & PoE)

- Stacked, Through Hole, Vertical 10-Pin Footprint
- Available with or without **LEDs**
- **■** UL Recognized
- IEEE 802.3 & ANSI X3.263 Compliant
- Numerous circuit options available
- Supports all appropriate and available PHY Chips and applications
- For assistance in part selection, please refer to the Tyco Electronics E-Catalog
- Your Tyco Electronics Sales Representative or one of the **Product Information Centers** listed below are also available to assist

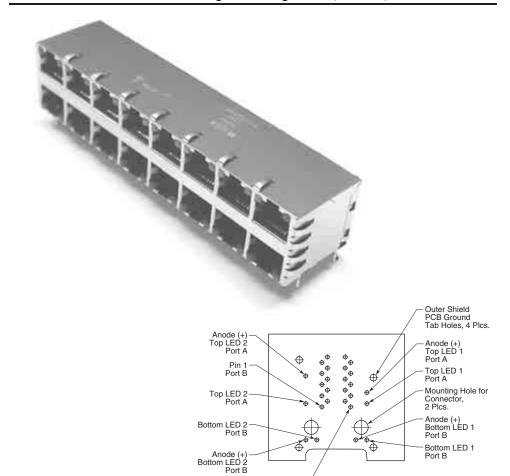

#### **PCB** Footprint

Pin 1 Port A

### Stacked\*

Port Configuration	10/100 Base-T	10/100 PoE	Gigabit	Gigabit PoE
2x1	✓	✓	✓	✓
2x2	✓	✓	✓	✓
2x3	✓	✓	✓	✓
2x4	✓	<b>√</b>	✓	✓
2x6	✓	✓	✓	✓
2x7	_	_	✓	_
2x8	<b>✓</b>	<b>√</b>	/	<b>√</b>

<sup>\*</sup>multiple LED colors with and without resistors available.

Port Configuration	10/100 Base-T	10/100 PoE	Gigabit	Gigabit PoE
With LED's				
2x1	6368457-1	No**	6368513-1	No**
2x2	6368387-1	No**	6368511-1	No**
2x4	6368400-1	No**	6368507-1	No**
2x6	1840115-1	6615076-1	6368506-1	No**
2x8	6368536-1	No**	6368510-1	No**
Without LED's				
2x1	1840124-1	No**	1840003-1	No**
2x2	No**	No**	6368523-1	No**
2x4	No**	6615072-1	1840155-1	No**
2x6	No**	6615070-1	1840186-1	1840141-1
2x7	No**	No**	1840187-1	No**
2x8	No**	No**	1840188-1	1840142-1

Note: All part numbers are RoHS compliant.

Catalog 82066 Revised 11-07

Dimensions are in inches and millimeters unless otherwise specified. Values in brackets are metric equivalents.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752 Canada: 1-905-470-4425 Mexico: 01-800-733-8926 C. America: 52-55-1106-0803

South America: 55-11-2103-6000 Hong Kong: 852-2735-1628 Japan: 81-44-844-8013 UK: 44-8706-080-208

<sup>\*\*</sup> Contact product management about possibility of adding.



### MAG45 with PoE Controller RJ45 + PoE Magnetics + Silicon Power Controller

### **PoE Product Features**

- Integrated Silicon PoE 12-port controller
  - 802.3af compliant
  - **Auto and Enhanced mode** capable
- **■** Footprint
  - Press-fit configuration
  - Ease of routing on customer PCB
- Pin Assignments
  - Signal integrity benefits vs. standard footprint
- Three options in same footprint:
  - Integrated Magnetics Only
  - Integrated Magnetics, **Enabled PoE**
  - Integrated Magnetics, **Integrated PoE**
- 2250Vdc / 1500Vac electrical isolation per 802.3 requirements

### **Customer Benefits:**

- Simplify implementation of full PoE solution
- Board real estate savings
- Reduce board layout issues
- Integrate new and existing technologies into a single connector unit

### Why Integrate the PoE Circuitry into the RJ?

- Single package (PoE, LED's, Magnetics, Heat Sink)
- Identical footprint for both Integrated PoE/Enabled and non-PoE
- Single design, single motherboard can be used for both PoE and non-PoE
- Same design can migrate between switches (including blades and fixed)
- Delivered fully tested and qualified, no need to bother with complicated PoE testing



- Reduced layer count/ Reduces cost of motherboard
- No PoE daughterboards
- Isolated PoE voltage provided directly from the power supply
- All per port components embedded in RJ
- Eliminates issues of voltage isolation on motherboard
- Reduces EMI risks

### **PoE Controller Features**

- Power supplied over data contacts 1 & 2 and 3 & 6
- I2C Capability
- PoE chip provides power and command/control circuitry from motherboard power plane/bus
- Provides isolation between earth/building and signal ground

- Real time control of overload, underload, short circuits and under voltage states
- 0.5A current carrying capacity
- Full AC disconnect and classification
- 80V tolerant, surge protected system
- Registers for MIB 8 support and parameters adjustment
- Single voltage feeding (44 - 57VDC)
- Designed to support legacy capacitor detection

### How Does PoE RJ45 Work?


- Embedded inside each **RJ45** is the Silicon Power PD64012 chip
- Each RJ45 is a 12 port PoE system, communicating

- with each other to create a system of up to 48 ports
- The Host CPU controls the system via I2C
- Two main operating modes: Automatic/Enhanced Mode to match system customization requirements


For assistance in part selection, please refer to the Tyco Electronics E-Catalog.

Your Tyco Electronics Sales Representative or one of the **Product Information Centers** listed below are also available to assist.

### Legacy vs. Press Fit PoE Footprint



Legacy Footprint Solder Only



Integrated/Enabled/Non PoE Footprint Press Fit

Catalog 82066 Revised 11-07

Dimensions are in inches and millimeters unless otherwise specified. Values in brackets are metric equivalents

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752 Canada: 1-905-470-4425 Mexico: 01-800-733-8926 C. America: 52-55-1106-0803

South America: 55-11-2103-6000 Hong Kong: 852-2735-1628 Japan: 81-44-844-8013 UK: 44-8706-080-208



### **Part Number Matrix**

Base Part Number	Integrated Magnetics	Power over Ethernet	PCB Attach Options	LED Options (2 per Port)	Description
1658821	10/100/1000	Integrated	Press Fit	With/Without Yellow/Green	PowerDsine Integrated Chip Set, 802.3af Compliant
1658822	10/100	Integrated	Press Fit	With/Without Yellow/Green	PowerDsine Integrated Chip Set, 802.3af Compliant
1658825	10/100/1000	Enabled	Press Fit	With/Without Yellow/Green	PoE Chip set on Motherboard, 802.3af Compliant
1658826	10/100	Enabled	Press Fit	With/Without Yellow/Green	PoE Chip set on Motherboard, 802.3af Compliant
1658827	10/100/1000	No	Press Fit	With/Without Yellow/Green	
1658828	10/100	No	Press Fit	With/Without Yellow/Green	


Same Mechanical Footprint, all versions.

Same Electrical Footprint, pins 25 – 170, all versions.




Pins 1 – 24 PoE Control Circuitry

Port Data Pairs and LEDs



Part Number 1658821 - 1658822



Part Number 1658825 - 1658828