



SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	G±0.25
09	30.81	24.99	16.96	16.79	10.96	5.90
15	39.14	33.32	25.18	25.12	19.18	5.90
25	53.03	47.04	39.12	38.84	33.12	5.70
37	69.32	63.50	55.68	55.30	49.68	5.70

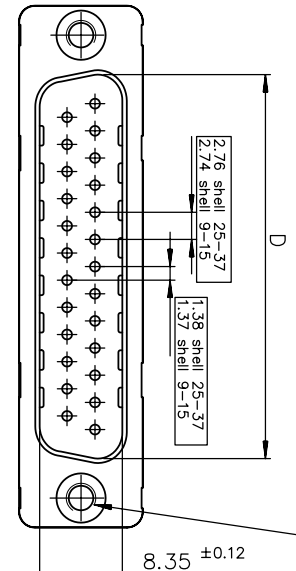

Threaded UNC 4.40 SELLERS

PC cord drilling dimensions(after plating)
(thickness 1.60±0.20mm)

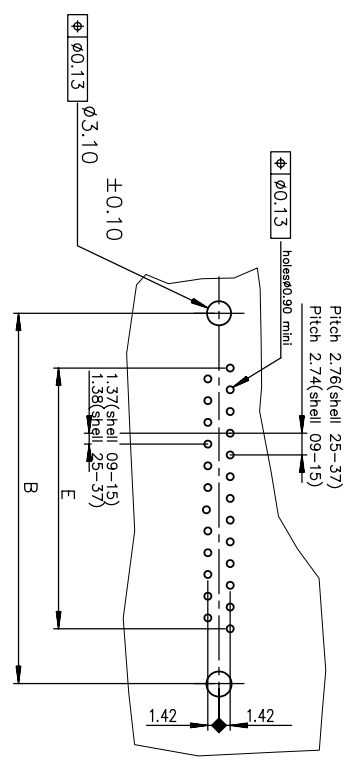

4 = Performance level PL3 ≥ 200 OPERATIONS
6 = Performance level PL1 ≥ 500 OPERATIONS

SHELL	LEAD FREE PART NUMBER	TIN LEAD PART NUMBER	DESIGNATIONS
09	D09P24A*G100LF	D09P24A*G100	HEADER 9 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN
15	D15P24A*G100LF	D15P24A*G100	HEADER 15 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN
25	D25P24A*G100LF	D25P24A*G100	HEADER 25 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN
37	D37P24A*G100LF	D37P24A*G100	HEADER 37 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN

4 = Performance level PL3 ≥ 200 OPERATIONS
6 = Performance level PL1 ≥ 500 OPERATIONS

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

rev	ech no	dr	date	Dr	Eng	Chr	Appr	Product family	ISO 1302	ISO 406	ISO 1101	projection	Scale	Rev.
A	-	BAR	2003/04/16	JARRY	1995/08/11	ANGULAR								
B	LS05-001	MPE	2005/03/14	PESSON	1995/08/11	LINEAR			0.XX	±0.1	±0.1	A3	2	
C	LS05-006	LGO	2005/07/07	NIRRAL GEORGE	2010-02-23	0.XX #2			0.XXX	±0.1	±0.1			
D	LS06-0097	LGO	2006/07/28	SUDHIR VARMA	2010-02-23									
E	009-0268	NG	2009-11-24											
F	110-0059	NG	2010-02-23											

www.fciconnect.com

FCI logo

HEADER DELTA D STD EUROPE

HEADER DELTA D STD EUROPE

C01-8646-0816

CUSTOMER sheet 1 of 1

European Views

mm

Scale 2

Rev. F

REV F - 2008-04-17

1 2 3 4