

## P2/P5 Type B Vertical Male Feed-To

### Materials and Finish


Glass filled polyester housing gray, UL94 V-0 rated  
Phosphor-bronze signal contacts  
Contact area 0.8µm Au over 1.3µm Ni  
ACTION PIN contact 0.5µm Sn/Pb over 1.3 µm Ni

### 5+2 Row Configuration



This configuration accommodates the upper ground return shield feature on the mating female connector by providing contacts in rows z & f in addition to the five rows of signal pins.

- 110 signal contacts
- Length 43.9mm
- Backplane applications




Technical documents see pg 82.

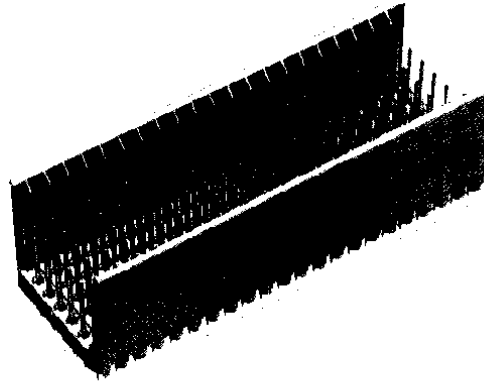

Connector Type	CompactPCI Designation	Number of Signal Contacts	Part Number
B (22)	P2.P5	110	188835-1

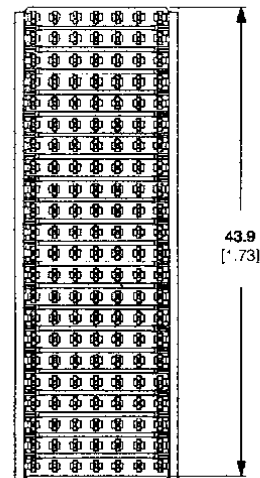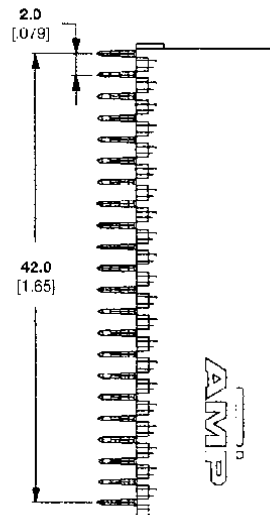

### Contact Layout

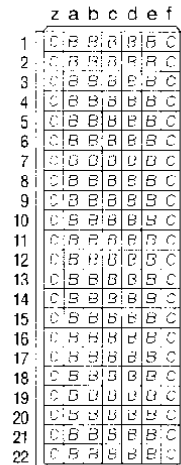

See inside back cover for AMP Worldwide locations and phone numbers.  
Dimensions are in inches and millimeters unless otherwise specified. Values in brackets are U.S. equivalents.  
Specifications subject to change. Consult AMP for latest specifications.