
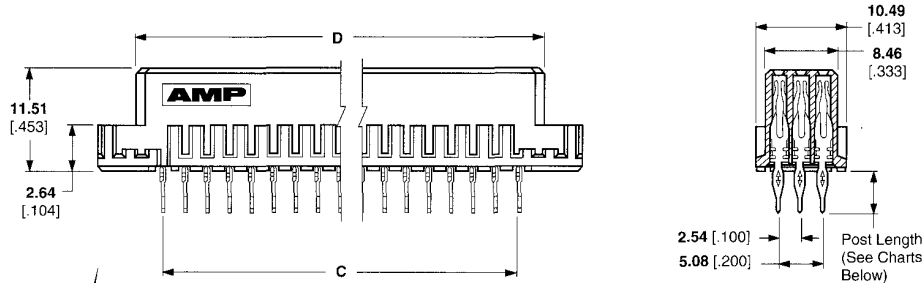
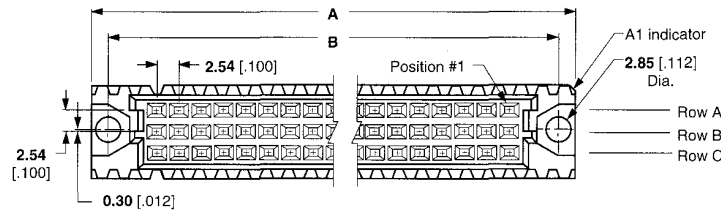


Type C Vertical Receptacle Assemblies with ACTION PIN Posts for PC Board Mount (0.30 x 0.61 [.012 x .024])

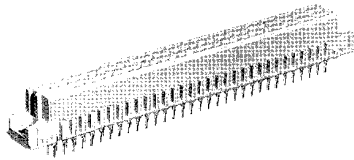

Type C Assemblies

Material

Housing — Glass filled polymer
Contacts — Copper alloy

Related Product Data

- DIN Performance Levels** — Page 6
- Performance Specifications** — Page 7
- Mateable Connectors** — Pages 17, 18, 19, 28, 52-54
- PC Board Hole Layout** — Page 58
- Accessories** — Pages 64, 68, 69
- ACTION PIN Contacts** — Pages 70, 71
- Application Tooling** — Pages 72, 73
- Technical Documents** — Page 74:
DIN Specification 41612
IEC Specification 60603-2
Application Specification 114-9014
Instruction Sheet 408-6927

Standard Size (For PC Board Thicknesses of 1.57 [.062] and Above)

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number	
		A	B	C	D				
96	A,B,C	93.98	90.00	78.74	85.00	3.70	II	4-1393637-6	
		3.700	3.543	3.100	3.346	.146		535032-5	
		6.00	III	3.700	3.543	3.100	3.346	.190	535032-4
									535056-5 ¹
									535032-9
1-1393638-2									
64	A,C	93.98	90.00	78.74	85.00	3.70	I	1393637-9	
		3.700	3.543	3.100	3.346	.146		4-1393637-9	
		4.83	II	3.700	3.543	3.100	3.346	.190	535059-5
									535059-4

Half Size (For PC Board Thicknesses of 1.57 [.062] and Above)

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number
		A	B	C	D			
48	A,B,C	54.34	49.37	38.10	44.35	3.70	II	4-1393637-4
		2.100	1.944	1.500	1.746	.146		535034-5
		4.83	II	2.100	1.944	1.500	1.746	.190
32	A,C	54.34	49.37	38.10	44.35	4.83	II	535068-5
		2.100	1.944	1.500	1.746	.190		

Expanded Size (For PC Board Thicknesses of 1.57 [.062] and Above)

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number
		A	B	C	D			
120	A,B,C	114.30	110.31	99.06	105.31	4.83	II	535079-5
		4.500	4.343	3.900	4.146			
150	A,B,C	139.70	135.71	124.46	130.71	4.83	II	535080-5
		5.500	5.343	4.900	5.146			

¹ Without mounting ears.

Connectors on this page are toolless (flat rock).

When connectors are installed using an SM-3 Machine, a spacer of 26.67 [1.050] is needed to make up height difference.