


LVC45 & LVC55 Series

Single output 45W to 55W AC/DC External Adapters

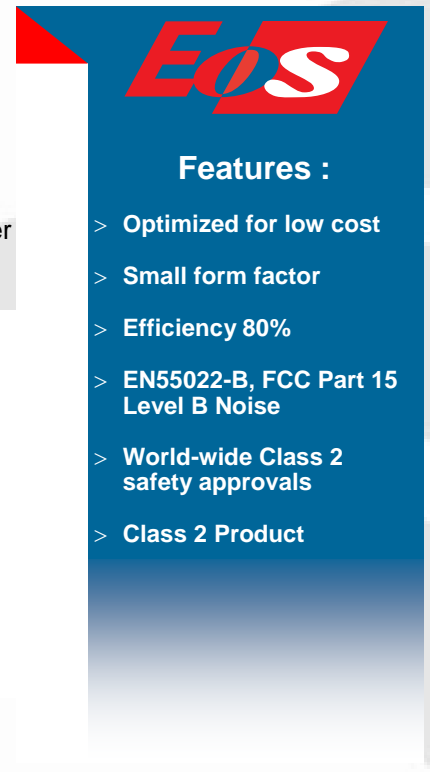

Features :

- > Optimized for low cost
- > Small form factor
- > Efficiency 80%
- > EN55022-B, FCC Part 15 Level B Noise
- > World-wide Class 2 safety approvals
- > Class 2 Product

EOS brand L-Series external adapters are 80% + efficient power supplies from Red Rocket, Inc. Available in popular output voltages from 12 to 24 volts the L-Series offer excellent efficiency ratings and small footprint for applications where competitive advantage appreciated but cost is king.

L-Series adapters use top switch technology making them slightly less efficient than EOS Z-Series adapters yet very competitive where price is key. EOS adapters are among the top's worldwide in total number of units in operation driving leading brands including Dell, Apple, HP, Zebra Technologies, Bally Gaming, Shuffle master, Swarovski and hundreds more...



Model Number	Case Type	Output Voltage	Output Current	Min. Load
LVC45SG12E	SG	12V	3.75A	0A
LVC45SG15E	SG	15V	3.0A	0A
LVC55SG19E	SG	19V	2.9A	0A
LVC55SG24E	SG	24V	2.3A	0A
LVC55SG48E	SG	48V	1.15A	0A

INPUT SPECIFICATIONS		
AC Input	Universal	90 to 264V
Efficiency	Typical	80%
Input Frequency		47-63 Hz
Input Current	Full Load at low line	1.5Arms, max
Inrush Current	High Line , cold start	40A, Max
Leakage Current		<250 µA

OUTPUT SPECIFICATIONS		
Output Power		45 to 55W
Minimum Load		0.0A
Hold-Up Time		>10ms
Set Point Accuracy		<5%
Line Regulation	Low line to high line	± 0.5%
Load Regulation	Min to Full Load	± 5%
Transient Response	10% to full load Voltage Deviation Recovery Time	<5% <5ms
Ripple and Noise		<2.0%
Output Rise Time	10% to 90% Load	<25ms
Turn-on Delay		<1s
OTP		Yes
Overload Protection	Auto Recovery >3s	Yes
Short Circuit Protection	Auto Recovery >3s	Short Term

All Red Rocket, Inc. EOS power supplies have UL, CSA and Nemko safety compliance and medical versions meet UL60601-1 standards. All our products are RoHs compliant. Visit us at www.redrocketpower.com and contact us at: sales@redrocketpower.com or by calling +1 805-409-0909 today. © 2008, Red Rocket, Inc. EOS brand power supplies and patents are owned exclusively by Red Rocket, Inc. All Rights Reserved.

LVC45 & LVC55 Series




Single output 45W to 55W AC/DC External Adapters

MECHANICAL SPECIFICATIONS	
Input Connector	IEC320 C8
Output Connector	Right angle, hollow coax plug 0.10" (2.54mm) inside and 0.216" (5.49mm) outside diameter. Center positive polarity
Size	4.22 x 1.724 x 1.182" (107.2 x 43.8 x 30.0 mm)
Weight	5oz (150 g)

EMC AND SAFETY SPECIFICATIONS	
CE Mark	Complies with the Low Voltage and EMC Directives
EMC-Emissions	EN5022-B, CISPR22-B, FCC Part 15 Class B, EN50082-1
EMC - Susceptibility	EN61000-4-2, -4, -5 Level 3
Agency Approvals	Class 2 SELV: NEMKO, c-UL, UL
Safety Standards	IEC68950, CSA C22.2 No. 60950, EN60950, UL60950 Class 2 SELV
Safety file numbers	NEMKO: P05205056 UL : E1306019

ENVIRONMENTAL SPECIFICATIONS		
Operating Temperature		0 to 40° C
Storage Temperature		-40 to 85° C
Cooling		Convection
Relative humidity	Non condensing	95%, max
MTBF	Bellcore, TR332	> 100,000 hrs

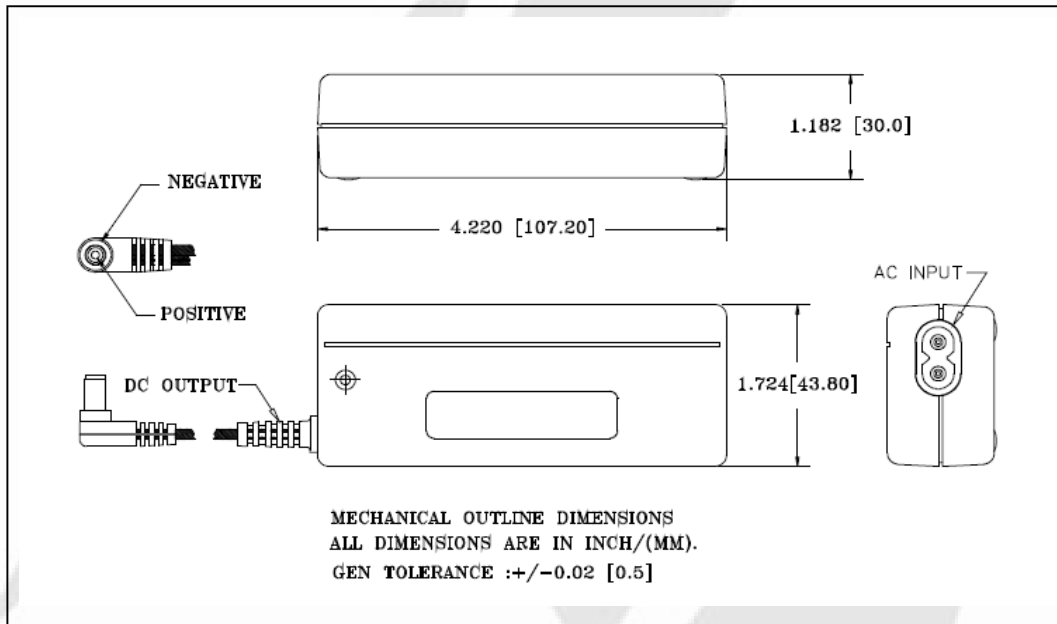

All Red Rocket, Inc. EOS power supplies have UL, CSA and Nemko safety compliance and medical versions meet UL60601-1 standards. All our products are RoHs compliant. Visit us at www.redrocketpower.com and contact us at: sales@redrocketpower.com or by calling +1 805-409-0909 today. © 2008, Red Rocket, Inc. EOS brand power supplies and patents are owned exclusively by Red Rocket, Inc. All Rights Reserved.