
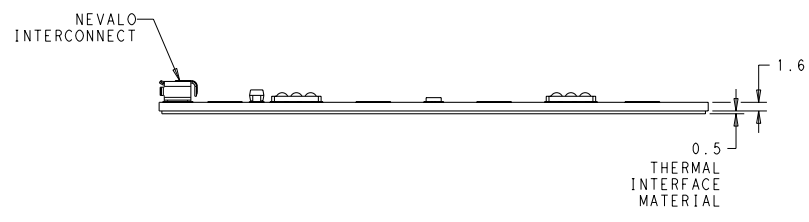



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. COPYRIGHT © BY ALL RIGHTS RESERVED.

REVISIONS				
P	LY#	DESCRIPTION	DATE	BY
2		REVISED BOM/PROD SPEC/APP SPEC	19MAR2011	RB

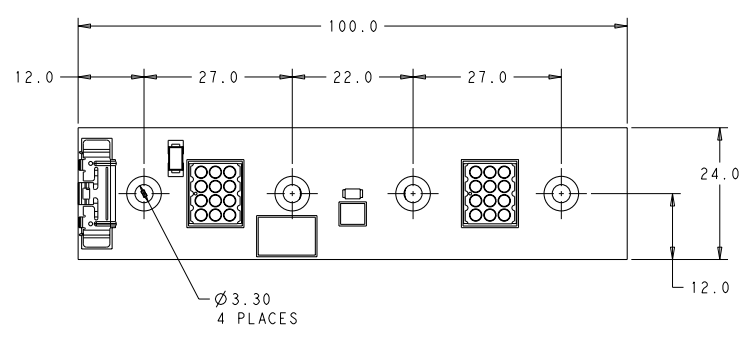

△ MATERIALS AND FINISH:
 -PCB: ALUMINUM
 -INTERCONNECT: COPPER ALLOY FINISH: TIN OVER NICKEL
 -LABELS: POLYESTER
 -THERMAL PAD: SILICONE

- MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
- THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

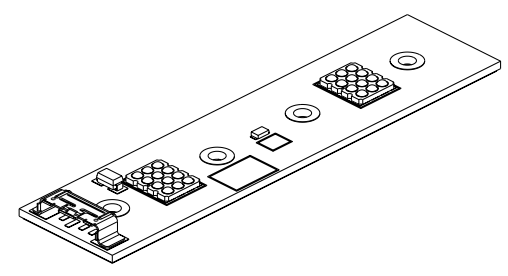

CONFIDENTIAL AND PROPRIETARY
 DESIGN APPROVED
 THIS PRINT IS
PRELIMINARY
 TO FIRST PIECE APPROVAL

540@60°C	350 mA	4000K	INTEMATIX C1109D	1-2154128-1
450@60°C	350 mA	3000K	INTEMATIX C1109D	2154128-1
TYP LUMEN	DRIVE CURRENT	CCT	LED	PART NO.
THIS DRAWING IS A CONTROLLED DOCUMENT. DWG: C. DAILY 08DEC2010 CHK: M. STOLLER 08DEC2010 APP'D: M. STOLLER				
DIMENSIONS: mm		TE Connectivity		
D. PLC #0		PRODUCT SPEC 108-2452		
1. PLC #0.2		APPLICATION SPEC 114-13297		
2. PLC #0.13		SIZE CASE CODE DRAWING NO. A200779 ©-2154128		
3. PLC #0.1		RESTRICTED TO		
4. PLC #0.1		MATERIAL FINISH WEIGHT CUSTOMER DRAWING SCALE 2:1 SHEET 1 OF 1 REV 2		