

NFS110 Medical Series

Single and quad output

Total Power: 80 - 110 W
Input Voltage: 90 - 253 Vac
127 - 357 Vdc
of Outputs: Single, quad

Special Features


- 7.0 x 4.25 x 1.8 inch package
- Medical, dental and laboratory applications
- Overvoltage and short circuit protection
- 110 W with 20 CFM
- UL, VDE and CSA safety approvals
- EN60601-1 and UL2601 medical approvals
- Available RoHS compliant
- 2 year warranty

Safety

VDE0805/EN60601-1/
IEC601/IEC1010
File No. 10401-3336-1049
Licence No. 2874

UL2601 File No. E147937

CSA C22.2 No. 125
File No. LR41062C

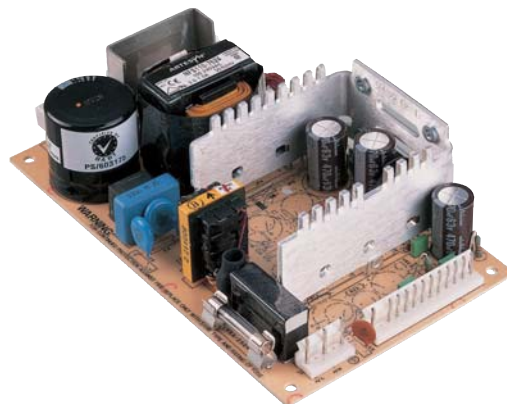

Electrical Specifications

| Output | | |
|-------------------------------|--------------------------|-----------------------------------|
| Voltage adjustability | +5.1 V o/p on multi's | ±3.0% |
| | 5.1 V single output | ±3.0% |
| | 12 V single output | 12-14 V |
| | 15 V single output | 15-18 V |
| | 24 V single output | 24-30 V |
| Line regulation | LL to HL, FL | ±0.1% max. |
| | All outputs on all units | |
| Overshoot/undershoot | At turn-on no lead | 0% |
| Temperature coefficient | All outputs | ±0.02%/°C |
| Overvoltage protection | Multi o/p 5.1 V only | 6.25 V ±0.75 V |
| | 5.1 V single | 6.25 V ±0.75 V |
| | 12 V single | 15.75 V ±1.0 V |
| | 15 V single | 22 V ±1.5 V |
| | 24 V single | 33 V ±2.5 V |
| Output power limit | Primary power limited | Pin max. 160 W Pout min. 110 W |
| Short circuit protection | | Burst mode operation |
| Input | | |
| Input voltage range | | 90-253 Vac 127-357 Vdc |
| | | |
| Input frequency range | | 47-440 Hz |
| Input surge current | 110 Vac. 50 Hz | 17 A |
| | 230 Vac. 50 Hz | 35 A |
| Safety ground leakage current | 132 Vac | 50 µA |
| | 264 Vac | 100 µA |

All specifications are typical at nominal input, full load at 25°C unless otherwise stated



EMC Characteristics

| | | |
|---------------------|----------------------|------------------|
| Conducted emissions | EN55022, FCC part 15 | Level A |
| Radiated emissions | EN55022, FCC part 15 | Level A |
| ESD air | EN61000-4-2, level 3 | Perf. criteria 1 |
| ESD contact | EN61000-4-2, level 4 | Perf. criteria 1 |
| Surge | EN61000-4-3, level 3 | Perf. criteria 1 |
| Fast transients | EN61000-4-4, level 3 | Perf. criteria 1 |
| Radiated immunity | EN61000-4-5, level 3 | Perf. criteria 2 |
| Conducted immunity | EN61000-4-6, level 3 | Perf. criteria 2 |

General Specifications

| | | |
|--|-----------------------|--|
| Hold-up time | 110 Vac @ 80 W | 35 ms |
| | 110 Vac @ 110 W | 17 ms |
| | 230 Vac @ 80 W | 140 ms |
| | 230 Vac @ 110 W | 100 ms |
| Efficiency | Multiple outputs | 70% typical |
| | +5.1 V single | 70% typical |
| | 12 V and 15 V singles | 72% typical |
| | 24 V single | 75% typical |
| Isolation voltage | Input/output | 4000 Vac |
| | Input/chassis | 1500 Vac |
| Approvals and standards (see note 12) | | VDE0750, IEC60601, IEC1010, UL2601 CSA C22.2 No. 125 |
| Weight | Singles | 550 g (19.4 oz) |
| | Multiple outputs | 600 g (21.2 oz) |
| MTBF (@25° C) | MIL-HDBK-217E | 125,000 hours min. |

Environmental Specifications

| | | |
|--|---|------------------|
| Thermal performance (See notes 9, 10) | Operating, see curve | 0° C to +70 °C |
| | Non-operating | -40 °C to +85 °C |
| | 0 °C to 50 °C amb. convection cooled | 80 W |
| | +50 °C to +70 °C, amb. convection cooled | Derate 2 W/°C |
| | 0 °C to +50 °C, 20 CFM forced air | 110 W |
| | +50 °C to +70 °C, 20CFM forced air | Derate 2.75 W/°C |
| | Peak, 0 °C to +50 °C, max. 60 seconds | 110W |
| Relative humidity | Non-condensing | 5% to 95% RH |
| Altitude | Operating | 10,000 feet max. |
| | Non-operating | 40,000 feet max. |
| Vibration (See Note 11) | 5-500 Hz | 2.4 G rms peak |

Ordering Information

| Output Voltage | Output Currents | | | Ripple ⁽⁴⁾ | Total Regulation ⁽⁵⁾ | Model Numbers ^(13, 14, F) |
|--|--------------------|---------------------|--------------------|-----------------------|---------------------------------|--------------------------------------|
| | Max ⁽¹⁾ | Peak ⁽²⁾ | Fan ⁽³⁾ | | | |
| +5.1 V | 8 A | 20 A | 10 A | 50 mV | ±2.0% | NFS110-7901PJ |
| +12 V | 4.5 A | 9 A | 5 A | 120 mV | ±3.0% | |
| -12 V | 0.5 A | 1.5 A | 1 A | 120 mV | ±3.0% | |
| -5 V | 0.5 A | 1.5 A | 1 A | 50 mV | ±3.0% | |
| +5.1 V (I _A) | 8 A | 20 A | 10 A | 50 mV | ±2.0% | NFS110-7902PJ |
| +24 V (I _B) ⁽⁶⁾ | 3.5 A | 4.5 A | 4.5 A | 240 mV | +10/-5.0% | |
| +12 V | 4.5 A | 9 A | 5 A | 120 mV | ±3.0% | |
| -12 V | 0.5 A | 1.5 A | 1 A | 120 mV | ±3.0% | |
| +5.1 V | 8 A | 20 A | 10 A | 50 mV | ±2.0% | NFS110-7904PJ |
| +15 V | 4 A | 7.5 A | 5 A | 150 mV | ±4.0% | |
| -15 V | 0.5 A | 1.5 A | 1 A | 150 mV | ±3.0% | |
| -5 V | 0.5 A | 1.5 A | 1 A | 50 mV | ±3.0% | |
| 12 V | 7 A | 9 A | 9 A | 120 mV | ±2.0% | NFS110-7912J ^(7,8) |
| 15 V | 5 A | 7.3 A | 7.3 A | 150 mV | ±2.0% | NFS110-7915J ^(7,8) |
| 24 V | 3.5 A | 4.5 A | 4.5 A | 240 mV | ±2.0% | NFS110-7924J ^(7,8) |

Notes

- 1 Convection cooled, 80 W maximum.
- 2 Peak outputs lasting less than 60 seconds with duty cycle less than 10%. Total peak power must not exceed 110 W.
- 3 Forced air, 20 CFM at 1 atmosphere, 110 W maximum.
- 4 Figure is peak-to-peak. Output ripple is measured across a 50 MHz bandwidth using a 12 inch twisted pair terminated with a 47 µF capacitor.
- 5 Total regulation is defined at the static output regulation at 25 °C, including initial tolerance, line voltage within stated limits and output voltages adjusted to their factory settings. Also for NFS110-7902PJ, for 24 V output stated regulation $I_A / I_B \geq 5$. This output will maintain ±5.0% regulation if $I_A \geq 5 A$, where $I_A = +5.1 V$ output current and $I_B = +24 V$ output current.
- 6 Single output models have floating outputs which may be referenced as either positive or negative. Higher voltage supplies, may be adjusted over a wide output voltage range, as long as the total output power does not exceed 80 Watts (natural convection) or 110 Watts (forced air).
- 7 Power fail detect not available on single output models.
- 8 Derating curve is application specific for ambient temperatures > 50 °C, for optimum reliability no part of the heatsink should exceed 90 °C and no semiconductor case temperature should exceed 100 °C.
- 9 Caution: Allow a minimum of 1 second after disconnecting the power when making thermal measurements.
- 10 The user should read the PSU installation instructions in conjunction with the relevant national safety regulations in order to ensure compliance.
- 11 Three orthogonal axes, random vibration, 10 minute test for each axis.
- 12 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- 13 The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 14 NOTICE: Some models do not support all options. Please contact your local Emerson Network Power representative or use the on-line model number search tool at <http://www.powerconversion.com> to find a suitable alternative.

TRANSIENT RESPONSE


| | | |
|---------------|--------------------|---------------------------------|
| NFS110-7901PJ | +5.1 V (7.5-10 A) | 150 mV peak, 1 ms recovery |
| | +12 V (2.5-5 A) | 100 mV peak, 0.5 ms recovery |
| | -12 V (0.5-1 A) | 100 mV peak, 0.5 ms recovery |
| | -5 V (0.5-1 A) | 100 mV peak, 0.5 ms recovery |
| NFS110-7902PJ | +5.1 V (7.5-10 A) | 150 mV peak, 1 ms recovery |
| | +12 V (2.5-5 A) | 100 mV peak, 0.5 ms recovery |
| | -12 V (0.5-1 A) | 100 mV peak, 0.5 ms recovery |
| | 24 V (1.5-3 A) | 300 mV peak, 1 ms recovery |
| NFS110-7904PJ | +5.1 V (7.5-10 A) | 150 mV peak, 1 ms recovery |
| | +15 V (2.5-5 A) | 100 mV peak, 0.5 ms recovery |
| | -15 V (0.5-1 A) | 100 mV peak, 0.5 ms recovery |
| | -5 V (0.5-1 A) | 100 mV peak, 0.5 ms recovery |
| NFS110-7905J | +5.1 V (10-20 A) | 250 mV peak, 1 ms recovery |
| NFS110-7912J | +12 V (4.5-9 A) | 360 mV peak, 1 ms recovery |
| NFS110-7915J | +15 V (3.65-7.3 A) | 450 mV peak, 1 ms recovery |
| NFS110-7924J | +24 V (2.25-4.5 A) | 720 mV peak, |

AC (J1) mating connector

Molex 09-50-3051 or Molex 09-91-0500 mating connector with 2478 or equivalent crimp terminals.



DC (J2) mating connector

Molex 09-50-3131 or Molex 09-91-1300 mating connector with 2478 or equivalent crimp terminals.



Power fail detect signal (Note 8)

50ms ≤ T1 ≤ 200ms
T2 will vary with line and load
T3 ≥ 3ms
Pout: 110W
PFD output is an open collector which will sink ≤ 40mA in the low state.

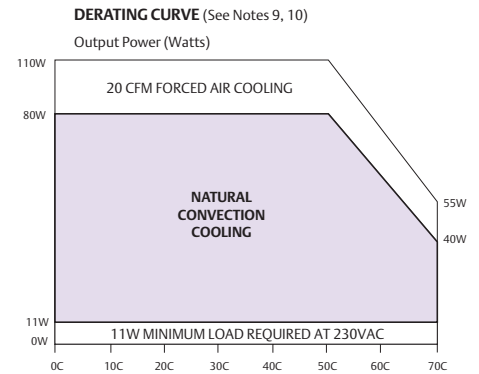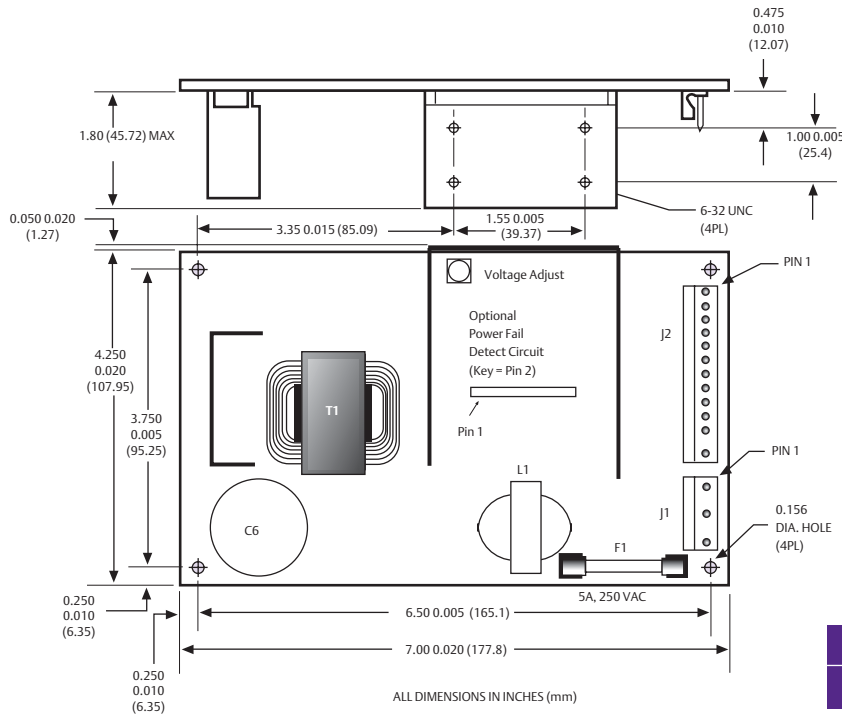

Mechanical Notes

- A Metallic or non-metallic stand-offs (maximum diameter 5.4mm) can be used in all four mounting holes without effecting safety approval.
- B The ground pad of the mounting hole near J1, allows system grounding through a metal stand-off to the system chassis.
- C The heat sink is grounded, and allows system grounding by mechanical connection to the system chassis.
- D The supply must be mechanically supported using the PCB mounting holes and may be additionally supported by the heatsink mounting holes.
- E It is always advisable to attach the power supply heat sink to another thermal dissipator (such as a chassis or finned heatsink etc). The resulting decrease in heat sink mounted component temperatures will improve power supply lifetime.
- F A standard L-bracket and cover is available for mounting which contains all screws, connectors and necessary mounting hardware. The kit is available, order part number "NFS110CJ".

| Pin Connections | | | | |
|-----------------|-----------------|------------|------------|------------------|
| J1 | -7901PJ | -7902PJ | -7904PJ | SINGLES |
| Pin 1 | AC Ground | AC Ground | AC Ground | AC Ground |
| Pin 2 | AC Neutral | AC Neutral | AC Neutral | AC Neutral |
| Pin 3 | AC Line | AC Line | AC Line | AC Line |
| J2 | | | | |
| Pin 1 | +5.1 V | +5.1 V | +5.1 V | V _{out} |
| Pin 2 | +5.1 V | +5.1 V | +5.1 V | V _{out} |
| Pin 3 | +5.1 V | +5.1 V | +5.1 V | V _{out} |
| Pin 4 | Return | Return | Return | Return |
| Pin 5 | Return | Return | Return | Return |
| Pin 6 | Return | Return | Return | Return |
| Pin 7 | Return | Return | Return | Return |
| Pin 8 | +12 V | +12 V | +15 V | V _{out} |
| Pin 9 | +12 V | +12 V | +15 V | V _{out} |
| Pin 10 | PFD | PFD | PFD | N/C |
| Pin 11 | -12 V | -12 V | -15 V | N/C |
| Pin 12 | Removed for Key | | | |
| Pin 13 | -5 V | +24 V | -5 V | N/C |

N/C = no connection.

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA

Telephone: +1 (760) 930 4600
Facsimile: +1 (760) 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom

Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong

Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.powerconversion.com
**[technicalsupport@
powerconversion.com](mailto:technicalsupport@powerconversion.com)**

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2008 Emerson Electric Co.