



HHR-370AH/FT Cylindrical LFat/A size for back-up use

Dimensions (with tube) (mm)

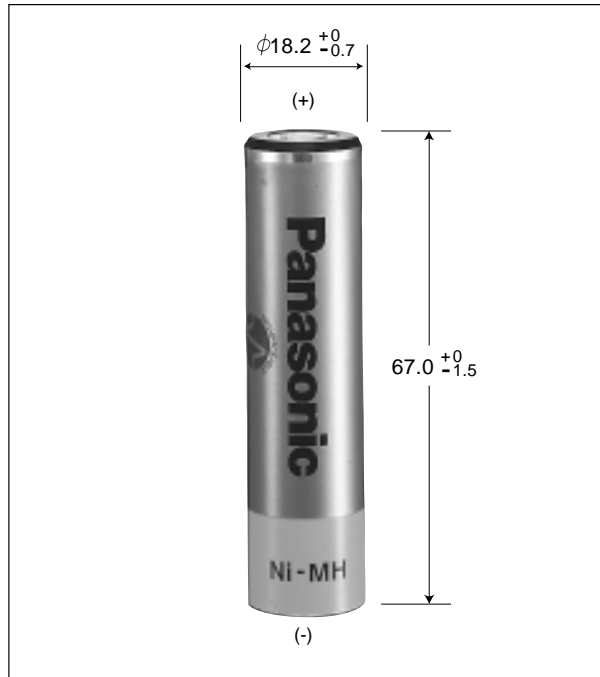


Typical charge characteristics

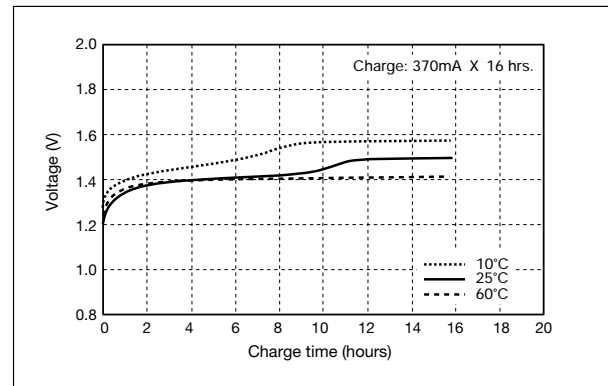


Specifications

Diameter	18.2+0 / -0.7mm
Height	67.0+0 / -1.5mm
Approximate Weight	60g

Nominal Voltage		1.2V	
Discharge Capacity ^{*1}	Average ^{*2}	3,700mAh	
	Rated (min.)	3,500mAh	
Approx. Internal impedance at 1000Hz at charged state.		20mΩ	
Charge	Standard	370mA X 16hrs.	
	Rapid ^{*3}	3,000mA X 1.4hrs.	
	Low rate	185mA X 32hrs. 123mA X 48hrs.	
Ambient Temperature	Charge	Standard	-10°C to 60°C
		Rapid	
	Low rate	-10°C to 45°C	
Discharge		-10°C to 60°C	
Storage	<1 year	-20°C to 35°C	
	<6 months	-20°C to 45°C	
	<1 month	-20°C to 55°C	
	<1 week	-20°C to 65°C	

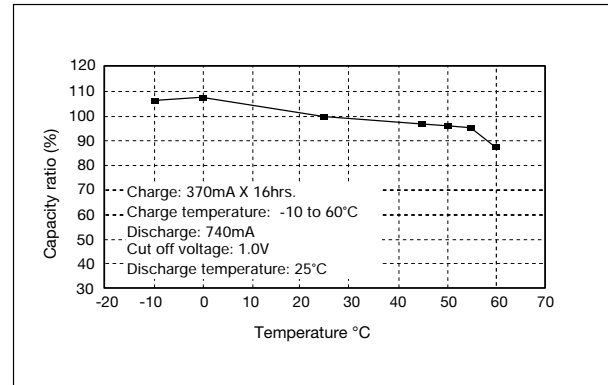

Typical discharge characteristics

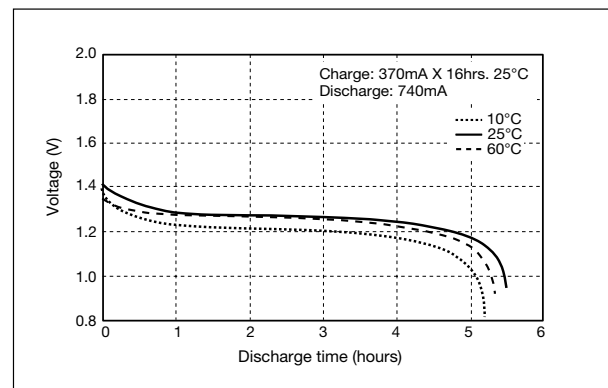

*1 After charging at 0.1It for 16 hours, discharging at 0.2It.

*2 For reference only.

*3 Please consult Panasonic for details of dT/dt.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.