

- Timers
- Time Switches
- Counters
- Logic Controllers
- Supply Monitoring Devices
- PID Controllers



INDEX

CONTENTS	PAGE NOS.
TIMERS	03
Electronic Timer - Series Micon™ 175	04
Electronic Timer - Series Micon™ 225	05-10
Electronic Timer - Series Micon™ 350	11
Electronic Timer - Series Micon™ 480	12-13
Electronic Timer - Series Micon™ 780	14-15
Digital Timer <i>Eliso</i> ®	16-18
Synchronous Timer - Series EM 1000	19
Synchronous Timer - Series EM 2000	20
Glossary	21
Operating Modes / Functions	22
TIME SWITCHES	23
Time Switch FM Series	24
Digital Time Switch <i>Crono</i> ™ & <i>Pulse</i>	25
Astronomical Time Switch <i>Astro</i> ™	26-27
Lighting Automation with <i>Astro</i> ™ Using GSM Technology	28-29
HOOR METERS & COUNTERS	31
Hour Meter Series HM 36	32-33
Hour Meter Series HM 48	34
Digital Hour Meters	35
Impulse Counter Series CR 26	36-37
Digital Counters	38
PROGRAMMABLE LOGIC CONTROLLERS	39
Programmable Logic Controller Series <i>Genie</i> ™- <i>AX</i>	40-42
SUPPLY MONITORING DEVICES	43
Supply Monitoring Series SM 301	44
Supply Monitoring Series SM 500	45-46
Supply Monitoring Series SM 501	47-49
Supply Monitoring Series SM 175	50-51
Frequency Monitoring Series PD 225	52-53
PTC Thermistor Relay Series PD 225	54
PTC Thermistor Relay & Phase Sequence Series PD 225	55
Supply Monitoring Series CMR - Current Control	56
Earth Leakage Relay Series CMR	57-58
TEMPERATURE CONTROLLERS	59
PID Temperature Controller Series PR 69	60-62

TIMERS

Electronic Timer - Series Micon™ 175

Electronic Timer - Series Micon™ 225

Electronic Timer - Series Micon™ 350

Electronic Timer - Series Micon™ 480

Electronic Timer - Series Micon™ 780

Digital Timer *Eliso*®

Synchronous Timer - Series EM 1000

Synchronous Timer - Series EM 2000

Glossary

Operating Modes / Functions

INTERNATIONAL APPROVALS:



Electronic Timer - Series Micon™ 175

- Compact 17.5mm
- Time range: 0.3s - 30 h
- Highly accurate
- Functions: On Delay, One Shot
- Integrated dual voltage selection
- Separate indications for power and relay status
- Low power consumption




Cat. No.	11ODT4	11BDT4
Parameters		
Mode	ON Delay	One Shot
Functional Diagram	<p>S = Supply R = Relay</p>	
Supply Voltage	110 VAC / 24 VAC/DC (Selectable)	110 VAC / 24 VAC/DC (Selectable)
Supply Variation	- 20% to +10%	
Frequency	50/60 Hz	
Timing Ranges	0.3s to 30 h	
Reset Time	100 ms (Max.)	
Accuracy:		
Setting Accuracy	± 5% of Full scale	
Repeat Accuracy	± 1%	
Relay Output	1 C/O (SPDT)	
Contact Rating	5A (resistive) @ 240 VAC / 28 VDC	
Contact Material	Ag Alloy	
Electrical Life	1X10 ⁵	
Switching Frequency @ rated max load	1000 operations/h (Max.)	
Operating Temperature	-10°C to +55°C	
Storage Temperature	-20°C to +70°C	
LED Indication	Green LED → Power ON, Red LED → Relay ON	
Housing	Flame Retardant UL94V0	
Dimension (W x H x D)	18 X 65 X 90 (in mm)	
Weight	75 g (unpacked)	
Mounting	Base / DIN rail	
Certification	CE	
EMI/ EMC		
Radio Interference Suppression	CISPR 14-1 Class B	
ESD	IEC 61000-4-2 Level III	
Electrical Fast Transients	IEC 61000-4-4 Level IV	
Surges	IEC 61000-4-5 Level IV	
Voltage Dips & Interruptions	IEC 61000-4-11 All 7 Levels	


ORDERING INFORMATION

Cat. No.	Description
11ODT4	110 VAC, 24 VAC/DC, On Delay
12ODT4	240 VAC, 24 VAC/DC, On Delay
15ODT4	12 VDC, On Delay
11ODT8	110 VAC, 24 VAC/DC, On Delay Retentive
12ODT8	240 VAC, 24 VAC/DC, On Delay Retentive
11BDT4	110 VAC, 24 VAC/DC, One Shot
12BDT4	240 VAC, 24 VAC/DC, One Shot
15BDT4	12 VDC, One Shot

MOUNTING DIMENSION (mm)

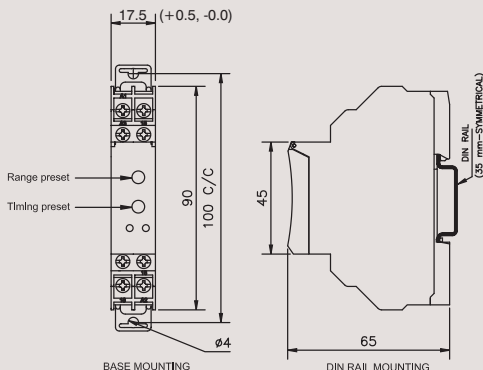

CONNECTION DIAGRAM

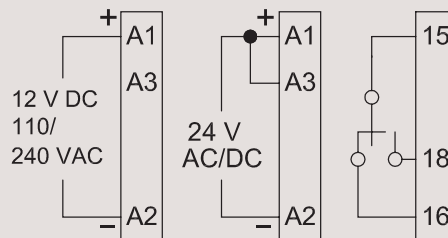

*Note: For terminal torque & terminal capacity please refer page no. 13

Electronic Timer - Series Micon™ 225

- World-Class design
- Compact 22.5mm
- Single and Multi-function (Non-Signal and Signal based) timers
- Multi-voltage: Single model suitable for both AC and DC applications
- Flush knobs for better security
- LED indications for runtime and relay status
- Finger protection on terminals (IP20)
- Excellent Noise Immunity to the latest IEC standards



Cat. No.	2A5DT5	2AJDT0	2ASDT0
Parameters			
Mode	Multi-function Multi range	Asymmetrical ON-OFF / OFF-ON	Star-Delta
Functional Diagram			
Supply Voltage	24 - 240 VAC/DC		
Supply Variation	- 20% to +10%		
Frequency	50/60 Hz		
Power Consumption (Max.)	4 VA		7 VA
Timing Ranges	0.1s to 10h		
Pause Time (P)	Not Applicable		
Reset Time	Max. 200 ms		
Accuracy			
Setting Accuracy	± 5% of Full scale		
Repeat Accuracy	± 1%		
Relay Output	2 C/O (DPDT)	1 C/O (SPDT)	Star - 1 'NO', Delta - 1 'NO'
Contact Rating	5A @ 240 VAC / 28 VDC (Resistive)		
Contact Material	Ag Alloy		
Electrical Life	1x10 ⁵		
Mechanical Life	1x10 ⁵		
Switching Frequency @ rated max load	Electrical : 1800 Operations / h		
Operating Temperature	-15°C to +60°C		
Storage Temperature	-20°C to +80°C		
Humidity	95% (Rh)		
LED Indication	Green LED → Power ON, Red LED → Relay ON		Red 1- Δ ON, Red 2- Δ ON
Housing	Flame Retardant UL94-V0		
Dimension (W x H x D)	22.5 X 75 X 100.5 (in mm)		
Weight	130 g (unpacked)		
Mounting	Base / DIN rail		
Certification	CE		
Degree of Protection	IP 20 for Terminal, IP 40 for Housing		
EMI/ EMC			
Radio Interference Suppression	CISPR 14-1 Ed. 5.0 (2005-11) Class A		
ESD	IEC 61000-4-2 Ed. 1.2 (2001-04) Level III		
Electrical Fast Transients	IEC 61000-4-4 Ed. 2.0 (2004-07) Level IV		
Surges	IEC 61000-4-5 Ed. 2.0 (2005-11) Level IV		
Voltage Dips & Interruptions	IEC 61000-4-11 (AC) Ed. 2.0 (2004-03), IEC 61000-4-29 (DC) Ed. 1.0 (2000-08)		

ORDERING INFORMATION

Cat. No.	Description
2A5DT5	24-240 VAC/DC, Multi-function, 2 C/O
2B5DT5	240-415 VAC, Multi-function, 2 C/O
273DT5	240 VAC, Multi-function (On Delay, Interval, Cyclic), 2 C/O
2AODT5	24-240 VAC/DC, On Delay, 2 C/O
29ODT5	9-32 VDC, On Delay, 2 C/O
2ASDT0*	24-240 VAC/DC, Star-Delta, 1 NO (Star) + 1 NO (Delta)
2ASDT1	24-240 VAC/DC, Star-Delta, 1 NO (Star) + 1 NO (Delta)
2BSDT0*	240-415 VAC, Star-Delta, 1 NO (Star) + 1 NO (Delta)
2BSDT1	240-415 VAC, Star-Delta, 1 NO (Star) + 1 NO (Delta)
2AJDT0*	24-240 VAC/DC, Asymmetric ON/OFF, OFF/ON, 1 C/O
2AJDT1	24-240 VAC/DC, Asymmetric ON/OFF, OFF/ON, 1 C/O
2AADT5	24-240 VAC/DC, Asymmetric ON/OFF, 2 C/O
25ADT5	12 VDC, Asymmetric ON/OFF, 2 C/O

*Note: Product with test voltage between input and output at 1.5 kV

Electronic Timer - Series Micon™ 225

• Solid state signal based Multi-function



Cat. No.	20NDTT
Parameters	
Mode	Signal ON Delay, Accumulative ON Delay, Signal OFF Delay, Signal OFF/ON Delay, Leading Edge Impulse 1, ON Delay, Interval
Functional Diagram	
Supply Voltage	110 - 240 VAC
Supply Variation	- 20% to +10%
Frequency	50/60 Hz
Power Consumption (Max.)	3 VA
Timing Ranges	0.06s to 10h
Reset Time	Max. 100 ms
Accuracy	
Setting Accuracy	± 5% of Full scale
Repeat Accuracy	± 1%
Solid State Output:	
Type	Optical Isolation
Form	SPST
Rated Current	1 A AC
Max. Admissible Current	20 A (10ms)
Leakage Current	<5 mA
Voltage Breaking Capacity	110 - 240 VAC
Max. Voltage Drop at Terminals	<= 8 V
Minimum Load Current	10 mA
Electrical Life	1 x 10 ⁶
Operating Temperature	-15° C to +60° C
Storage Temperature	-20° C to +80° C
Humidity	95% (Rh)
LED Indication	Green LED → Power ON Red LED → Output ON
Housing	Flame Retardant UL94-V0
Dimension (W x H x D)	22.5 X 75 X 100.5 (in mm)
Weight	107 g (unpacked)
Mounting	Base / DIN rail
Certification	CE
Degree of Protection	IP 20 for Terminal, IP 40 for Housing
EMI/ EMC	
Radio Interference Suppression	CISPR 14-1 Ed. 5.0 (2005-11) Class B
ESD	IEC 61000-4-2 Ed. 1.2 (2001-04) Level III
Electrical Fast Transients	IEC 61000-4-4 Ed. 2.0 (2004-07) Level IV
Surges	IEC 61000-4-5 Ed. 2.0 (2005-11) Level IV
Voltage Dips & Interruptions	IEC 61000-4-11 (AC) Ed. 2.0 (2004-03), IEC 61000-4-29 (DC) Ed. 1.0 (2000-08)

ORDERING INFORMATION

Cat. No.	Description
20NDTT	110-240 VAC, Solid State Signal Based Multi-function
20JDTT	110-240 VAC, Solid State Asymmetrical ON-OFF / OFF-ON

Electronic Timer - Series Micon™ 225

• Signal based Multi-function



Cat. No.	2ANDT0
Parameters	
Mode	Signal ON Delay, Accumulative ON Delay, Signal OFF Delay, Signal OFF/ON Delay, Leading Edge Impulse 1, ON Delay, Interval
Functional Diagram	
Supply Voltage	24 - 240 VAC/DC
Supply Variation	- 20% to +10%
Frequency	50/60 Hz
Power Consumption (Max.)	4 VA
Timing Ranges	0.1s to 10h
Reset Time	Max. 200 ms
Accuracy	
Setting Accuracy	± 5% of Full scale
Repeat Accuracy	± 1%
Relay Output	1 C/O (SPDT)
Contact Rating	5A @ 240 VAC / 28 VDC (Resistive)
Contact Material	Ag Alloy
Electrical Life	1x10 ⁵
Mechanical Life	1x10 ⁶
Switching Frequency @ rated max load	Electrical : 1800 Operations / h
Operating Temperature	-15° C to +60° C
Storage Temperature	-20° C to +80° C
Humidity	95% (Rh)
LED Indication	Green LED → Power ON Red LED → Relay ON
Housing	Flame Retardant UL94-V0
Dimension (W x H x D)	22.5 X 75 X 100.5 (in mm)
Weight	130 g (unpacked)
Mounting	Base / DIN rail
Certification	
Degree of Protection	IP 20 for Terminal, IP 40 for Housing
EMI/ EMC	
Radio Interference Suppression	CISPR 14-1 Ed. 5.0 (2005-11) Class B
ESD	IEC 61000-4-2 Ed. 1.2 (2001-04) Level III
Electrical Fast Transients	IEC 61000-4-4 Ed. 2.0 (2004-07) Level IV
Surges	IEC 61000-4-5 Ed. 2.0 (2005-11) Level IV
Voltage Dips & Interruptions	IEC 61000-4-11 (AC) Ed. 2.0 (2004-03), IEC 61000-4-29 (DC) Ed. 1.0 (2000-08)

ORDERING INFORMATION

Cat. No.	Description
2ANDT0	24-240 VAC/DC, Signal Based Multi-function

Electronic Timer - Series Micon™ 225

- True off delay with 2 C/O upto 600 seconds



Cat. No.	23GDT0
Parameters	
Mode	True Off delay (Power Off delay)
Functional Diagram	<p>T = SET TIME</p>
Supply Voltage	24 - 240 VAC/DC
Supply Variation	-10 to +20%
Power Consumption (Max.)	2.5 VA
Frequency	50-60 Hz
Energizing Time	1 s minimum
Timing Range	0.6s to 600s
Accuracy	
Setting Accuracy	± 5% of Full scale
Repeat Accuracy	± 1%
Relay Output	2 C/O (DPDT)
Contact Rating	5A @ 240 VAC / 28 VDC (Resistive)
Contact Material	Ag Alloy
Electrical Life	1x10 ⁵
Mechanical Life	1x10 ⁶
Switching Frequency @ rated max load	Electrical : 1800 Operations / h
Operating Temperature	-15° C to +60° C
Storage Temperature	-20° C to +80° C
Humidity	95% (Rh)
LED Indication	Green LED → Power ON
Housing	Flame Retardant UL94-V0
Dimension (W x H x D)	22.5 X 75 X 100.5 (in mm)
Weight	130 g (unpacked)
Mounting	Base / DIN rail
Certification	CE
Degree of Protection	IP 20 for Terminal, IP 40 for Housing
EMI/ EMC	
Radio Interference Suppression	CISPR 14-1 Ed. 5.0 (2005-11) Class B
ESD	IEC 61000-4-2 Ed. 1.2 (2001-04) Level III
Electrical Fast Transients	IEC 61000-4-4 Ed. 2.0 (2004-07) Level IV
Surges	IEC 61000-4-5 Ed. 2.0 (2005-11) Level IV
Voltage Dips & Interruptions	IEC 61000-4-11 (AC) Ed. 2.0 (2004-03), IEC 61000-4-29 (DC) Ed. 1.0 (2000-08)

ORDERING INFORMATION

Cat. No.	Description
23GDT0	24-240 VAC/DC, True-off Delay (Power Off Delay)

Electronic Timer - Series Micon™ 225

- Single phase motor restart control timer with memory time, under voltage trip and ON delay



Cat. No.	22LDT0
Parameters	
Mode	Motor Restart
Functional Diagram	<p>The diagram shows a timing sequence where a power fail event (t) occurs. After the power returns, the timer starts a memory time (Tm). If the power fails again during Tm, the timer resets. Once Tm expires, a delay time (Td) begins before the motor restarts. The diagram also shows the effect of a STOP signal during the memory time.</p>
Supply Voltage	240 VAC
Supply Variation	- 20% to +10%
Frequency	50/60 Hz
Power Consumption (Max.)	4 VA
Timing Ranges	Memory Time (Tm): 0.2 to 6s, Delay Time (Td): 0.2 to 60s Trip Volt: 176 VAC, +/- 6VAC, Hysteresis: 10 VAC max.
Reset Time	Max. 200 ms
Accuracy	
Setting Accuracy	± 5% of Full scale
Repeat Accuracy	± 1%
Relay Output	1 C/O (SPDT)
Contact Rating	5A @ 240 VAC / 28 VD C (Resistive)
Contact Material	Ag Alloy
Electrical Life	1x10 ⁵
Mechanical Life	1x10 ⁶
Switching Frequency @ rated max load	Electrical : 1800 Operations / h
Operating Temperature	-15° C to +60° C
Storage Temperature	-20° C to +80° C
Humidity	95% (Rh)
LED Indication	Green LED → Power On, Red LED → Relay On
Housing	Flame Retardant UL94-V0
Dimension (W x H x D)	22.5 X 75 X 100.5 (in mm)
Weight	130 g (unpacked)
Mounting	Base / DIN rail
Certification	
Degree of Protection	IP 20 for Terminal, IP 40 for Housing
EMI/ EMC	
Radio Interference Suppression	CISPR 14-1 Ed. 5.0 (2005-11) Class A
ESD	IEC 61000-4-2 Ed. 1.2 (2001-04) Level III
Electrical Fast Transients	IEC 61000-4-4 Ed. 2.0 (2004-07) Level IV
Surges	IEC 61000-4-5 Ed. 2.0 (2005-11) Level IV
Voltage Dips & Interruptions	IEC 61000-4-11 (AC) Ed. 2.0 (2004-03)


ORDERING INFORMATION

Cat. No.	Description
22LDT0	240 VAC, Motor Restart Control


Electronic Timer - Series Micon™ 225



MOUNTING DIMENSION (mm)

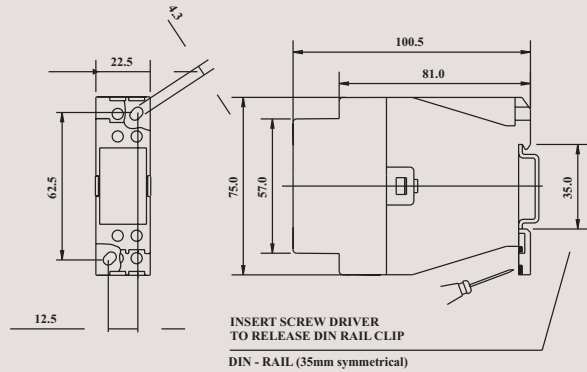


For -
2A5DT5, 2B5DT5, 2AODT5, 2ASDT0, 2ASDT1,
2BSDT0, 2BSDT1, 2AJDT0, 2AJDT1, 2AADT5,
20JDTT, 20NDTT, 2ANDT0, 23GDT0, 22LDT0

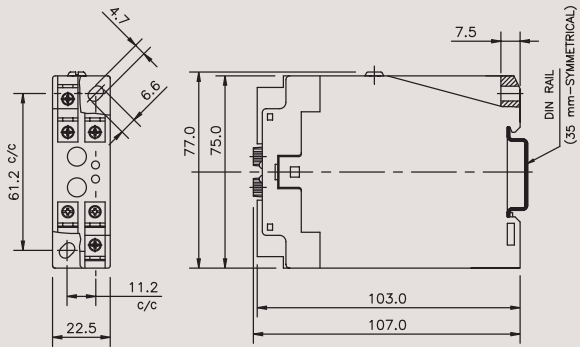


For -
273DT5, 29ODT5, 25ADT5

CONNECTION DIAGRAM


2A5DT5, 2B5DT5, 2AADT5,
23GDT0, 2AODT5, 273DT5,
29ODT5, 25ADT5




2AJDT0, 2AJDT1




2ASDT0, 2BSDT0,
2ASDT1, 2BSDT1




20JDTT, 20NDTT



2ANDT0



22LDT0

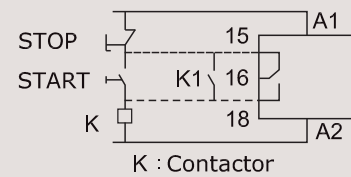

TERMINAL TORQUE & TERMINAL CAPACITY

	Torque 0.6 N.m (6 Lb. in) Terminal Screw - M3
	1 x 1 - 4 mm ² Solid Wire / Single Wire Ferrule
	2 x 0.5 - 2.5 mm ² insulated twin type Ferrule
AWG	1 x 17 to 11

Electronic Timer - Series Micon™ 350

- Selectable ON delay/Retentive ON delay
- Inbuilt instant contact with 2C/O




Cat. No.	36EDT7	33EDT7	37EDT7
Parameters			
Mode	ON Delay/Retentive ON Delay (Selectable)		
Functional Diagram	<p>S = Supply R = Relay</p>		<p>T= SET TIME T=t1 + t2 + t3 tp1, tp2 = Power down region</p>
Supply Voltage	24 VAC/DC	110 VAC	240 VAC
Supply Variation	- 20% to +10%		
Frequency	50/60 Hz		
Timing Ranges	0.3s to 30h		
Reset Time	100 ms (Max.)		
Accuracy			
Setting Accuracy	± 5% of Full scale		
Repeat Accuracy	± 1%		
Relay Output	1 Instant C/O + 2 Delayed C/O		
Contact Rating	5A (resistive) @ 240 VAC / 28 VDC		
Contact Material	AgCdO		
Electrical Life	1x10 ⁵		
Switching Frequency @ rated max load	1000 operations/h (Max.)		
Operating Temperature	-10° C to +55° C		
Storage Temperature	-20° C to +70° C		
LED Indication	Green LED → Power ON, Red LED → Relay ON		
Housing Dimension (W x H x D)	Flame Retardant UL94V0 36 X 90 X 67 (in mm)		
Weight	135 g (unpacked)		
Mounting	Base / DIN rail		
Certification	CE		
EMI/ EMC			
Radio Interference Suppression	CISPR 14-1 Class B		
ESD	IEC 61000-4-2 Level III		
Electrical Fast Transients	IEC 61000-4-4 Level IV		
Surges	IEC 61000-4-5 Level IV		
Voltage Dips & Interruptions	IEC 61000-4-11 All 7 Levels		


ORDERING INFORMATION

Cat. No.	Description
36EDT7	24 AC/DC, ON Delay/Retentive ON Delay
33EDT7	110V AC, ON Delay/Retentive ON Delay
37EDT7	240V AC, ON Delay/Retentive ON Delay

MOUNTING DIMENSION (mm)

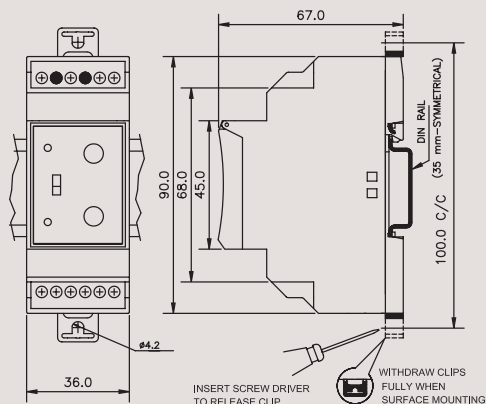

CONNECTION DIAGRAM

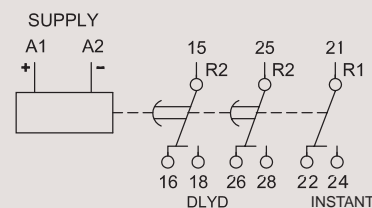

TERMINAL TORQUE & CAPACITY

<p>Ø 3.5 mm</p>	<p>Torque 0.54 N.m (5 Lb. in)</p> <p>Terminal Screw - M 2.5</p>
	<p>1 x 0.2 - 3.3 mm² Solid Wire / single wire ferrule</p>
	<p>2 x 0.2 - 1 mm² Insulated with twin ferrule</p>
AWG	1 x 24 to 12

Electronic Timer - Series Micon™ 480

- Multi-function, Asymmetrical ON/OFF, and Star-Delta timers
- Wide operating voltage range
- Front access for frequent change of parameters
- Universal mounting




Cat. No.	40MFS0	40AFS0	40SFS0												
Parameters															
Mode	Multi-function	Asymmetrical ON/OFF	Star-Delta												
Functional Diagram	<table border="1" style="display: inline-table; margin-right: 20px;"> <thead> <tr> <th>MODE</th> <th>FUNCTION</th> </tr> </thead> <tbody> <tr> <td></td> <td> </td> </tr> <tr> <td>ON DELAY</td> <td> </td> </tr> <tr> <td>INTERVAL</td> <td> </td> </tr> <tr> <td>CYCLIC</td> <td> </td> </tr> <tr> <td>SIGNAL OFF DELAY</td> <td> </td> </tr> </tbody> </table> <div style="display: inline-block; vertical-align: top;"> </div> <div style="display: inline-block; vertical-align: top;"> </div>			MODE	FUNCTION			ON DELAY		INTERVAL		CYCLIC		SIGNAL OFF DELAY	
MODE	FUNCTION														
ON DELAY															
INTERVAL															
CYCLIC															
SIGNAL OFF DELAY															
Supply Voltage	24 - 240 VAC/DC		110/240 VAC												
Supply Variation	- 20% to + 10%														
Frequency	50/60 Hz														
Timing Ranges	0.1s to 10h	0.1s to 10h (ON & OFF Both)	0.3s to 120s												
Pause Time	N.A.		60ms, 90ms, 120ms, 150ms												
Reset Time	100 ms (max.)														
Accuracy															
Setting Accuracy	± 5% of Full scale														
Repeat Accuracy	± 1%														
Relay Output	2 C/O		Star - 1 'NO', Delta - 1 'NO'												
Contact Rating	5A (resistive) @ 240 VAC / 28 VDC														
Contact Material	AgCdO														
Electrical Life	1x10 ⁵														
Switching Frequency @ rated max load	1000 operations/h (Max.)														
Operating Temperature	-10° C to +55° C														
Storage Temperature	-20° C to +70° C														
LED Indication	Green LED Power ON, Red LED Relay ON		Red 1 \wedge ON, Red 2 Δ ON												
Housing	Flame Retardant UL94V0														
Dimension (W x H x D)	48 X 48 X 95 (in mm)														
Weight	114 g (unpacked)														
Mounting	Base / DIN Rail, Flush with 11 or 8 pin Universal or Solderable socket														
Certification	CE														
EMI/ EMC															
Radio Interference Suppression	CISPR 14-1 Class B														
ESD	IEC 61000-4-2 Level III														
Electrical Fast Transients	IEC 61000-4-4 Level IV														
Surges	IEC 61000-4-5 Level IV														
Voltage Dips & Interruptions	IEC 61000-4-11 All 7 Levels														

ORDERING INFORMATION

Cat. No.	Description
40MFS0	24-240 VAC/DC, Multi-function with Signal Off Delay, 2 C/O, 11 Pin
40MFE0	24-240 VAC/DC, Multi-function, 2 C/O, 8 Pin
40AFS0	24-240 VAC/DC, Asymmetrical ON/OFF, 2 C/O, 11 Pin
40SFS0	24-240 VAC, Star-Delta, 1 NO (Star) + 1 NO (Delta), 11 Pin
46OFE8	24 VAC/DC, On Delay, 1 instant + 1 delayed C/O, 8 Pin
43OFE8	110 VAC, On Delay, 1 instant + 1 delayed C/O, 8 Pin
47OFE8	240 VAC, On Delay, 1 instant + 1 delayed C/O, 8 Pin




MOUNTING DIMENSION (mm)

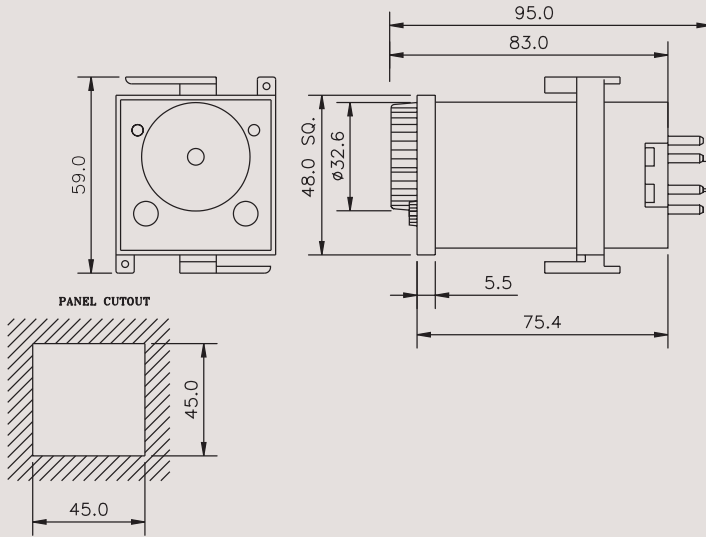


CONNECTION DIAGRAM

For : 40MFS0




Caution : No external voltage should be applied between terminals 5 and 6. These are to be shorted only for giving Control signal


For : 40AFS0




For : 40SFS0

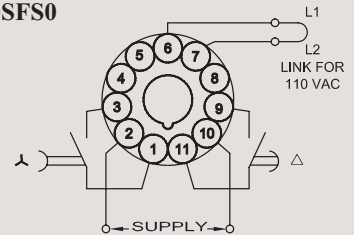

For : 40MFE0



For : 47OFE8, 43OFE8, 46OFE8



Electronic Timer - Series Micon™ 780

- Selectable Dual-voltage:
110/240V AC, 240/415V AC and 24V AC/DC
- Multi-function, Asymmetrical ON/OFF, and Star-Delta timers
- Selectable Contacts:
One instant and One delay/ Two delay
- Large knobs for ease of setting



Cat. No.	70MDTO	70ADTO	70SDTO																	
Parameters																				
Mode	Multi-function	Asymmetrical ON/OFF	Star- Delta																	
Functional Diagram	<table border="1" style="display: inline-table; margin-right: 20px;"> <thead> <tr> <th>MODE</th> <th>FUNCTION</th> </tr> </thead> <tbody> <tr> <td>SUPPLY</td> <td></td> </tr> <tr> <td>INSTANT RLY</td> <td></td> </tr> <tr> <td>ON DELAY</td> <td></td> </tr> <tr> <td>INTERVAL</td> <td></td> </tr> <tr> <td>CYCLIC</td> <td></td> </tr> <tr> <td>SIGNAL OFF DELAY</td> <td></td> </tr> </tbody> </table> <div style="display: inline-block; vertical-align: top;"> <p>SUPPLY</p> <p>RELAY R1 R2 (DLYD)</p> <p>RELAY R2 (INSTANT)</p> </div> <table border="1" style="display: inline-table; margin-left: 20px;"> <tbody> <tr> <td></td> </tr> <tr> <td></td> </tr> <tr> <td>Ts = Set Time P = Pause Time</td> </tr> </tbody> </table>			MODE	FUNCTION	SUPPLY		INSTANT RLY		ON DELAY		INTERVAL		CYCLIC		SIGNAL OFF DELAY				Ts = Set Time P = Pause Time
MODE	FUNCTION																			
SUPPLY																				
INSTANT RLY																				
ON DELAY																				
INTERVAL																				
CYCLIC																				
SIGNAL OFF DELAY																				
Ts = Set Time P = Pause Time																				
Supply Voltage	110 VAC / 240 VAC																			
Supply Variation & Frequency	- 20% to +10% / 50/60 Hz																			
Timing Ranges	0.1s to 10h	0.1s to 10h (ON & OFF Both)	0.3s to 120s																	
Pause Time	N.A.		60ms, 90ms, 120ms, 150ms																	
Reset Time	100 ms (max.)																			
Accuracy																				
Setting Accuracy	± 5% of Full scale																			
Repeat Accuracy	± 1%																			
Relay Output	1 Instant + 1 Delayed or 2 Delayed C/O (Selectable)		Star - 1 'NO', Delta - 1 'NO'																	
Contact Rating	For-110/240 V AC Model - 10A (resistive) @ 240 VAC & For-240/415 V AC Model - 5A (resistive) @ 415 VAC																			
Contact Material	AgSnO																			
Electrical Life	1x10 ⁵																			
Switching Frequency @ rated max load	1000 operations/h (Max.)																			
Operating Temperature	-10° C to +55° C																			
Storage Temperature	-20° C to +70° C																			
LED Indication	Green LED → Power ON, Red LED → Relay ON		Red 1- \wedge ON, Red 2- Δ ON																	
Housing	Flame Retardant UL94V0																			
Dimension (W x H x D)	55 X 78 X 104 (in mm)																			
Weight	210 g (unpacked)																			
Mounting	Base / DIN Rail																			
Certification	CE																			
EMI/ EMC																				
Radio Interference Suppression	CISPR 14-1 Class B																			
ESD	IEC 61000-4-2 Level III																			
Electrical Fast Transients	IEC 61000-4-4 Level IV																			
Surges	IEC 61000-4-5 Level IV																			
Voltage Dips & Interruptions	IEC 61000-4-11 All 7 Levels																			


ORDERING INFORMATION

Cat. No.	Description
70MDTO	110/240 VAC, Multi-function
74MDTO	240/415 VAC, Multi-function
76MDTO	24 VAC/DC, Multi-function
70ADTO	110/240 VAC, Asymmetrical ON/OFF
74ADTO	240/415 VAC, Asymmetrical ON/OFF
76ADTO	24 VAC/DC, Asymmetrical ON/OFF
70SDTO	110/240 VAC, Star-Delta
74SDTO	240/415 VAC, Star-Delta



Electronic Timer - Series Micon™ 780






MOUNTING DIMENSION (mm)

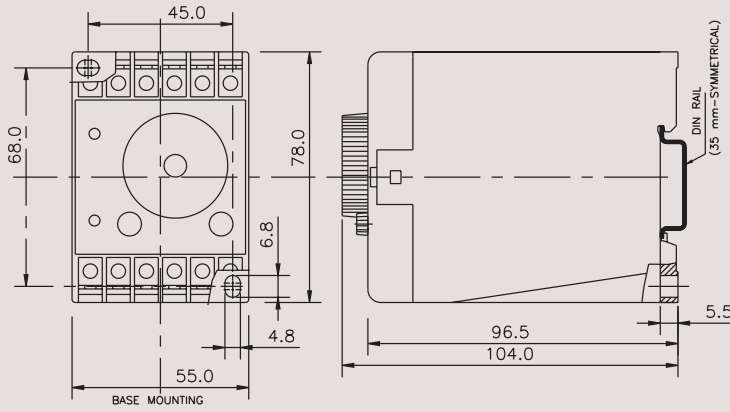

TERMINAL TORQUE & CAPACITY

	1.1 Nm (10 lb.in) Terminal screw - M3.5
	2 x 0.2...2.5 mm ² solid wire/single wire ferrule
AWG	1 x 24 to 10

CONNECTION DIAGRAM

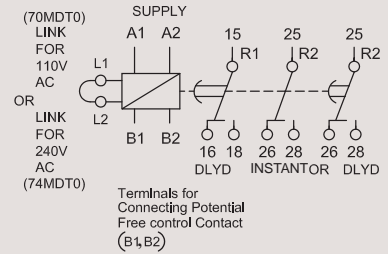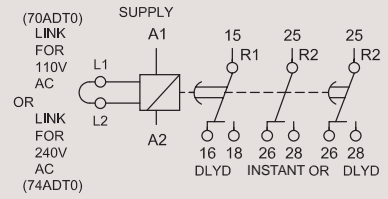

Digital Timer *Elivo*[®]

- Compact 17.5 mm
- Multi-voltage, Multi-function(8 or 17)
- 3 digit LCD for Preset time and Run time
- Option to select Up/Down counting
- Tamper proof with key lock function
- All settings accomplished with only two keys




Cat. No.		V0DDTS1, V0DDTS	V0DDTD1, V0DDTD
Parameters			
Supply Voltage (Un)		24 - 240 VAC/DC	
Operating Range		-15% to +10% of Un	
Frequency		50 - 60 Hz, + / - 2 Hz	
Power Consumption (Max.)		10 VA	
Timing Ranges		0.1s to 999h	
Repeat Accuracy		+/- 0.5% of selected range	
Relay Output		1 C/O (SPDT)	2 NO (DPST)
Contact Rating		8A (resistive) @ 240 VAC / 24 VDC	
Contact Material		Ag alloy	
Electrical Life		1x10 ⁵	
Mechanical Life		2x10 ⁷	
Switching Frequency @ rated max load		1800 Operations / h	
Utilization Category	AC - 15	Rated Voltage (Ue): - 125/240 V, Rated Current (Ie) :- 3/1.5 A	
	DC - 13	Rated Voltage (Ue): - 125/250 V, Rated Current (Ie) :- 0.22/0.1 A	
Operating Temperature		-10° C to +55° C	
Storage Temperature		-20° C to +65° C	
LED Indication		Red LED → Relay ON	
Housing		Flame Retardant UL94V0	
Dimension (W x H x D)		17.5 X 89 X 76 (in mm)	
Weight		85 g (unpacked)	
Mounting		Base / DIN rail	
Certification		CE	
Degree of Protection		IP 30 (Enclosure), IP 20 (Terminals)	
Humidity (Non - Condensing)		93% Rh	
EMI/ EMC		CISPR 14-1 Class B	
Radio Interference Suppression		IEC 61000-4-2 Level II	
ESD		IEC-61000-4-4 Level IV	
Electrical Fast Transients		IEC-61000-4-5 Level IV	
Surges		IEC-61000-4-11 (AC), IEC-61000-4-29 (DC)	
Voltage Dips, Interruptions		IEC-60068-2-6	
Vibration			


ORDERING INFORMATION

Cat. No.	Description
V0DDTS	24-240 VAC/DC, 8 Functions, 1C/O
V0DDTD	24-240 VAC/DC, 8 Functions, 2 NO
V0DDTS1	24-240 VAC/DC, 17 Functions, 1C/O
V0DDTD1	24-240 VAC/DC, 17 Functions, 2 NO

MOUNTING DIMENSION (mm)

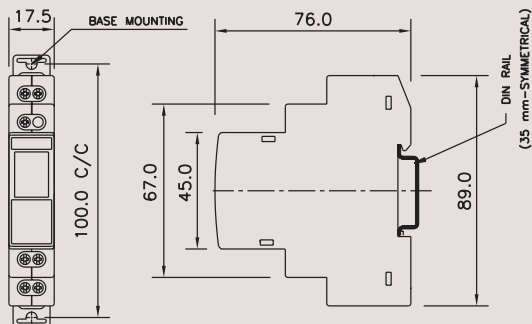

CONNECTION DIAGRAM

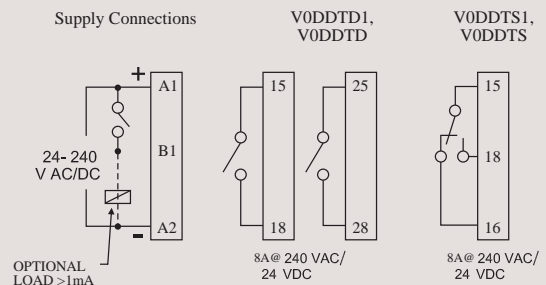


TERMINAL TORQUE & CAPACITY

Ø3.5 mm	Torque 0.54 N.m (5 Lb. in) Terminal Screw M2.5
	1 x 0.2 - 2.5 mm ² Solid Wire / single wire ferrule 2 x 0.2 - 0.5 mm ² Insulated with twin ferrule
AWG	1 x 24 to 13




FUNCTIONAL DIAGRAMS FOR V0DDTS1 & V0DDTD1

ON DELAY [0]




Timing commences when supply is present. R energizes at the end of the timing period.

SIGNAL OFF DELAY [9]




Permanent supply is required. R energizes when switch B1 is closed. Timing commences after S is opened and then the relay de-energizes.

CYCLIC OFF/ON {OFF Start, (Sym, Asym)} [1]




T-ON and T-OFF can be same or different. The relay(R) keeps on changing its status till power is removed.

IMPULSE ON/OFF [A]




Permanent supply is required. R energizes for the timing period when B1 is opened or closed. When timing commences, changing state of B1 does not affect R but resets timer.

CYCLIC ON/OFF {ON start, (Sym, Asym)} [2]




This function is quite similar to the function '1' but initially the relay(R) is ON for period T-ON after the power is applied.

SIGNAL OFF/ON [b]




When switch B1 is closed or opened for preset time T, the relay changes its state after time duration T.

IMPULSE ON ENERGIZING [3]




After power ON, R energizes and timing starts. R de-energizes after timing is over.

LEADING EDGE IMPULSE1 [C]




A permanent supply is needed. When B1 is closed, output relay energizes until timing irrespective of any further action of B1.

ACCUMULATIVE DELAY ON SIGNAL [4]




Time commences as supply is present and switch B1 is open. Closing switch B1 pauses timing. Timing resumes when switch B1 is opened again. R energizes at the end of timing.

LEADING EDGE IMPULSE2 [d]




Permanent supply is required. when switch B1 is closed, and remains closed output relay energizes until timing is over. If B1 is opened during timing, R resets.

ACCUMULATIVE DELAY ON INVERTED SIGNAL [5]




Time commences as supply is present and switch B1 is closed. Opening switch B1 pauses timing. Timing resumes when switch B1 is closed again. R energizes at end of timing.

TRAILING EDGE IMPULSE1 [E]




Permanent supply required. when B1 is opened, R energizes and de-energizes when timing is over. If B1 is closed during timing R resets.

ACCUMULATIVE IMPULSE ON SIGNAL [6]




When supply is ON, R energizes. When switch B1 is closed timing is suspended and remains suspended till switch B1 is opened again. Interrupting supply resets timer.

TRAILING EDGE IMPULSE2 [F]




Permanent supply is required. When switch B1 is opened, R energizes and will de-energize when timing is over. If B1 is pulsed during timing period it will have no effect on R.

SIGNAL ON DELAY [7]




Permanent supply required. Timing starts when switch B1 is closed. R energizes at end of timing period and de-energizes when B1 is opened.

DELAYED IMPULSE [G]



when switch B1 is closed, TOFF starts. Relay energizes at the end of TOFF period. Then, TON starts irrespective of signal level and relay de-energizes at the end of TON period.


















INVERTED SIGNAL ON DELAY [8]



Timing will commence when supply is present and switch B1 is open. R energizes after timing. If B1 is closed during timing period, timing resets to the beginning of cycle.



FUNCTIONAL DIAGRAMS FOR V0DDTS & V0DDTD

<p>ON DELAY (A)</p>	<p>P : A1-A2 </p> <p>P: Power-On operation</p> <p>S : B1 </p> <p>R : </p>
<p>CYCLIC OFF/ON {OFF Start, (Sym, Asym)} (b)</p>	<p>S : B1 </p> <p>T OFF T ON T OFF T ON</p> <p>R : </p>
<p>CYCLIC ON/OFF {ON Start, (Sym, Asym)} (C)</p>	<p>S : B1 </p> <p>T ON T OFF T ON T OFF</p> <p>R : </p>
<p>SIGNAL ON/OFF (d)</p>	<p>S : B1 </p> <p>R : </p>
<p>SIGNAL OFF DELAY (E)</p>	<p>S : B1 </p> <p>R : </p>
<p>INTERVAL (F)</p>	<p>S : B1 </p> <p>R : </p>
<p>SIGNAL OFF / ON (G)</p>	<p>S : B1 </p> <p>R : </p>
<p>ONE SHOT OUTPUT (H)</p>	<p>S : B1 </p> <p>R : </p>

Note: 1. For Power-On operation (P) connect the terminal B1 to A1 permanently.
 2. If the Signal (S) changes during the Timer Duration (T), it does not change the output relay but re-triggering takes places and the Timer Duration is extended.


Synchronous Timer - Series EM 1000

- Time delay is independent of normal voltage and temperature fluctuations
- Black pointer gives clear indication of time set on a calibrated dial while the red one indicates the time left to complete the cycle
- Automatic reset on de-energisation of the clutch coil
- Base mounting or flush mounting versions
- No-volt feature is available




Mode	On - Delay	On - Delay (Retentive / No Volt)
Functional Diagram	<p>S = Supply, R = Relay, T = SET TIME</p>	<p>T = t1 + t2 + t3</p>
Supply Variation	- 20% to 10%	
Frequency	95% - 105%	
Nominal Consumption	10 VAC Max.	
Timing Range	0.15 s to 120 h	
Repeat Accuracy	± 0.5% of FSR at constant Frequency	
Contact Rating	1 Inst + 1 delayed - AgCdO 1 Inst + 2 delayed - AgCdO (Optional) 6A (resistive) @ 250 VAC 3000 operations/hr. (Max.)	
Switching Frequency	3000 operations/hr. (Max.)	
Operating Temp.	- 5°C to + 45°C	
Housing	Conforms to IP30 - IS 13947.	
Dimension (W x H x D)	96 X 96 X 100 (in mm)	
Weight	530 g (unpacked)	
Mounting	Flush & Base	
Terminal Connection	1- 2.5 mm ² solid/ stranded	
Protection	IP20	


ORDERING INFORMATION

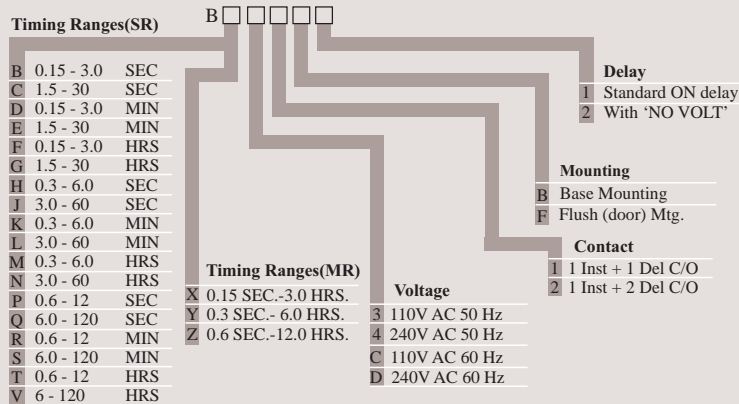


WIRING DIAGRAMS OF SERIES EM1000

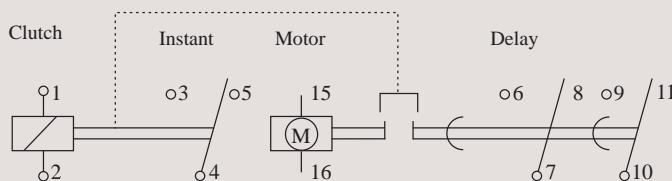



MOUNTING DIMENSION (mm)



Note : Panel Cutout 91mm Dia.



BASE MOUNTING



Synchronous Timer - Series EM 2000

- Time delay is independent of normal voltage & temp fluctuations
- Large knob operating on a linear scale makes time setting easy
- Set time is indicated by a fixed pointer of the setting knob.
Time left for completion of cycle is indicated by red pointer
- Wiring is quicker and easier as terminals are in the front of the unit
- All part subjected to wear & tear are made of 'Delrin' which has high resistance to wear & tear and thus ensures longer life.




Mode	On - Delay
Functional Diagram	<p>S = Supply, R = Relay, T = SET TIME</p>
Supply Variation	- 20% to 10%
Frequency	95% - 105%
Timing Range	1 s to 120 s
Accuracy :	
Repeat Accuracy	± 2% of Full Scale Range at constant Frequency
Contact Rating	1 delayed - AgCdO 2 delayed - AgCdO (Optional) 5A (resistive) @ 250 VAC
Switching Frequency	1000 operations / hr. (Max)
Operating Temp.	-5°C to 45°C
Housing Dimension (W x H x D)	Conforms to IP30 - IS 13947. 55 X 88 X 106 (in mm)
Weight	260 g (unpacked)
Mounting	Base/DIN Mounting & can be mounted on vertical plane with maximum inclination of 15° from vertical.
Terminal Connection	1 – 2.5 mm ² solid/stranded.
Protection	IP20

ORDERING INFORMATION

Timing Ranges	Voltage	Contact
C 1.0 - 30 Sec	3 110V AC 50 Hz	5 1 Del C/O
J 2.0 - 60 Sec	4 240V AC 50 Hz	6 2 Del C/O
Q 4.0 - 120 Sec	5 415V AC 50 Hz	


WIRING DIAGRAMS OF SERIES EM2000

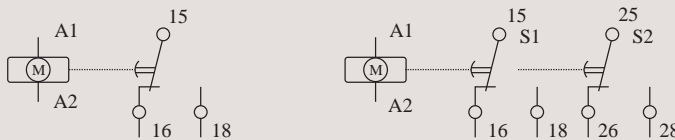

Note : Switch 2 operates before switch 1

MOUNTING DIMENSION (mm)

BASE/DIN MOUNTING

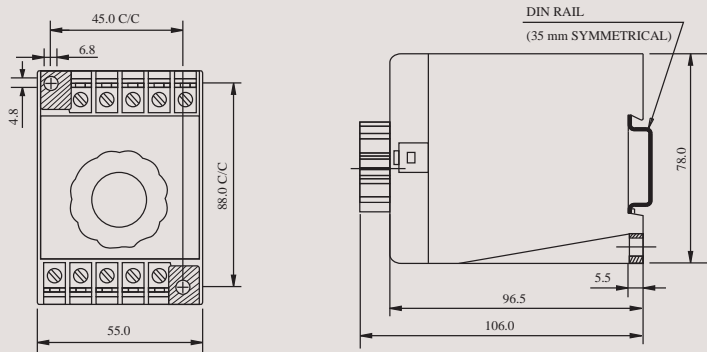

Operating Voltage:
Input Supply required for operation.

Supply Variation:
Allowable variation in input power supply for satisfactory operation.

Delayed Contacts:
A contact in a timer that changes state at the end of time you have set.

Instantaneous Contact:
A contact that changes state as soon as power is switched on to the timer.

Electrical Life:
The number of operations that the connect can be expected to make or break at the rated electrical load.

Reset Time:
Time taken by the timer to start a new cycle.

Repeat Accuracy:
It indicates how consistently the device will repeat the time. It is more important where uniform processing time cycles are required.

Rated Current:
A current that can flow continuously through the closed contact.

Contact Rating:
Voltage and current, which can switch under specified conditions.


Ambient Temperature:
Temperature surrounding the product.

Power Consumption:
Power absorbed by the unit for its own satisfactory functioning.

Mounting:
The type of placement of the unit (Base/Din/Flush).


No-volt protection (Retentive Timer):
Timers are available with retention ensuring that elapsed time is not cancelled when the supply is interrupted during the timing cycle.

MULTIFUNCTIONAL

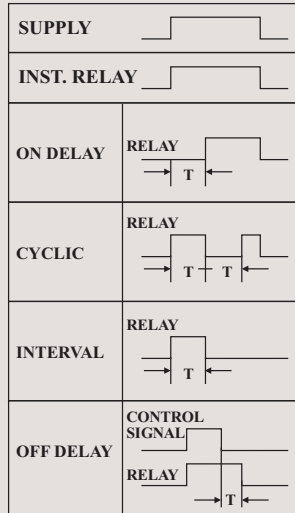


- **Delay on Energisation (ON Delay):** The set time (Delay) start when timer receives supply. The output relay energises at the end of the pre-set time
- **Cyclic Instant (Equal ON/OFF):** On energisation, relay output is on and off repeatedly for the set time. Cycle starts with relay in energised condition. By removing supply, the relay gets reset.
- **Interval Timer:** On energisation of Timer, Output relay changes the state for the time set. After completion of set time, output relay de-energises. By switching off supply, the Timer gets de-energised & is ready for the next cycle of the operation.
- **(Signal)-Off delay:** Timer is energised and relay is in Off condition. When control input is given through control contacts, relay is energised. Delay period commences when control input is removed. At the end of set time, relay is de-energised and load is disconnected.

STAR - DELTA




- **Star - Delta:** The timer has a fixed transition time from Star to Delta connections. On energisation, the output star relay energises instantly. After completion of preset delay time, output Delta relay energises after fixed pause time. This pause time (60, 90, 120, 150 ±20 ms) provides the shortest possible 'current off' pause and simultaneously ensures smooth change over.

ASYMMETRICAL ON/OFF




- **Asymmetrical ON/OFF (Cyclic Instant):** ON/OFF, can be independently selected from 0.1 Sec. to 10 Hrs. On energisation, relay output is on and off repeatedly for the respective set times. Cycle starts with relay is energised condition. By removing supply, the relay gets reset.

TRUE OFF DELAY



- **True Off Delay:** On energisation the Relay O/P is in ON Position. Timing delay period commences when supply to the true off delay Timer goes OFF. The O/P Relay de-energises at the end of pre-set time.

ON DELAY (RETENTIVE/NO VOLT)



- **On Delay (Retentive):** The set time (Delay) starts when timer receives supply. The output relay energises at the end of the pre-set time. If power fails during set time, the elapsed time will be retained by timer. Upon resumption of power, remaining cycle will continue.

TIME SWITCHES

Time Switch FM Series

Digital Time Switch *Crono™ & Pulse*

Astronomical Time Switch *Astro™*

Lighting Automation with *Astro™* Using GSM Technology

INTERNATIONAL APPROVALS:



Time Switch FM Series

- Modular construction
- Inbuilt over-ride facility
- High switching capacity
- Tamper proof sealing
- Analog & Digital version
- Daily/Weekly programming
- Graphical Program LCD



Cat. No.	J648B1 (Analog Version)	D847B2 (Digital Version)
Parameters		
Supply Voltage & Frequency	240 VAC, 50/60 Hz	
Power Consumption	2 VA	4.4 VA
Accuracy	± 1.5 s/day at 20°C	± 1 s/day at 20°C
Switching contact	1 C/O contact - AgCdO	
Contact Rating		
- Resistive	16A @ 250 VAC, 0.25A @ 220VDC	16A @ 250 VAC
- Inductive (cosφ = 0.6)	8A @ 250 VAC, 0.1A @ 220 VDC	4A @ 250 VAC
- Incandescent Lamp	1350 W	1350 W
Shortest Switching Time		
- Daily	15 m	1 m
- Weekly	2 h	1 m
Power reserve	150 h	10 years from Factory at 20°C
Memory locations	NA	20
Ambient Temperature	- 20°C to + 55°C	
Manual Over-ride	Provided	
Mounting	Flush, Base / DIN rail	
Weight	185 g (unpacked)	

ORDERING INFORMATION

Cat. No.	Description	
J648B1	FM/1 QT	Daily dial, 240 VAC, Base / DIN Mounting
J848B1	FM/1 QW	Weekly dial, 240 VAC, Base / DIN Mounting
J638B1	FM/1 QT	Daily dial, 110 VAC, Base / DIN Mounting
J838B1	FM/1 QW	Weekly dial, 110 VAC, Base / DIN Mounting
D847B2	FM/1 Digi20 Plus	Weekly / Daily, 240 VAC, Base / DIN Mounting

Note: For Flush Mounting model replace B by F in Cat. No.




TIME SETTING:

Turn the switching Dial in clockwise direction until the current time (day / time incase of weekly model) and is almost opposite to the marking arrow F. For fine adjustment turn the minute hand in the clockwise direction until the clock shows the current time.


PROGRAMMING:

Required Switch ON time is set on the Switching Dial by radially pulling outwards the corresponding black segments. Each segment on daily dial corresponds to 15 mins. & on weekly Dial corresponds to 2 hours.

MOUNTING DIMENSION (mm)




Base Mounting



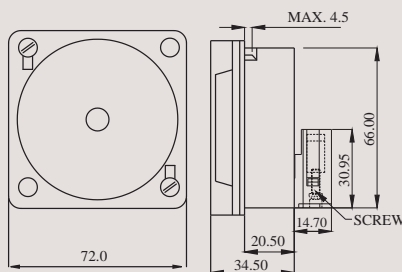


Flush Mounting

CONNECTION DIAGRAM

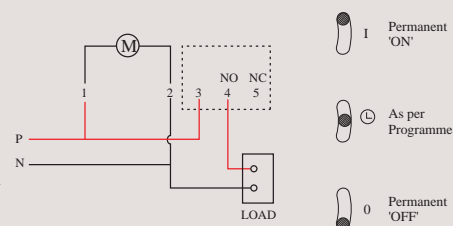

TERMINAL TORQUE & CAPACITY

 Ø 4.0 mm	Torque 1.1 N.m (10 Lb. in) Terminal Screw - M 3.5
	1 x 0.2 - 5 mm ² Solid Wire / single wire ferrule
	2 x 0.2 - 2.5 mm ² Insulated with twin ferrule
AWG	1 x 24 to 10

Digital Time Switches *Crono™* & *Pulse*


- Precise time programming for Daily/Weekly/Pulse switching
- Simple Reset
- Weekend and Weekly OFF programming
- LED indication of Relay status
- 12/24 h display formats
- 6 years battery reserve
- Manual override



Cat. No.	67DDT0 (<i>Crono™</i>)	67DDT9 (<i>Pulse</i>)
Parameters		
Supply Voltage & Frequency	110 - 240 VAC, -20 % +10%, 50 / 60 Hz	
Number of Modes & it's description	Five <ul style="list-style-type: none"> • AUTO - Program Run • ON AUTO - Instant ON up to next ON Program • AUTO OFF - Instant OFF up to next OFF Program • ON - Continuous ON • OFF - Continuous OFF 	Three <ul style="list-style-type: none"> • AUTO - Program Run • ON - Continuous ON • OFF - Continuous OFF
Memory Locations	8 On / Off operations, 16 memory locations	16 Pulse operations (Ex - 0,1,2,3,4,5,6,7,8,9, a, b, c, d, e, f)
Minimum Switching Time	1 m	1 to 59 s Pulse Time (Same or Different)
Power Consumption	6 VA (Approx)	
Operating Temperature	-10°C to + 55°C	
Storage Temperature	-10°C to + 60°C	
Clock Accuracy	± 1 s/day max. over the Operating Temperature range	
Power Reserve (Battery backup)	6 Years running reserve	
Switching Contact (Relay Output)	1 C/O (SPDT)	
Shortest Switching Time	1 m (For Crono) & 1 s (For Pulse)	
Contact Rating	Resistive: - 16A @ 240 VAC / 28 VDC Inductive (cos φ = 0.6) :- 6 A @ 250 VAC Incandescent Lamp: - 1000 W	
Electrical Life	3x10 ⁵	
Contact Material	Ag Alloy	
Mechanical Life	50 X 10 ³	
LED Indication	Red → Relay ON	
Housing Dimension (W x H x D)	Flame Retardant UL94V0 36 X 65 X 90 (in mm)	
Weight	120 g (unpacked)	
Mounting	Base / DIN rail	
Protection	IP20	
Certification	CE	
EMI/ EMC		
Radio Interference Suppression	CISPR 14-1 Class B	
ESD	IEC 61000-4-2 Level III	
Electrical Fast Transients	IEC 61000-4-4 Level IV	
Surges	IEC 61000-4-5 Level IV	
Voltage Dips & Interruptions	IEC 61000-4-5 Level III, Conducted Emission- IEC 61000-4-11 Class B	
Applications	Ideal for Lighting applications like street lighting, advertising displays. Also can be used for Air conditioners / Coolers, Geysers, conveyors, pumps etc.	Ideal for Siren, School bell application

ORDERING INFORMATION

Cat. No.	Description
67DDT0	110 - 240 VAC (50/60 Hz), 1 C/O (SPDT)
67DDT9	110 - 240 VAC (50/60 Hz), 1 C/O (SPDT)



TIME & DAY SETTING:

Press RST key. Press key & keep it pressed. Then press D+ key to set running day. Press H+ key to set running hour & press M+ key to set running Minute.
Mode - To set a mode press MAN key

PROGRAMMING:

To set a program - Press PRG key.
Set 1 ON time, day, then 1 OFF time, day with the help of D+, H+ & M+ keys.
Like this we can set another 8 ON & 8 OFF programs.

PROGRAMMING:

To set a program - Press PRG key.
(a) If pulse is common or the same, set pulse before the ON time (b) If pulse time is different for different programs, set the ON time first and then set different pulse values for each programme

Astronomical Time Switches *Astro*TM


- Dynamic and accurate control based on astronomical mathematics
- Yearly programming with season mode, DST, Offset, Off hours enabled
- Protection against under voltage and over voltage
- Active Phase selection & Auto load changeover feature
- Three independent channel outputs
- Manual override facility
- Single phase and three phase versions




Cat. No.	T2DDT0	T3DDT0
Parameters		
Supply Voltage	110-240 VAC, 50/60Hz	110-240 VAC 3 Phase 4 wire (P-N), 50/60Hz
Supply Variation	-20% to +15%	
Power Consumption	8VA @ 300 VAC	
Storage Temperature	-10°C to + 60°C	
Operating Temperature	-10°C to + 50°C	
Switching contacts	2 NO, 8A (resistive load) @ 240 VAC and 5A (resistive load) @ 30 VDC	3 NO, 8A(resistive load) @ 240 VAC and 5A (resistive load) @ 30 VDC
Shortest switching time (daily)	1 m (1 s for pulse)	
Power reserve (for clock only)	1000 h	
Clock deviation	± 1 s per day over the operating temperature range	
DST	settable	
Mounting	Base / DIN rail	
Dimensions (W x H x D)	72 X 90 X 67 (in mm)	
EMI/ EMC		
Radio Interference Suppression	CISPR 14-1 Class B	
ESD	IEC 61000-4-2 Level III	
Electrical Fast Transients	IEC 61000-4-4 Level IV	
Surges	IEC 61000-4-5 Level IV	
Voltage Dips & Interruptions	IEC 61000-4-11 All 7 Levels	
Certification	CE	
Weight	190 g (unpacked)	208 g (unpacked)

ORDERING INFORMATION


Cat. No.	Description
T2DDT0	110-240 VAC, 1 Phase, 2 NO (SPST)
T3DDT0	110-240 VAC, 3 Phase 4 wire (P-N), 3 NO (SPST)
TGDDT6	Windows based application software for Astro
GFDNN3M	Memory card
GFDNN2S	Serial interface cable
GFDNN1	USB interface cable



Screen No. 1



Screen No. 2



Screen No. 3



Screen No. 4

TIME & DAY SETTING :

- 1) Power ON the Astro. The screen No.1 will appear.
- 2) Press ESC key.
- 3) Set the cursor on "SETTINGS" with help of Z keys and press OK.
- 4) Set the cursor on "CLOCK" with help of Z keys and press OK.
- 5) Set the cursor on "DATE / TIME" with help of Z keys and press OK. Then screen No.2 will appear.
- 6) Press Z1 or Z3 key to locate the cursor at "DAY" parameter position. Then press "ALT" key to edit the value of Day. When user presses this key, the upper digit of the Day parameter start blinking as to show it is selected. Press Z2 or Z4 key to increment or decrement the value of digit under edit. Press Z1 or Z3 key to select next digit of the parameter. Now again press Z2 or Z4 key to increment or decrement the value of digit. If required value of the Day has edited then press OK key to set it & come on the screen No. 1 by pressing the ESC key.
- 7) Similarly select other individual parameters and modify them as per your requirement & save it as per the above given process.

LATITUDE & LONGITUDE :

- 1) Go to menu by pressing "ESC" key
- 2) Set the cursor on "SETTINGS" with help of Z keys and press OK
- 3) Go to "LAT/LONG" using Z2 Key. Then screen No. 3 will appear.
The cursor blinks at E. Press ALT Key to go into edit mode.
Change the direction using Z2 or Z4 key once the required direction is set press ALT to set the direction. Jump to next character using either Z1 or Z3 key.
Press ALT again to enter into edit mode When user presses this key, the digit starts blinking.
Press Z2 or Z4 key to increment or decrement the value of digit under edit.
Press Z1 or Z3 key to select next digit of the parameter.
Now again press Z2 or Z4 key to increment or decrement the value of digit.
If the required value of latitude longitude has been edited then press OK key to save it.

TIME ZONE



- 4) Go to "CLOCK" and Press OK.
- 5) Select "TIME ZONE" and Press OK. Then screen No.4 will appear.
- 6) In the screen No. 4, edit sign, hour & minute as per your requirement. Then press OK to save the changes & & come on the screen No. 1 by pressing the ESC key.

Astronomical Time Switches *Astro*TM


Digital Time Switches *Crono*TM & *Pulse*

MOUNTING DIMENSION (mm)


For: T2DDT0 & T3DDT0

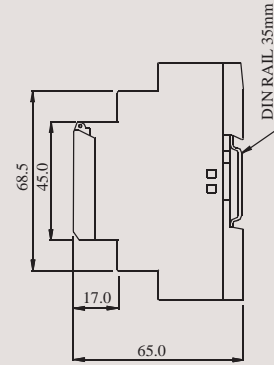

CONNECTION DIAGRAM

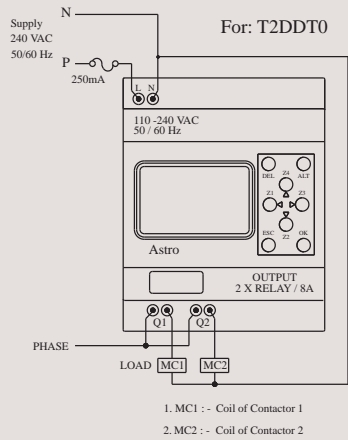



- 1. MC1 :- Coil of Contactor 1
- 2. MC2 :- Coil of Contactor 2

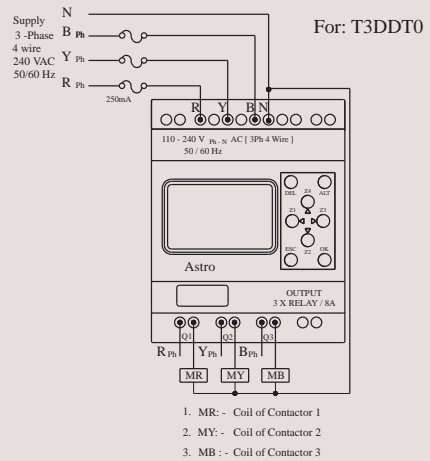


- 1. MR: - Coil of Contactor 1
- 2. MY: - Coil of Contactor 2
- 3. MB: - Coil of Contactor 3

*Crono*TM & *Pulse*



MOUNTING DIMENSION (mm)



CONNECTION DIAGRAM

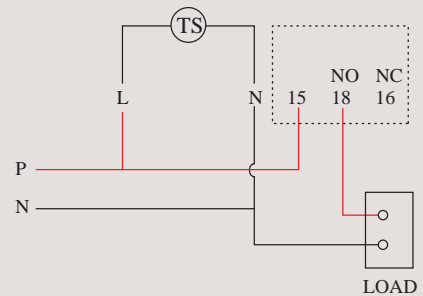

TERMINAL TORQUE & CAPACITY

 Ø 3.5 mm	Torque 0.54 N.m (5 Lb. in) Terminal Screw - M 2.5
	1 x 0.2 - 3.3 mm ² Solid Wire / single wire ferrule 2 x 0.2 - 1 mm ² Insulated with twin ferrule
AWG	1 x 24 to 12

Lighting Automation with *Astro*[™] using GSM Technology

- Most of the "ASTRO" parameters can be set remotely using SMS queries. I.e. Output mode, Offset Hrs etc, UV, OV settings.
- Relay Output can be override remotely using SMS query.
- Energy Meter Functionality. Parameter like Load current, Supply voltage, Power, Energy can be known remotely.
- With the help of "Auto Error Code Update" following onsite error can be know remotely during output event.
 - Under Voltage
 - Over Voltage
 - Over Current
 - Output actuator short.
 - Load Open



Cat. No.	19D20B00	19D20A00	19C20C00
Parameters			
Supply voltage range	110-240 VAC 3 Phase 4 wire (P-N), 50/60Hz		110-240 VAC, 50/60 Hz
Supply variation	-30%, +25%		
Active phase selection	Yes		
Operating temperature range	-15°C to + 60°C		
GSM Type	Dual band 900 / 1800 GSM		
GPRS packet data	Class 10 coding scheme		
AT command set	Yes		
Suitability	NA	NA	GSM 7.05 & 7.07
SMS type functionality	Data Call through GSM, SMS		
SIM Holder	Text, Cell Broadcast		
Antenna	Connected with the product		
Antenna Impedance	50 Ω		
Energy Measurement	Yes		No
Energy Measurement Accuracy	Class 0.5		
Current sensing range	5A	1A	NA
CT ratio	Settable up to 40		
LED Indications	Tx, Rx, Network, Power, Pulse Out		Tx, Rx, Network, Power, SIM Status
Pulse Out rate	3200 pulses / kWh		
Auxiliary Output	12 V DC, 300 mA		
General Port Connectivity	TTL port for connecting Time-switch (Astro) USB through USB interface cable GFDNN1, RS232 through serial interface GFDNN2S, RS485 through TTL-RS485 converter G7XDTR4"		
Mounting	DIN / Base		
Enclosure	4 Module		
Colour	RAL 7016		
Dimension (W x H x D)	72 X 90 X 67 (in mm)		
Weight	190 g (unpacked)		
Certification			
EMI/ EMC	IEC 61000-3-2 Ed. 3.0 (2005-11) Class A		
Harmonic Current Emission	IEC 61000-4-2 Ed. 1.2 (2001-04) Level II		
ESD	IEC 61000-4-3 Ed. 3.0 (2006-02) Level III		
Radiated Susceptibility	IEC 61000-4-4 Ed. 2.0 (2004-07)		
Electrical Fast Transients	IEC 61000-4-5 Ed. 2.0 Level IV		
Surge	IEC 61000-4-6 Ed. 2.2 (2006-05) Level III		
Conducted Susceptibility	IEC 61000-4-11 Ed. 2.0 (2004-03) All seven levels		
Voltage Dips and Interruptions	CISPR 14-1 Ed. 5.0 (2005-11) Class A		
Radiated Emission			

Note:

1. ERT5 & ERT1 can measure maximum 5A & 1A current respectively.

2. Maximum current measurement limit for ERT-5 is 200A & for ERT-1 it is 40A.

Ex: 1. For CT selection if current required to be measured upto 200A then CT of 200:5 A (CT ratio 40) need to be used.

2. For CT selection if current required to be measured upto 40A then CT of 40:1 A (CT ratio 40) need to be used.

ORDERING INFORMATION


Cat. No.	Description
T3DDT0	Astro time switch, 110-240 VAC 3 Phase 4 wire (P-N), 50/60Hz, 3 NO (SPST)
19D2000C	Surge Suppressor
19D20B00	Astro GSM Module (GSM-ERT5), Remote Side
19D20A00	Astro GSM Module (GSM-ERT1), Remote Side
19C20C00	Astro GSM Module (GSM-RT), PC side
19A1000B	Communication Cable (TTL-TTL) between Astro & GSM Module
TGDDT6	Windows based application software for Astro

Lighting Automation with *Astro*™ using GSM Technology




- Maximum 5 valid users can access the system remotely, using GSM functionality.
- To avoid Remote module's SIM theft, "SIM PIN" facility can be enabled remotely using SMS query.
- To avoid changes in system configuration by unauthorized user amongst valid users, important SMS queries are provided with "MODULE PIN" lock.
- Device supports for 12 to 14 digit mobile number. i.e. (10 Digit Mobile number + 2/3/4 digit country code).

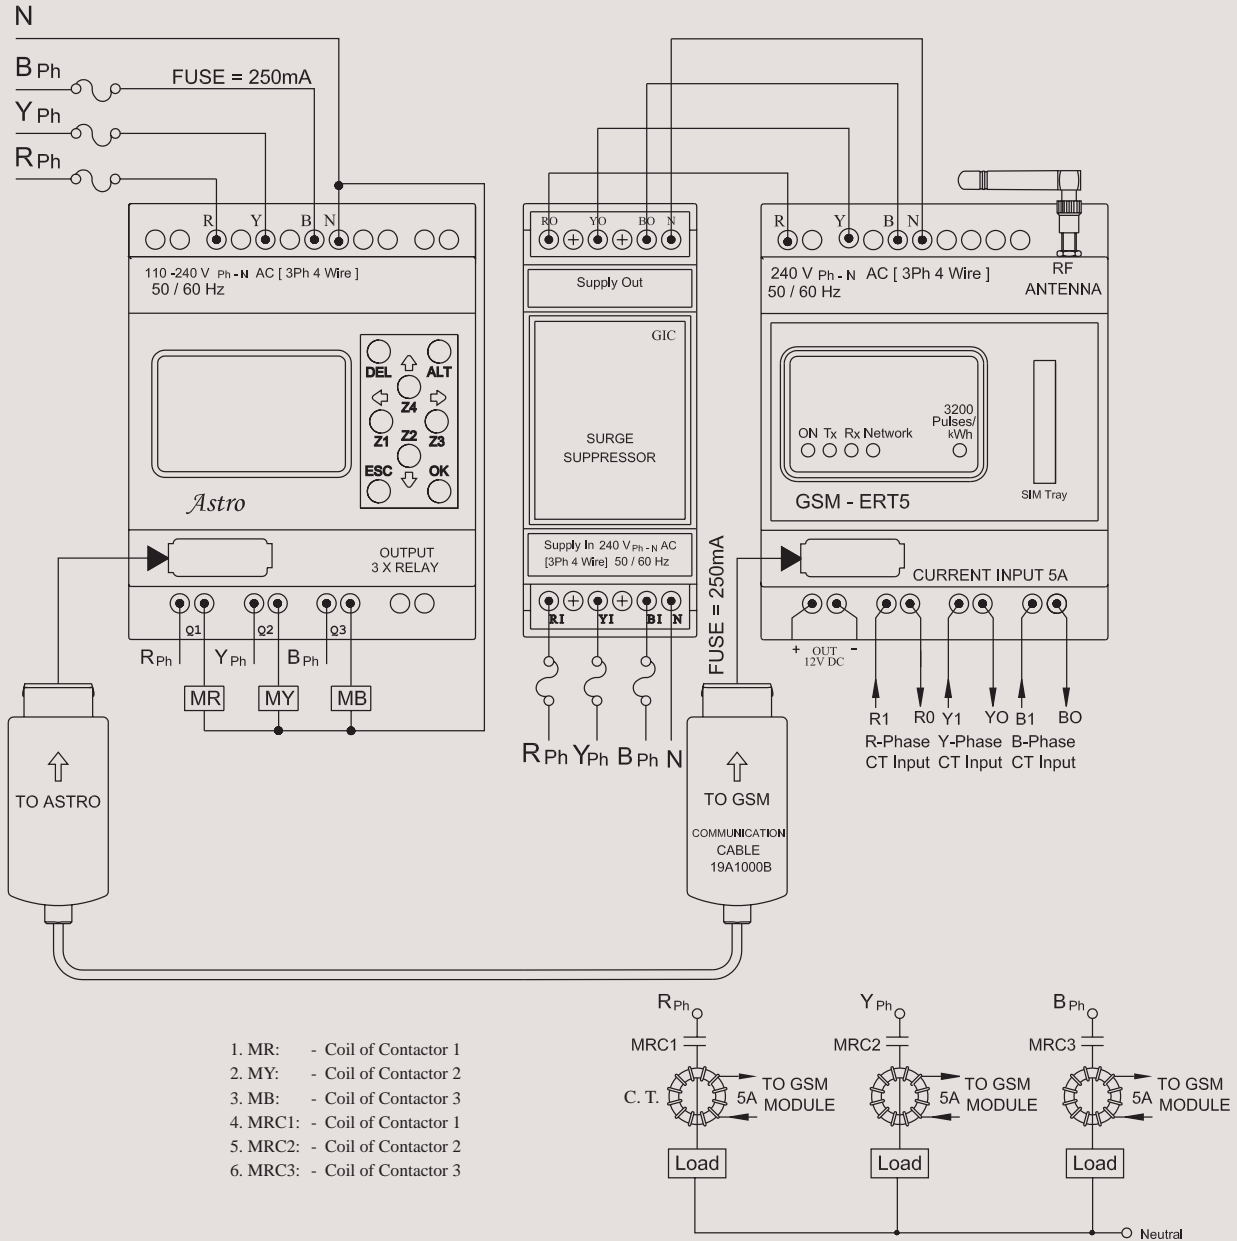

CONNECTION DIAGRAM



TERMINAL TORQUE & CAPACITY

 Ø 3.5 mm	Torque 0.54 N.m (5 Lb. in) Terminal Screw - M 2.5
	1 x 0.2 - 3.3 mm ² Solid Wire / single wire ferrule
	2 x 0.2 - 1 mm ² Insulated with twin ferrule
AWG	1 x 24 to 12

OUR METERS & COUNTERS

Hour Meter Series HM 36

Hour Meter Series HM 48

Digital Hour Meters

Impulse Counter Series CR 26

Digital Counters

INTERNATIONAL APPROVALS:



Hour Meter Series HM36

- Robust design with high degree of accuracy and compact size
- Frequency independence for AC applications
- Indicates operating time in hours and tenths with running indicators
- Totally sealed from dust and moisture
- Panel mountable with 7 bezel options
- Non-resettable
- 6 digit version with automatic recycle to zero
- Wide supply voltage range: 4-30V AC/DC, 10-80V DC & 90-264V AC



Cat. No.	AC Model HM36	DC Model HM36	AC/DC Model HM36
Parameters			
Supply Voltage & Frequency	90-264 VAC, 50/60 Hz	10-80 VDC	4-30 VAC / DC, 50/60 Hz
Over Voltage & reverse polarity protection	-----	Protected for 2 times battery voltage and / or reverse polarity	Not applicable to AC and 48V for DC Application
Power Consumption	0.5 VA (Max)	0.25 VA (Max)	1 VA (Max)
Register	6 Digit (3.6mm)		
Read Out	99999.9		
Least Count	1/10 h		
Accuracy	± 0.02% over entire range		
Vibration	10-80Hz with 20g max(SAE 1378)		
Shock	55g @ 9-13ms (SAE 1378)		
Weight	47g (unpacked)		
Temperature	-40° C to +85° C		
Humidity (Not condensive)	95%Rh (SAE J1378)		
Mounting	Panel		
Termination	¼" [6.3] spade terminal		
Approvals	e _{NEC} US SAE & NEMA 4X (Equivalent to IP65) CE		SAE & NEMA 4X (Equivalent to IP65)

ORDERING INFORMATION

Cat. No.	Description
LA21F1	90-264 VAC, Rectangular Bezel
LA22F1	90-264 VAC, Rectangular 2 holes Bezel
LA23F1	90-264 VAC, Round Bezel
LA24F1	90-264 VAC, Round 3 holes Bezel
LA25F1	90-264 VAC, Square Mount Bezel
LD11F1	10-80 VDC, Rectangular Bezel
LD12F1	10-80 VDC, Rectangular 2 holes Bezel
LD13F1	10-80 VDC, Round Bezel
LD14F1	10-80 VDC, Round 3 holes Bezel
LD15F1	10-80 VDC, Cup Mount Bezel
LD16F1	10-80 VDC, Stirrup Mount Bezel
LD17F1	10-80 VDC, Square Mount Bezel
LC31F1	4-30 VAC/DC, Rectangular Bezel
LC32F1	4-30 VAC/DC, Rectangular 2 holes Bezel
LC33F1	4-30 VAC/DC, Round Bezel
LC34F1	4-30 VAC/DC, Round 3 holes Bezel
LC35F1	4-30 VAC/DC, Cup Mount Bezel
LC36F1	4-30 VAC/DC, Stirrup Mount Bezel
LC37F1	4-30 VAC/DC, Square Mount Bezel

VIEWS OF DIFFERENT BEZELS



Rectangular Bezel



Rectangular 2 holes Bezel



Round Bezel



Round 3 holes Bezel



Cup Mount Bezel




Stirrup Mount Bezel

Hour Meter Series HM36




MOUNTING DIMENSION (mm)


Square Mount Bezel (45 x 45 Panel Cutout)



Round Bezel & Round 3 holes Bezel

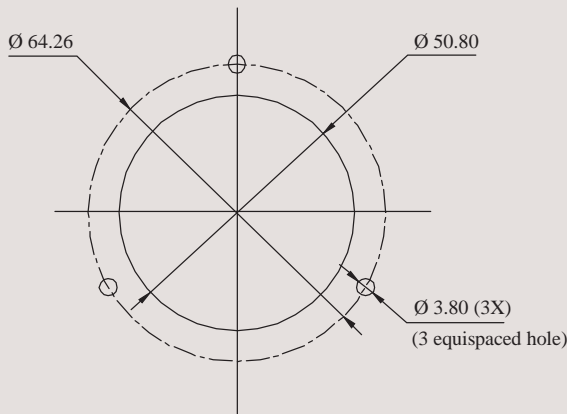


Rectangular Bezel

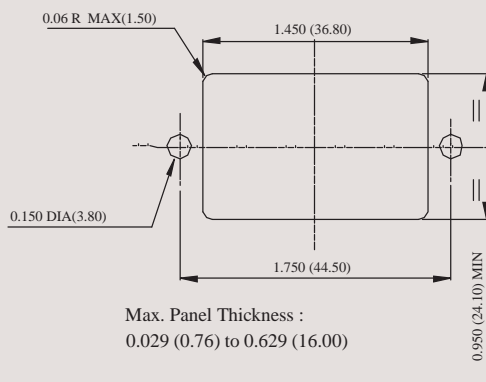


CONNECTION DIAGRAM

For : DC Series

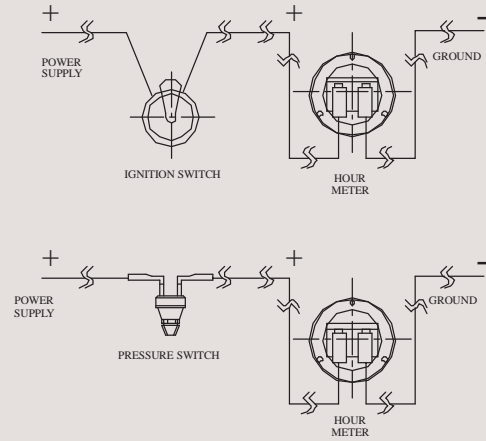

For : AC Series

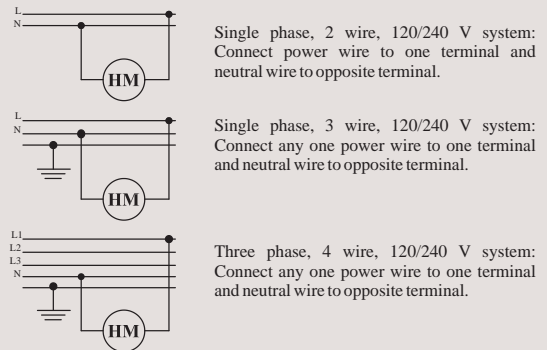

Caution
Tighten terminals with flat head screwdriver with tip size 4.3 x 0.6 mm.

Hour Meter Series HM48

- Synchronous motor based
- Compact
- 7 digits (with 2 decimal)
- Maintenance free
- Versatility in mounting
- International design




Cat. No.	K54SF1
Parameters	
Supply Voltage	240V AC, 50Hz
Supply Variation	-20% to +10%
Drive	Synchronous Motor
Consumption	~ 1VA
Register	7 Digital (2 Decimal)
Read out	99999.99
Least count	1/100 h
Accuracy	Directly proportional to supply frequency
Vibration	10 to 2000 Hz with 0.5 g
Protection weight	IP20 70 g (unpacked)
Ambient Temperature	-20°C to +55°C
Mounting	Flush / Base

ORDERING INFORMATION


K 5 □ S □ 1	
Voltage	Mounting
1 24VAC 50Hz	B Base Mounting
3 110VAC 50Hz	F Flush Mounting
4 240VAC 50Hz	

WIRING DIAGRAM




MOUNTING DIMENSION (mm)

HM48
FLUSH MOUNTING



BASE MOUNTING



Digital Hour Meters

- 6-digit LCD
- Exceptional reliability in-built nonvolatile memory (EEPROM)
- Wide range of supply voltage
- Remote reset
- Available in 3 different shaped Bezels




Cat. No.	Z71FBX	ZJ1FBX	ZH1FBX
Parameters			
Supply Voltage (Un)	85-265 VAC 50/60 Hz	12-48 VAC/DC 50/60 Hz	10-80 VDC
Power Consumption	0.8 VA	0.4 W	0.6 W
Range	99999.9 h		
Display	6-digit LCD 5mm Height		
Resolution	1/10 h		
Accuracy	± 0.02%		
Memory Retention	100 Years		
Operating Temperature	-10° C to +50° C		
Storage Temperature	-20° C to +65° C		
Humidity	95% Rh		
Protection Class	IP54 (for front side only)		
Housing	UL94V0		
Terminals	1, 2: Input Supply, 3: Enable 4: Reset		
Panel cut outs	Round Bezel, 24 x 48 Bezel, Screw Mount Bezel		
Mounting	Flush/ Panel Mounting		
Certification	CE		
Weight	with Round Bezel- 35g, with 24 x 48 Bezel- 29 g, with Screw Mount Bezel- 31 g (Unpacked)		
EMI/ EMC	CISPR 14-1 Class B		
Radio Interference Suppression	IEC 61000-4-2 Level III		
ESD	IEC 61000-4-4 Level IV		
Electrical Fast Transients	IEC 61000-4-5 Level IV		
Surges	IEC 61000-4-11 (AC), IEC 61000-4-29 (DC)		
Voltage Dips & Interruptions			

ORDERING INFORMATION

Cat. No.	Description
Z71FBX	85-265 VAC model
ZJ1FBX	12-48 VAC/DC model
ZH1FBX	10-80 VDC model
X	A=Round Bezel, B=24x48 Bezel, C=Screw Mount Bezel


MOUNTING DIMENSION (mm)

Round bezel

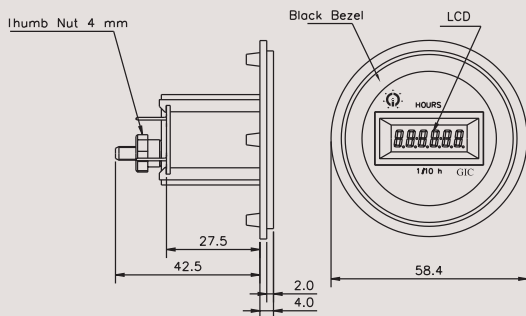


Recommended Panel Cutout :
37.0 (+0.5)mm x 24.6 (+0.5)mm

24x48 bezel

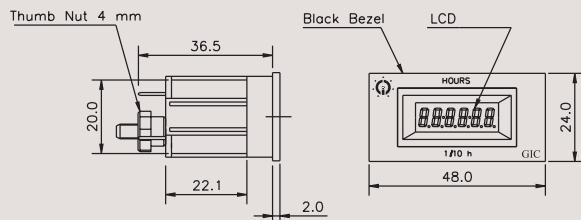


Recommended Panel Cutout :
45.5 (+0.5)mm x 23.0 (+0.5)mm

Screw mount bezel

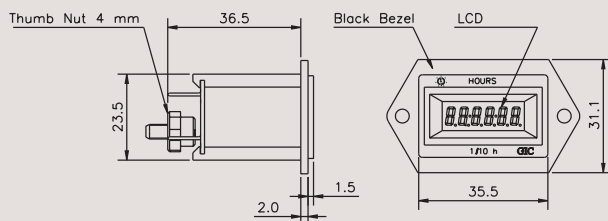

Recommended Panel Cutout :
37.0 (+0.5)mm x 24.6 (+0.5)mm

CONNECTION DIAGRAM



TERMINAL DESCRIPTION

- Pin 1: Supply (~ / +)
- Pin 2: Supply (~ / -)
- Pin 3: Enable
- Pin 4: Reset

Impulse Counter Series CR 26

- 6-digit Compact and Robust Design
- Push-button quick reset
- High Accuracy and Reliability
- Requires no lubrication or maintenance
- Optional locking for reset button
- Ideal where space is limitation
- Three mounting options: Bail, Panel, Base




Cat. No.	SD23A	SD33A	SA43A	SA53A
Parameters				
Supply Voltage Un (+10% to -15%)	12 VDC	24 VDC	115 VAC	230 VAC
Power Consumption	3 Watts (Approx.)		2 Watts (Approx.)	
Figure	6 Digit, White on Black, (4.0 mm) Height			
Maximum Read Out	999999			
Operating Life	Beyond 100 million counts			
Speed	10 Hz Maximum			
Pulse Width	50 ms minimum			
Counting Method	One Pules - One count (energizing - 1/2 count, de-energized - 1/2 count)			
Continuous Energizing	Permissible			
Reset	Manual push button Reset (Reset button can be locked or sealed to avoid accidental reset.)			
Weight	142 g (unpacked)			
Operating Temperature	- 26° C to + 60° C			
Termination	22 AWG, 105° C wire leads, 254 mm long			
Certification	CE			

Note: Do not reset push button during change over.

Applications
 Ideal for use in -
 Machine tools, Business Machines, Test Instruments,
 Amusement Instruments and Measuring devices


ORDERING INFORMATION

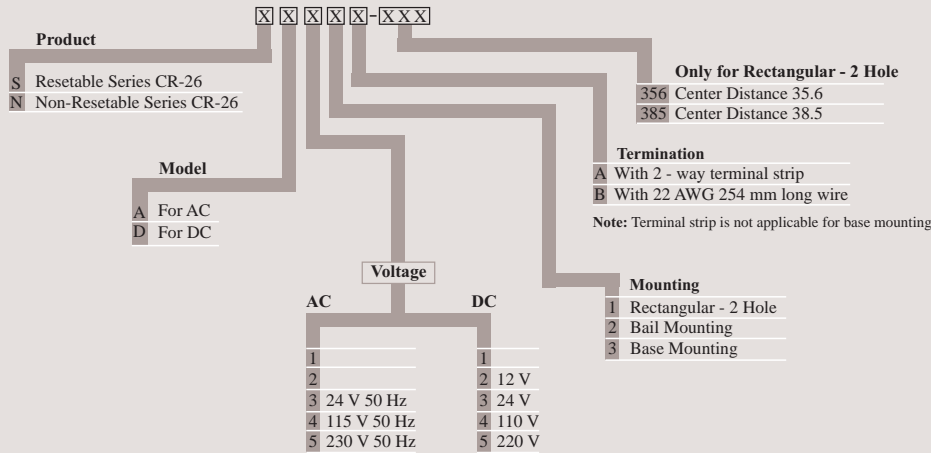

Note: Other voltage will be made available upon request.

Impulse Counter Series CR 26

MOUNTING DIMENSION (mm)

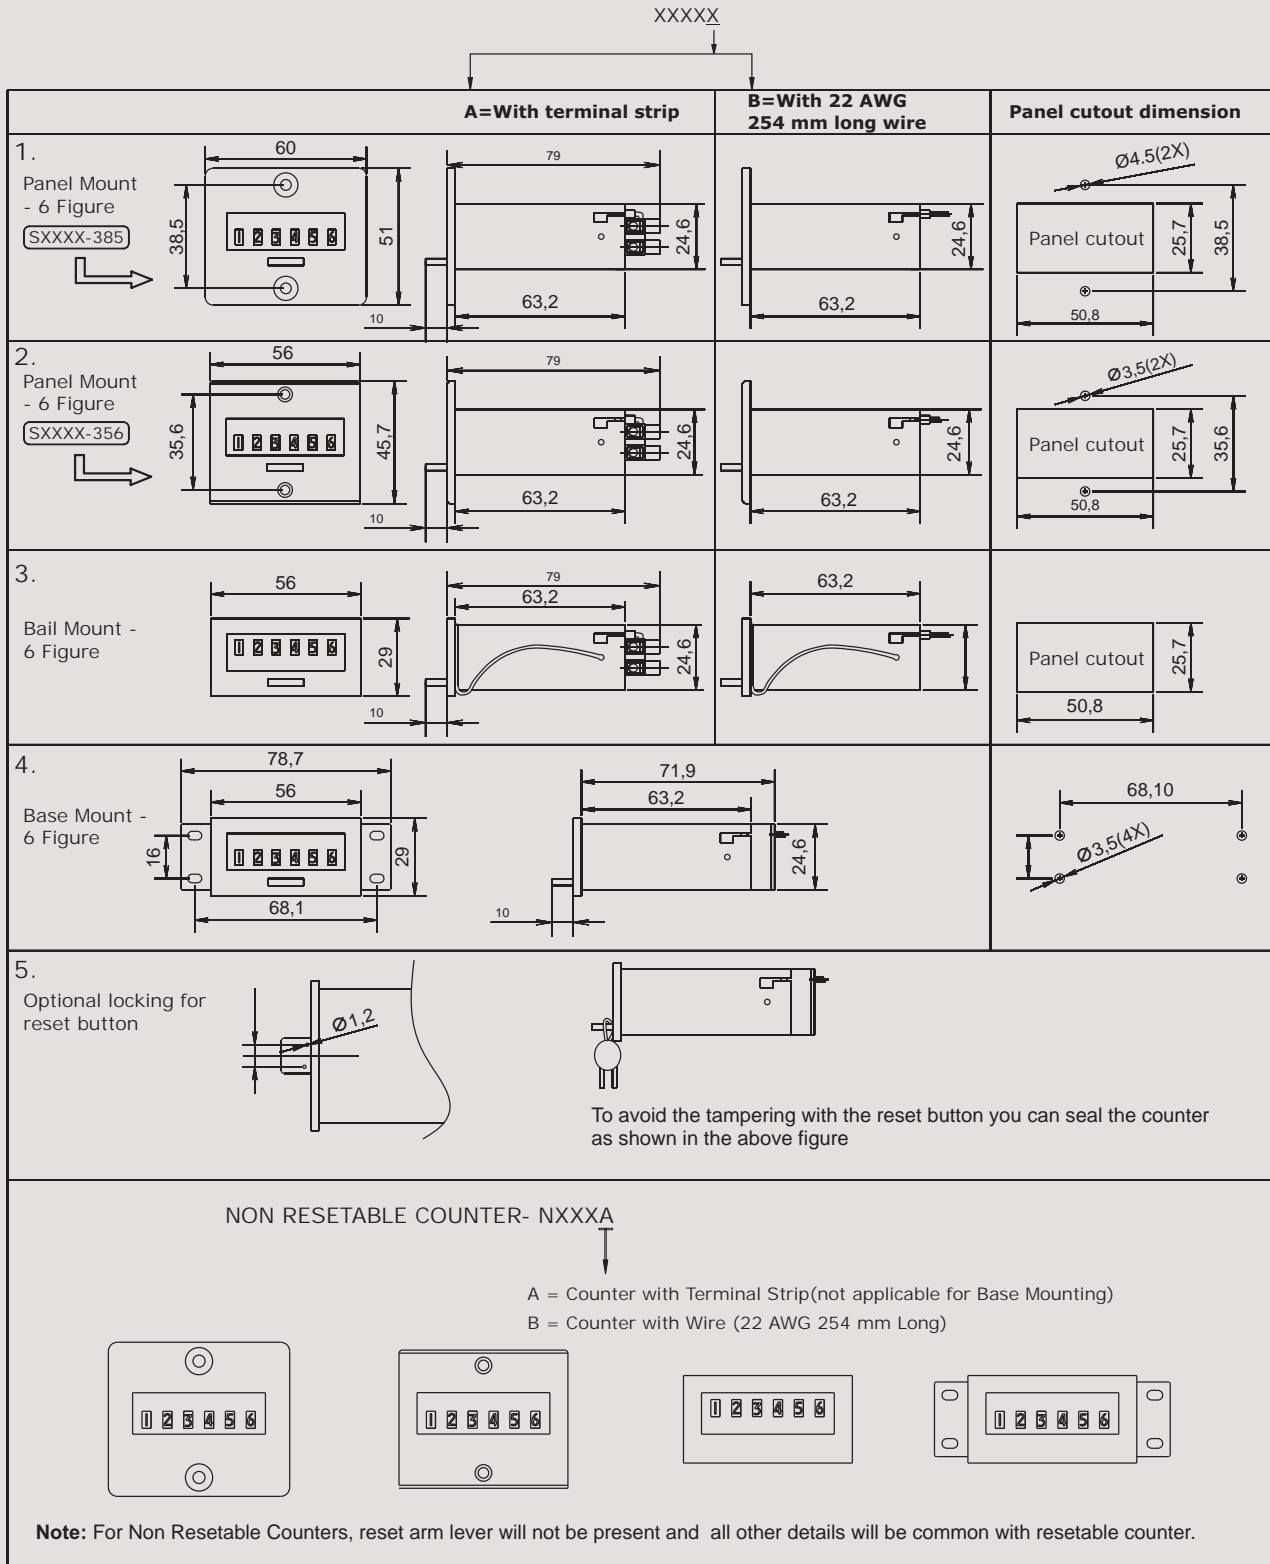

Digital Counters

- 6-digit LCD
- Exceptional reliability in-built nonvolatile memory (EEPROM)
- Wide range of supply voltage
- Remote reset
- Available in three different shaped bezels




Cat. No.	Z72FBX	ZJ2FBX	ZH2FBX
Parameters			
Supply Voltage (Un)	85-265 VAC 50/60 Hz	12-48 VAC/DC 50/60 Hz	10-80 VDC
Power Consumption	0.8 VA	0.4 W	0.6 W
Counting frequency	10Hz	10Hz	30Hz
Range	999999		
Display	Large 6-Digit display, easy to read		
Resolution	1 Count		
Reset	Electrical		
Memory Retention	100 Years		
Operating Temperature	- 10° C to +50° C		
Storage Temperature	- 20° C to +65° C		
Accuracy	± 1 Count		
Humidity	95% Rh		
Protection Class	IP54 (for front side only)		
Housing	UL94V0		
Terminals	1,2: Input Supply, 3: Count 4: Reset		
Panel cut outs	Round Bezel, 24 x 48 Bezel, Screw Mount Bezel		
Mounting	Flush/ Panel Mounting		
Certification			
Weight	with Round Bezel- 35g, with 24 x 48 Bezel- 29 g, with Screw Mount Bezel- 31 g (unpacked)		
EMI/ EMC	CISPR 14-1 Class B		
Radio Interference Suppression	IEC 61000-4-2 Level III		
ESD	IEC 61000-4-4 Level IV		
Electrical Fast Transients	IEC 61000-4-5 Level IV		
Surges	IEC 61000-4-11 (AC), IEC 61000-4-29 (DC)		
Voltage Dips & Interruptions			

ORDERING INFORMATION

Cat. No.	Description
Z72FBX	85-265 VAC model
ZJ2FBX	12-48V AC/DC model
ZH2FBX	10-80V DC model
X	A=Round Bezel, B=24x48 Bezel, C=Screw Mount Bezel


MOUNTING DIMENSION (mm)

Round bezel

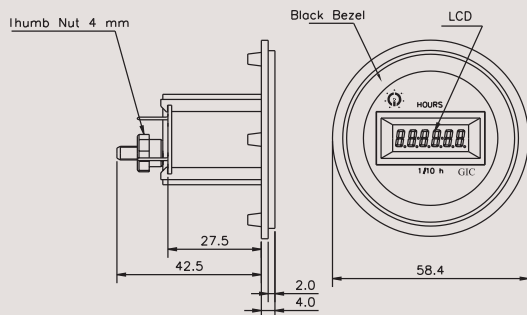


Recommended Panel Cutout :
37.0 (+0.5)mm x 24.6 (+0.5)mm

24x48 bezel

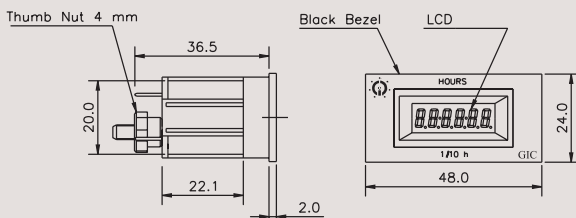


Recommended Panel Cutout :
45.5 (+0.5)mm x 23.0 (+0.5)mm

Screw mount bezel

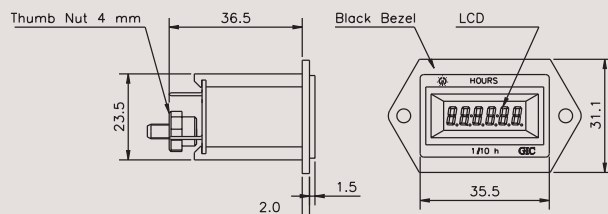

Recommended Panel Cutout :
37.0 (+0.5)mm x 24.6 (+0.5)mm

CONNECTION DIAGRAM



TERMINAL DESCRIPTION

- Pin 1: Supply (~ / +)
- Pin 2: Supply (~ / -)
- Pin 3: Enable
- Pin 4: Reset

PROGRAMMABLE LOGIC CONTROLLERS

Programmable Logic Controller Series *Genie™ NX*

INTERNATIONAL APPROVALS:



Programmable Logic Controller *Genie™-AX*


- Supports upto 48 I/Os (32 digital inputs & 16 digital outputs)
- 250 lines of ladder programming
- 16 soft text messages, Time Switches, Compare Counters

- Backlit LCD Screen for display & modification of pre-selected parameters of functional blocks, viewing I/O status and programming on the device
- PC software for programming, online & offline simulation, documentation & printing
- Designed for use in automation for commercial & Industrial sectors




Cat. No.	G7DDT9	G8DDT9
Parameters		
Supply Voltage	110-240 VAC, 50-60Hz	12-24 VDC
Supply Variation	-20% to +10% of normal voltage	
Max. Supply current	36 mA	360 mA
Power Consumption	~5W	
Analog input range	N A	0 to 10 VDC
Digital input range	(0-40 VAC) OFF, (70-265 VAC) ON	(0-4 VDC) OFF, (7-26.4 VDC) ON
Digital inputs	8	6
Analog inputs	N A	2 (can be used digitally)
Modbus Communication	Yes (RTU) (Slave)	
Switching contacts	4 SPST Relays, 8A @ 240 VAC / 5A @ 30 VDC (resistive)	
Timers	16	
Counters	16 (up / down & retentive selectable)	
Analog Functions	N A	12
Time Switches	16 (weekly / daily)	
Compare Counters	16	
Soft Messages	16 Priority Driven	
Auxiliary Relays	32	
I/O Extension (Max)	Yes (3)	
Power reserve (for clock only)	150h (lithium Battery) at 0°C to +55°C	
Lines for ladder program	250	
Protection	IP20 for front panel only (Conforming to IEC 60529)	
External Protection	Fuse 250 mA	Fuse 500 mA
Storage temperature	-20° C to +70°C	
Operating temperature	0° C to +55°C	
Maximum Relative Humidity	35 to 85 % no condensation	
Mounting	Base / DIN rail	
Dimensions (W x H x D)	72 X 65 X 90 (in mm)	
EMI/ EMC		
Radio Interference Suppression	CISPR 14-1 Class B	
ESD	IEC 61000-4-2 Level III	
Electrical Fast Transients	IEC 61000-4-4 Level IV	
Surges	IEC 61000-4-5 Level III	
Voltage Dips	IEC 61000-4-11	
Mechanical Resistance : Immunity to Vibrations	Vibration Tests as per IEC 68-2-6	
Certification	  	
Weight	248 g (unpacked)	232 g (unpacked)

MOUNTING DIMENSION (mm)

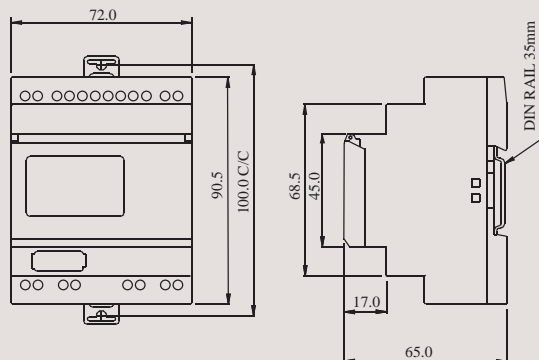


CONNECTION DIAGRAM

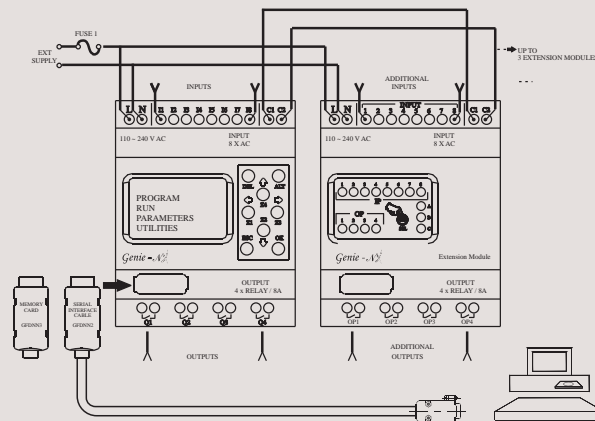




Cat. No.	G7XDTR4	G8XDTR4
Parameters		
Supply Voltage	110-240 VAC	12-24 VDC
Input	TTL Level	
Output	RS- 485 protocol (two wires, D +, D -)	
Number of Nodes	32 standard unit loads	
Isolation voltage	2000 Vrms	
Baud Rate	300,600,1200,2400,4800,9600	
Operating temperature	0°C to + 55°C	
Storage temperature	-20°C to + 70°C	
Modbus Communication	Yes (RTU) (Slave)	
LED Indicators	Red LED's for Tx & Rx. Green LED for Supply.	
Certification		
Weight	80 g (unpacked)	

MOUNTING DIMENSION (mm)

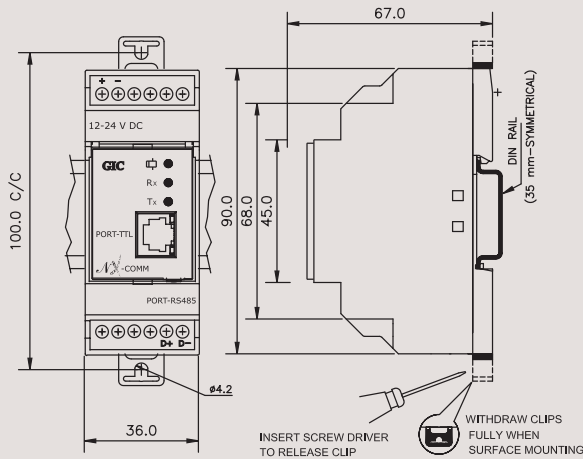

CONNECTION DIAGRAM

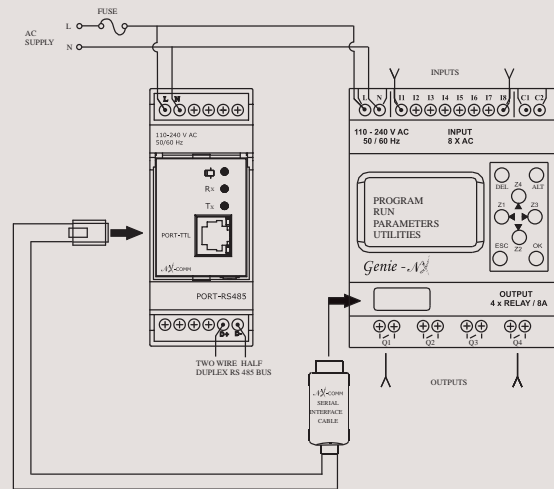

TERMINAL TORQUE & CAPACITY

 Torque 0.54 N.m (5 Lb. in) Terminal Screw - M 2.5 Ø 3.5 mm	
 1 x 0.2 - 3.3 mm ² Solid Wire / single wire ferrule 2 x 0.2 - 1 mm ² Insulated with twin ferrule	
AWG	1 x 24 to 12

ORDERING INFORMATION

Cat. No.	Description
G7DDT9	110-240 VAC, Genie Nx Base Module
G8DDT9	12-24 VDC, Genie Nx Base Module
G7DDT6E	110-240 VAC, Genie Nx Extension Module
G8DDT6E	12-24 VDC, Genie Nx Extension Module
GFDNN3M	Memory Card
GFDNN2S	RS 232 Serial Communication Cable
GFDNN1	USB Cable
GNXNN1	Genie Nx Software supplied on CD-ROM compatible with Windows 98, 2000, XP & VISTA.
G7XDTR4	110-240 VAC, RS 485 Module
G8XDTR4	12-24 VDC, RS 485 Module



FEATURES

Programming:

Programming can be carried out independently using the keys on the Genie NX base module with the help of ladder diagram & on a PC, using "Genie NX Soft" software.

When using a PC, programming can be carried out either in Ladder Language.

LCD Backlighting:

Backlighting of the display will be there for minimum 15 seconds & by direct action of the keys on the base module or by using the "Device Utilities" option in Genie NX Soft application software.

Memory:

Genie NX has a back up memory, which allows programs to be transferred or copied into another Genie NX with the help of memory card. This feature enables quick copy of the programs without the use of a laptop or PC.

I/O Extensions:

User can connect maximum 3 Extension Modules to the Genie NX base module & each Extension Module has 8 inputs and 4 outputs, so we can expand up to 48 I/O extensions if necessary via the Genie NX. Expansions are made in daisy chain fashion.

Communication Module:

A module for communication on the Modbus network is available, which is called "NX-Comm." to facilitate communication of the logic relay over a 2 wire half duplex RS 485 link. Modules are powered by 110- 240 VAC or 12- 24 VDC supplies. The base module can be connected to this communication interface by means of the cable supplied and the communication takes place via the NX-Comm. on the RS 485 link.

APPLICATIONS

For Industry:

- Printing and Packaging machines
- Ancillary equipments in textile, plastic.
- Material handling equipments or of conveyors.
- Interlocking units in distributed control systems.

For Commercial / Building Sector:

- Automation of barriers
- Automation of compressors and pumps for air conditioning requirements
- Automation of lights

SUPPLY MONITORING DEVICES

Supply Monitoring Series SM 301

Supply Monitoring Series SM 500

Supply Monitoring Series SM 501

Supply Monitoring Series SM 175

Frequency Monitoring Series PD 225

PTC Thermistor Relay Series PD 225

PTC Thermistor Relay & Phase Sequence Series PD 225

Supply Monitoring Series CMR - Current Control

Earth Leakage Relay Series CMR

INTERNATIONAL APPROVALS:



Supply Monitoring Series SM 301

- Protects against Phase Loss, Phase Reversal and Phase-Phase Unbalance
- No auxillary supply needed
- Voltage sensing principle
- Designed to meet Industrial and Agricultural segment applications




Cat. No.		MA51BC	MA51BK
Parameters			
Supply Voltage Un		415 VAC	
Frequency		50-60 Hz	
Power Consumption		15 VA max (415 V)	
Mode of Operation		Auto	
Trip Settings:			
Phase - Phase Unbalance		65 VAC ± 10 (fixed)	40 VAC ± 10 (fixed)
Unbalance Hysteresis		10 - 18 VAC	10 - 18 VAC
Time Delays:			
On Delay		2 Sec (fixed)	
Trip Time (Off Delay)		7 Sec (fixed)	
Setting Accuracy		± 10 % of full scale	
Relay Output		1 C/O (SPDT)	
Contact Rating		5A (resistive) @ 250 VAC / 28 VDC	
Electrical Life		1X10 ⁵	
Mechanical Life		3X10 ⁶	
Utilization Category	AC - 15	Rated Voltage (Ue): - 125/240 V, Rated Current (Ie) :- 3/1.5 A	
	DC - 13	Rated Voltage (Ue): - 125/250 V, Rated Current (Ie) :- 0.22/0.1 A	
LED Indication		Red → Relay ON (Healthy)	
Operating Temperature		- 10° C to + 50° C	
Storage Temperature		- 20° C to + 65° C	
Enclosure		Flame Retardant UL 94V0	
Dimension (W x H x D)		36 X 90 X 60 (in mm)	
Weight		120 g (unpacked)	
Mounting		Base / DIN rail	
Degree of Protection		IP20 for Terminal, IP 40 for Enclosure	
Certification		CE  , IEC 60255	
EMI/ EMC			
Radio Interference Suppression		CISPR 14-1 Class B	
ESD		IEC 61000-4-2 Level III	
Electrical Fast Transients		IEC-61000-4-4 Level IV	
Surges		IEC-61000-4-5 Level IV	
Voltage Dips, Interruptions		IEC-61000-4-11 All 7 Levels	
Isolation		Test voltage between input & output - IEC 60255-5, 2kV	


ORDERING INFORMATION

Cat. No.	Description
MA51BC	415 VAC, 50-60HZ with 65 VAC Asymmetry, 1 C/O
MA51BK	415 VAC, 50-60HZ with 40 VAC Asymmetry, 1 C/O




MOUNTING DIMENSION (mm)

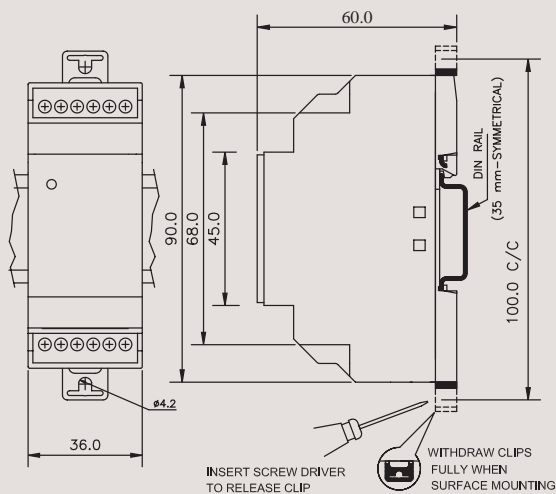

CONNECTION DIAGRAM



TERMINAL TORQUE & CAPACITY

 Ø 3.5 mm	Torque 0.54 N.m (5 Lb. in) Terminal Screw - M 2.5
	1 x 0.2 - 3.3 mm ² Solid Wire / single wire ferrule
	2 x 0.2 - 1 mm ² Insulated with twin ferrule
AWG	1 x 24 to 12

Supply Monitoring Series SM 500

- Protects against Phase Loss, Phase Reversal and Phase-Phase Unbalance
- Can be configured for 3 phase 4 wire or 1 phase system
- Selectable Over/Under voltage trip level
- Adjustable time delay
- LED indications for power and fault conditions
- Voltage sensing principle
- 1 C/O or 2 C/O configuration




Cat. No.	MD71B9	MD71BH	MD71BF
Parameters			
Supply Voltage (Un):	3 Phase 4 Wire, 240 VAC 1 Phase - 240 VAC		
Frequency	48 - 63 Hz		
Power Consumption	5 VA		
Trip Levels: Under Voltage Over Voltage	55% - 95% of Un 105% - 125% of Un Setting Accuracy: $\pm 5\%$ of full scale Note: Voltage setting is with respect to neutral		
Time Delays:			
ON Delay	0 to 15 m (Adjustable)	0 to 15 s (Adjustable)	5 s (Fixed)
OFF Delay	5 s (Fixed)	5 s (Fixed)	0 to 15 s (Adjustable)
Setting Accuracy	$\pm 10\%$ of full scale		
Relay Output	1 C/O (SPDT)		
Contact Rating	5A (Resistive) @ 250 VAC / 28 VDC		
Electrical Life	1 x 10 ⁶ Operations		
Mechanical Life	3 x 10 ⁶ Operations		
Utilization Category	AC - 15 DC - 13	Rated Voltage (Ue): - 120/240 V, Rated Current (Ie) :- 3/1.5 A Rated Voltage (Ue): - 24/125/250 V, Rated Current (Ie) :- 2/0.22/0.1 A	
LED Indication	Separate indications for Power ON, UV and OV		
Operating Temperature	-10° C To + 55° C		
Storage Temperature	-25° C To + 70° C		
Enclosure Dimension (W x H x D) Weight	Flame Retardant UL 94V0 36 X 90 X 60 (in mm) 120 g (unpacked)		
Mounting	Base / DIN rail		
Degree of Protection	IP20 for Terminal, IP 40 for Enclosure		
Certification	CE, IEC 60255		
EMI/ EMC	CISPR 14-1 Class B IEC 61000-4-2 Level III IEC-61000-4-4 Level IV IEC-61000-4-5 Level IV IEC-61000-4-11 All 7 Levels Test voltage between input & output - IEC 60255-5, 2kV		

Note: 1) In the event of Phase sequence or phase loss, OFF delay is 100 ms

ORDERING INFORMATION


Cat. No.	Description
MD71B9	UV / OV with adjustable 0 to 15 m on delay time, 1C/O
MD71BH	UV / OV with adjustable 0 to 15 s on delay time, 1C/O
MD71BF	UV / OV with adjustable 0 to 15 s off delay time, 1C/O

MOUNTING DIMENSION (mm)

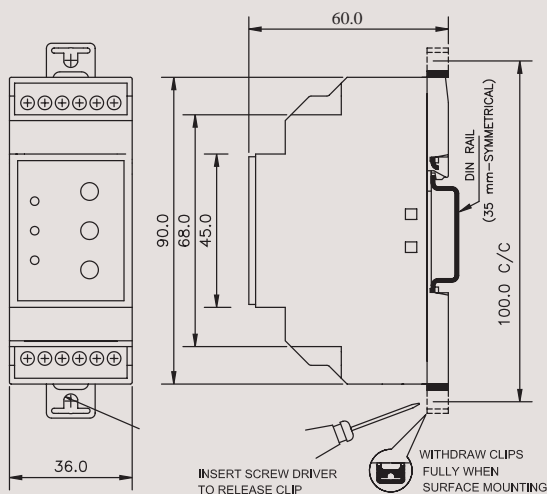


CONNECTION DIAGRAM

SINGLE PHASE APPLICATION



THREE PHASE APPLICATION



Supply Monitoring Series SM 500




Cat. No.	MG73B9	MG73BH	MG73BF
Parameters			
Supply Voltage (Un):	3 Phase 4 Wire, 240 VAC 1 Phase, 240 VAC		
Frequency	48 - 63 Hz		
Power Consumption	5VA		
Trip Settings :			
Under Voltage	55% - 95% of Un		
Over Voltage	105% - 125% of Un		
Phase - Phase Unbalance (Asy.)	10%		
Phase Reverse Detect	Yes		
Hysteresis	7 V ± 2 V of trip voltage (factory set) Note: Voltage setting is with respect to neutral		
Time Delays:			
ON Delay	0 to 15 m (Adjustable)	0 to 15 s (Adjustable)	5 s (Fixed)
OFF Delay	5 s (Fixed).	5 s (Fixed)	0 to 15 s (Adjustable)
Setting Accuracy	± 10 % of full scale.		
Contact Rating	2 C/O (DPDT) 5A (Resistive) @ 250 VAC / 28 VDC		
Electrical Life	1X10 ⁵		
Mechanical Life	3X10 ⁶		
Utilization Category	AC - 15 DC - 13	Rated Voltage (Ue): - 120/240 V, Rated Current (Ie) :- 3/1.5 A Rated Voltage (Ue): - 24/125/250 V, Rated Current (Ie) :- 2/0.22/0.1 A	
Operating Temperature	- 10°C to +55°C		
Storage Temperature	- 25°C to +70° C		
LED Indication	Separate indications for Power ON, UV, OV; ON: Phase Reverse, BLINK: Phase Unbalance (Asy.)		
Housing	UL 94VO		
Dimension (W x H x D)	36 X 90 X 60 (in mm)		
Weight	120 g (unpacked)		
Mounting	Base / DIN rail		
Degree of Protection	IP20 for Terminal, IP 40 for Enclosure		
Certification	CE , IEC 60255		
EMI/ EMC			
Radio Interference Suppression	CISPR 14-1 Class B		
ESD	IEC 61000-4-2 Level III		
Electrical Fast Transients	IEC-61000-4-4 Level IV		
Surges	IEC-61000-4-5 Level IV		
Voltage Dips, Interruptions	IEC-61000-4-11 All 7 Levels		
Isolation	Test voltage between input & output - IEC 60255-5, 2kV		

Note: 1) In the event of Phase sequence or phase loss, OFF delay is 100 ms

ORDERING INFORMATION


Cat. No.	Description
MG73B9	3 Phase 4 Wire, UV/OV & single phasing Protection with adjustable 0 to 15 m On delay time, 2 C/O
MG73BH	3 Phase 4 Wire, UV/OV & single phasing Protection with adjustable 0 to 15 s On delay time, 2 C/O
MG73BF	3 Phase 4 Wire, UV/OV & single phasing Protection with adjustable 0 to 15 s Off delay time, 2 C/O

MOUNTING DIMENSION (mm)

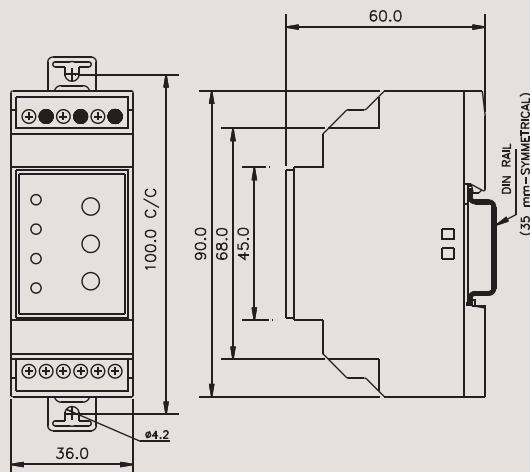


CONNECTION DIAGRAM

SINGLE PHASE APPLICATION

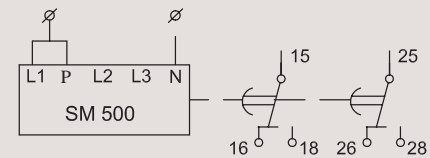

THREE PHASE APPLICATION

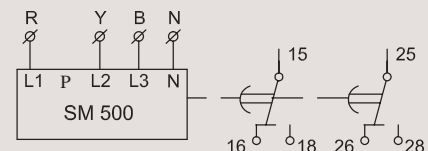

Supply Monitoring Series SM 501

- Protects against Phase Loss, Phase Reversal and Phase-Phase Unbalance
- Suitable for 3 phase 3 wire systems
- Selectable Over/Under voltage trip level
- Adjustable time delay
- Model for selectable Phase Asymmetry
- LED indications for power and fault conditions

- Voltage sensing principle
- 2 C/O configuration




Cat. No.		MG53BH	MG53BF	MG53BI
Parameters				
Supply Voltage Un		415 VAC		
Frequency		48 - 63 Hz		
Power Consumption		10 VA		
Trip Settings :				
Under Voltage		55% - 95% of Un		
Over Voltage		105% - 125% of Un		
Phase Reverse Detect		Yes		
Hysteresis		7 V ± 2V of trip voltage		
Phase - Phase Unbalance		10%		94 V
Time Delays				
ON Delay		0.5 - 15 s (adjustable)	5 s (fixed)	5 s (fixed)
OFF Delay		5 s (fixed)	0.5 - 15 s (adjustable)	5 s (fixed)
Setting Accuracy		± 10 % of full scale		± 10 % of full scale
Relay Output		2 C/O (DPDT)		
Contact Rating		5A (Resistive) @ 250 VAC / 28 VDC		
Electrical Life		1 x 10 ⁵		
Mechanical Life		3 x 10 ⁶		
Utilization Category	AC - 15	Rated Voltage (Ue): - 120/240 V, Rated Current (Ie) :- 3/1.5 A		
	DC - 13	Rated Voltage (Ue): - 24/125/250 V, Rated Current (Ie) :- 2/0.22/0.1 A		
Operating Temperature		- 10° C to +55° C		
Storage Temperature		- 25° C to +70° C		
LED Indications		Separate indications for Power ON: UV, OV, ON: Phase Reverse, BLINK: Phase Unbalance		
Enclosure		UL 94V0		
Dimension (W x H x D)		36 X 90 X 60 (in mm)		
Weight		120 g (unpacked)		
Mounting		Base / DIN rail		
Degree of Protection		IP20 for Terminal, IP 40 for Enclosure		
Certification		CE, IEC 60255		
EMI/ EMC				
Radio Interference Suppression		CISPR 14-1 Class B		
ESD		IEC 61000-4-2 Level III		
Electrical Fast Transients		IEC-61000-4-4 Level IV		
Surges		IEC-61000-4-5 Level IV		
Voltage Dips, Interruptions		IEC-61000-4-11 All 7 Levels		
Isolation		Test Voltage between input & output - IEC 60255-5, 2kV		

Note: 1) In the event of Phase sequence or phase loss, OFF delay is 100 ms


ORDERING INFORMATION

Cat. No.	Description
MG53BH	415 VAC, adjustable 0.5 - 15 s On & 5 s fixed Off Delay time, 2 C/O
MG53BF	415 VAC, adjustable 0.5 - 15 s Off & 5 s fixed On Delay time, 2 C/O
MG53BI	415 VAC, 94 volt fixed asymmetry, with 5 s fixed Off & On Delay time, 2 C/O
MG53BO	415 VAC, Under/Over Voltage, with fixed 3 m On / 5 s Off Delay time, 2 C/O
MG63BH	220 VAC, adjustable 0.5 - 15 s On & 5 s fixed Off Delay time, 2 C/O
MG63BF	220 VAC, adjustable 0.5 - 15 s Off & 5 s fixed On Delay time, 2 C/O

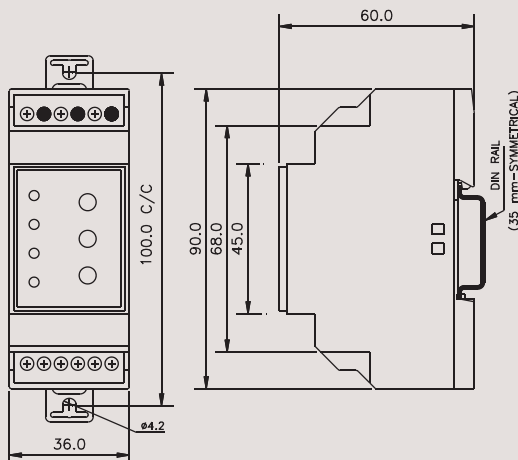


MOUNTING DIMENSION (mm)

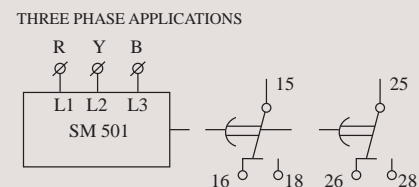

CONNECTION DIAGRAM



TERMINAL TORQUE & CAPACITY

 Ø 3.5 mm	Torque 0.54 N.m (5 Lb. in) Terminal Screw - M 2.5
	1 x 0.2 - 3.3 mm ² Solid Wire / single wire ferrule
	2 x 0.2 - 1 mm ² Insulated with twin ferrule
AWG	1 x 24 to 12

Supply Monitoring Series SM 501




Cat. No.	MB53BM	
Parameters		
Supply Voltage Un	415 VAC	
Frequency	48 - 63 Hz	
Power Consumption	10 VA	
Trip Settings :	80% of Un symmetrical, Hysteresis 7 V ± 2 V of input Voltage	
Under Voltage	Yes	
Phase Reverse Detect	Yes	
Phase- Phase Unbalance	5% - 17 % adjustable, Hysteresis 2%	
Time Delays		
ON Delay	0.5-15 s (adjustable)	
OFF Delay	0.5-15 s (adjustable)	
Setting Accuracy	± 10 % of full scale	
Electrical Life	1 x 10 ⁵	
Mechanical Life	3 x 10 ⁶	
Utilization Category	AC - 15	Rated Voltage (Ue): - 120/240 V, Rated Current (Ie) :- 3/1.5 A
	DC - 13	Rated Voltage (Ue): - 24/125/250 V, Rated Current (Ie) :- 2/0.22/0.1 A
Relay Output	2 C/O (DPDT)	
Contact Rating	5A (Resistive) @ 250 VAC / 28 VDC	
Operating Temperature	- 10° C to + 55° C	
Storage Temperature	- 25° C to + 70° C	
LED Indications	Indications for Power On, Symmetrical UV, Ph. Asymmetry, Reversal of phases.	
Enclosure	UL 94V0	
Dimension (W x H x D)	36 X 90 X 60 (in mm)	
Weight	120 g (unpacked)	
Mounting	Base / DIN rail	
Degree of Protection	IP20 for Terminal, IP 40 for Enclosure	
Certification	CE, IEC 60255	
EMI/ EMC		
Radio Interference Suppression	CISPR 14-1 Class B	
ESD	IEC 61000-4-2 Level III	
Electrical Fast Transients	IEC-61000-4-4 Level IV	
Surges	IEC-61000-4-5 Level IV	
Voltage Dips, Interruptions	IEC-61000-4-11 All 7 Levels	
Isolation	Test voltage between input & output - IEC 60255-5, 2kV	

Note: 1) In the event of Phase sequence or phase loss, OFF delay is 100 ms

ORDERING INFORMATION


Cat. No.	Description
MB53BM	415 VAC, adjustable Asymmetry 5% - 17% , 2 C/O

MOUNTING DIMENSION (mm)



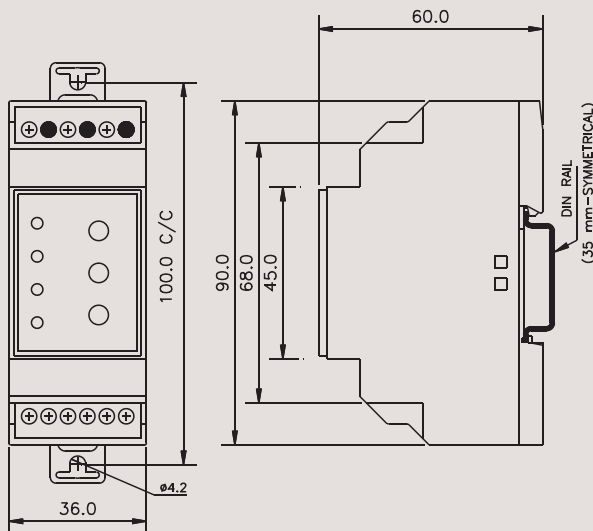


CONNECTION DIAGRAM

THREE PHASE APPLICATIONS

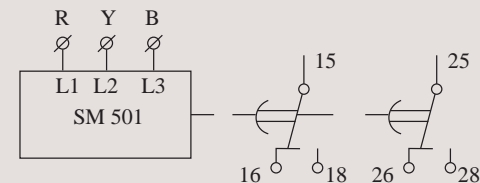

TERMINAL TORQUE & CAPACITY

 Ø 3.5 mm	Torque 0.54 N.m (5 Lb. in) Terminal Screw - M 2.5
	1 x 0.2 - 3.3 mm ² Solid Wire / single wire ferrule
	2 x 0.2 - 1 mm ² Insulated with twin ferrule
AWG	1 x 24 to 12

Supply Monitoring Series SM 501




Cat. No.	MC21B5
Parameters	
Supply Voltage Un	415 VAC
Frequency	48-62 Hz
Power Consumption	15 VA max (415 V)
Isolation	2.5KV (supply to relay contacts)
Mode of Operation	Auto
Trip Settings: Phase - Phase Unbalance Unbalance Hysteresis	65 VAC ± 5 (fixed) 10 - 18 VAC
Time Delays: ON Delay Trip Time (OFF Delay) Setting Accuracy	500 ms 500 ms
Relay Output Contact Rating Electrical Life Mechanical Life	2 C/O (DPDT) 5A (resistive) @ 250 VAC / 24 VDC 1X10 ⁵ 3X10 ⁶
LED Indication	Red LED ON → Healthy, Red LED Flashing → Wrong Connection/Sequence Fault Red LED OFF → Phase loss
Operating Temp Storage Temp	- 10° C to +50° C - 20° C to +65° C
Enclosure Dimension (W x H x D) Weight	Flame Retardant UL 94V0 36 X 90 X 60 (in mm) 120 g (unpacked)
Mounting	Base / DIN rail
Degree of Protection	IP20 for Terminal, IP 40 for Enclosure
Certification	CE, IEC 60255
EMI/ EMC Radio Interference Suppression ESD Electrical Fast Transients Surges Isolation	CISPR 14-1 Class B IEC 61000-4-2 Level III IEC-61000-4-4 Level IV IEC-61000-4-5 Level IV Test voltage between input & output - IEC 60255-5, 2kV

Note: 1) In the event of Phase sequence or phase loss, OFF delay is 100 ms


ORDERING INFORMATION

Cat. No.	Description
MC21B5	415VAC, 48-62HZ Phase fail / Phase Sequence 2 C/O

MOUNTING DIMENSION (mm)

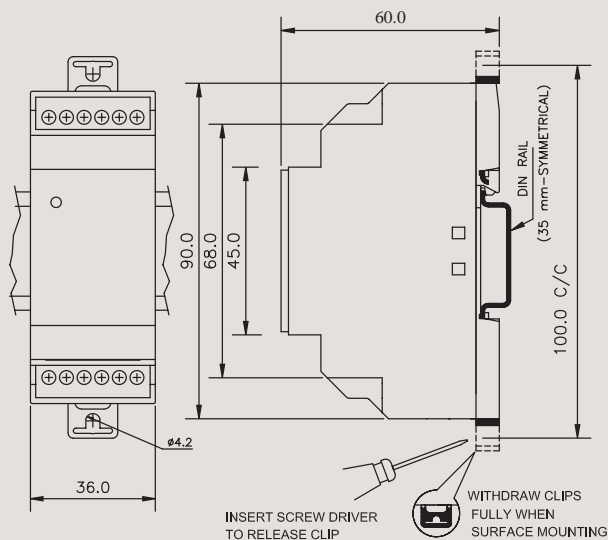

CONNECTION DIAGRAM

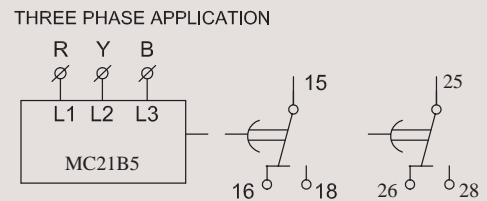


TERMINAL TORQUE & CAPACITY

Ø 3.5 mm	Torque 0.54 N.m (5 Lb. in) Terminal Screw - M 2.5
	1 x 0.2 - 3.3 mm ² Solid Wire / single wire ferrule 2 x 0.2 - 1 mm ² Insulated with twin ferrule
AWG	1 x 24 to 12

Supply Monitoring Series SM 175

- Compact 17.5 mm wide
- Multi-voltage from 3 x 208 to 3 x 480 V
- Controls correct sequence of three phases & own supply voltage
- LED indication for all faults & for change in settings during run time for better security
- 1 C/O configuration




Cat. No.		MK21D5	MC21D5	MA21DN	MD21DF	MG21DH	
Parameters							
Supply Voltage Un		3 Phase 3 Wire, 208 - 480 VAC, 45 - 65 Hz					
Supply Variation		-12% to + 10%					
Power Consumption		3 VA					
Settable Nominal Voltage (Un)		N A		208 - 220 - 380 - 400 - 415 - 440 - 480 VAC			
Trip Levels :	Under Voltage	N A		-2% to -20% (Un)		-5% to -25% (Un)	
	Over Voltage	N A		+2% to +20% (Un)		+5% to +25% (Un)	
	Asymmetry	N A	30% Fixed	5% to 15%	N A	10% Fixed	
Setting Accuracy		+/- 5% of full scale					
Time Delay	ON Delay	~ 500 ms		5 s (Fixed)	5 s (Fixed)	0.5 to 100 s	
	Setting Accuracy: +/- 10% of Full Scale	OFF Delay	~ 100 ms		0.5 to 15 s	0.5 to 15 s	5 s (Fixed)
In the event of phase sequence or phase loss fault, OFF delay is ~100ms							
Relay Output		1 C/O (SPDT)					
Contact Rating		5A (Resistive) @ 250 VAC / 30 VDC					
Mechanical Life		3 x 10 ⁶ Operations					
Electrical Life		1 x 10 ⁵ Operations					
Utilization Category	AC - 15	Rated Voltage (Ue): - 120/240 V, Rated Current (Ie) :- 3/1.5 A					
	DC - 13	Rated Voltage (Ue): - 24/125/250 V, Rated Current (Ie) :- 2/0.22/0.1 A					
Operating Temperature		- 15° C to +60° C					
Storage Temperature		- 20° C to +70° C					
Humidity (Non Condensing Limits)		Max. 95%					
LED Indications	Relay (R)	Healthy	Relay LED Continuous ON (Red Colour)			Power LED Continuous ON (Green Colour)	
		Phase Reverse	Relay LED Flashing (Red Colour)			Power LED Flashing (Green Colour)	
		Asymmetry	N A	Relay LED Off (Red Colour)		N A	
	OV	N A		OV - Red Colour LED ON			
	UV	N A		UV - Red Colour LED ON			
	AS	N A		AS-Red Colour LED ON			
	All LEDs Flashing	OFF	Phase Fail			Un Pot changed in running conditions	
Degree of Protection		Terminals - IP 20, Housing - IP 30, Pollution Degree - 2					
Dimension (W x H x D)		18 X 90 X 59 (in mm)					
Weight		70 g (unpacked)					
Mounting		Base / DIN rail					
Certification		CE  IEC 60255					
EMI/ EMC		CISPR 14-1 Class B					
Radio Interference Suppression		IEC 61000-4-2 Level III					
ESD		IEC-61000-4-4 Level IV					
Electrical Fast Transients		IEC-61000-4-5 Level IV					
Surges		IEC-61000-4-11 All 7 Levels					
Voltage Dips, Interruptions		Test voltage between input & output - IEC 60255-5, 2kV					
Isolation							

ORDERING INFORMATION


Cat. No.	Description
MC21D5	Phase Sequence, Asymmetry & Phase Loss Monitoring, 1 C/O
MK21D5	Phase Sequence, 1 C/O
MA21DN	Phase Sequence & Asymmetry Monitoring, 1 C/O
MD21DF	Phase Sequence, Under Voltage & Over Voltage Monitoring, 1 C/O
MG21DH	Phase Sequence, Asymmetry & Voltage Monitoring with Fixed OFF Delay (5 s), 1 C/O
MG21DF	Phase Sequence, Asymmetry & Voltage Monitoring with Fixed ON Delay (5 s), 1 C/O





MOUNTING DIMENSION (mm)

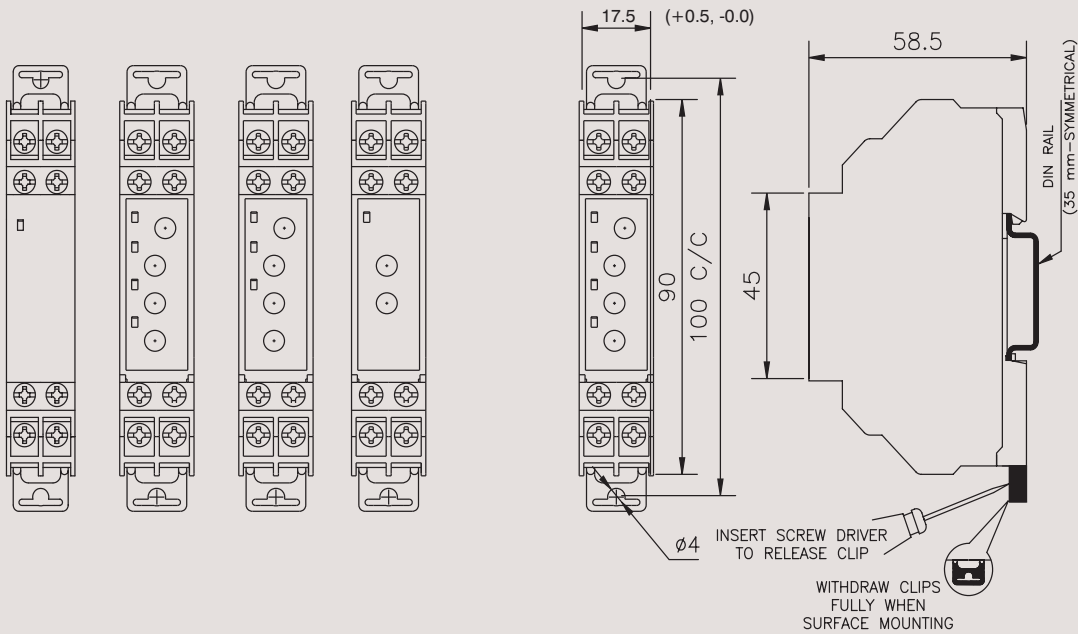

CONNECTION DIAGRAM

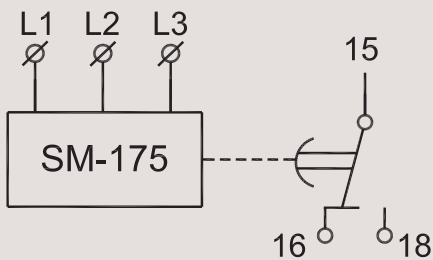

TERMINAL TORQUE & CAPACITY

 Ø3.5.....5.0mm	1.1 Nm(10 lb.in) Terminal screw - M3.5
	2 x 0.2...2.5 mm ² solid wire/single wire ferrule
AWG	1 x 24 to 10

Frequency Monitoring Series PD 225

- Operable in various auxiliary supply voltage conditions & frequency range by selecting proper model
- Models for Over Frequency and Under/Over Frequency Monitoring
- Monitors frequency of three signals - Sine, Square & Triangular
- Model for Frequency Limit Control: 5 Hz to 135 Hz
- Wide Signal Input Voltage: 15 to 500 VAC
- Adjustable Relay status in healthy or unhealthy condition using DIP switch "ET" (Energize to Trip) or "DT" (De-energize to trip.)
- Ease of Frequency setting with simple Addition & Subtraction
- LED indications for healthy, unhealthy & no signal conditions




Cat. No.		MI81BJ	MI91BL
Parameters			
Supply Voltage (Un):		110-240 VAC, 48-62 Hz	220-440 VAC, 48-62 Hz
Supply Variation		-15% to + 15% of Un	
Power Consumption		3 VA	
Signal Type		Sinusoidal, Square, Triangular	
Signal Input Voltage Range		(15 to 500) V	
Overall Frequency Range		(5 to 135) Hz	(40 to 70) Hz
Frequency Range Selection		A B Frequency Range	
		0 0 (5 to 15) Hz	
		1 0 (15 to 45) Hz	
		0 1 (45 to 135) Hz	
Trip Level		Over Frequency	
		Under Frequency	
Reset Hysteresis		1.5 % of Full Scale selected	
Setting Accuracy		± 5%	
Repeat Accuracy		± 0.02%	
Response Time		ON Delay	
		OFF Delay	
		Reset Time	
Relay Output		1 C/O (SPDT)	
Contact Rating		6A (Resistive) @ 240 VAC / 28 VDC	
Mechanical Life		3 x 10 ⁶ Operations	
Electrical Life		1 x 10 ⁵ Operations	
Contact Material		Ag alloy	
Utilization Category		AC - 15	Rated Voltage (Ue): - 120/240 V, Rated Current (Ie) :- 3/1.5 A
		DC - 13	Rated Voltage (Ue): - 125/250 V, Rated Current (Ie) :- 0.22/0.1 A
Operating Temperature		- 20° C to + 80° C	
Storage Temperature		- 15° C to + 60° C	
Humidity (Non Condensing Limits)		Max. 95%	
LED Indications for Relay		Red LED Flashing if No Signal	N A
LED Indications for UF & OF		N A	Seperate Indications given for UF & OF Status
Degree of Protection		Terminals - IP 20, Housing - IP 40	
Dimension (W x H x D)		22.5 X 83 X 100.5 (in mm)	
Weight		120 g (unpacked)	
Mounting		Base / DIN rail	
Certification		CE	
EMI/ EMC		CISPR 14-1 Class B	
Radio Interference Suppression		IEC 61000-4-2 Level II	
ESD		IEC-61000-4-4 Level IV	
Electrical Fast Transients		IEC-61000-4-5 Level IV	
Surges		IEC-61000-4-11 All 7 Levels	
Voltage Dips, Interruptions		Test Vtg. between input & output - IEC 60947- 5-1, 2kV	
Isolation			

ORDERING INFORMATION


Cat. No.	Description
MI81BJ	110-240 V AC, Over Frequency Monitoring Series PD 225 with ON Delay of 500 ms (Fixed), & OFF Delay of 500 ms (Fixed), 1 C/O
MI91BJ	220-440 V AC, Over Frequency Monitoring Series PD 225 with ON Delay of 500 ms (Fixed), & OFF Delay of 500 ms (Fixed), 1 C/O
MI81BL	110-240 V AC, Under/Over Frequency Monitoring Series PD 225 with ON Delay of 500 ms (Fixed) & OFF Delay of 500 ms to 5 Sec. (Selectable), 1 C/O
MI91BL	220-440 V AC, Under/Over Frequency Monitoring Series PD 225 with ON Delay of 500 ms (Fixed) & OFF Delay of 500 ms to 5 Sec. (Selectable), 1 C/O



MOUNTING DIMENSION (mm)

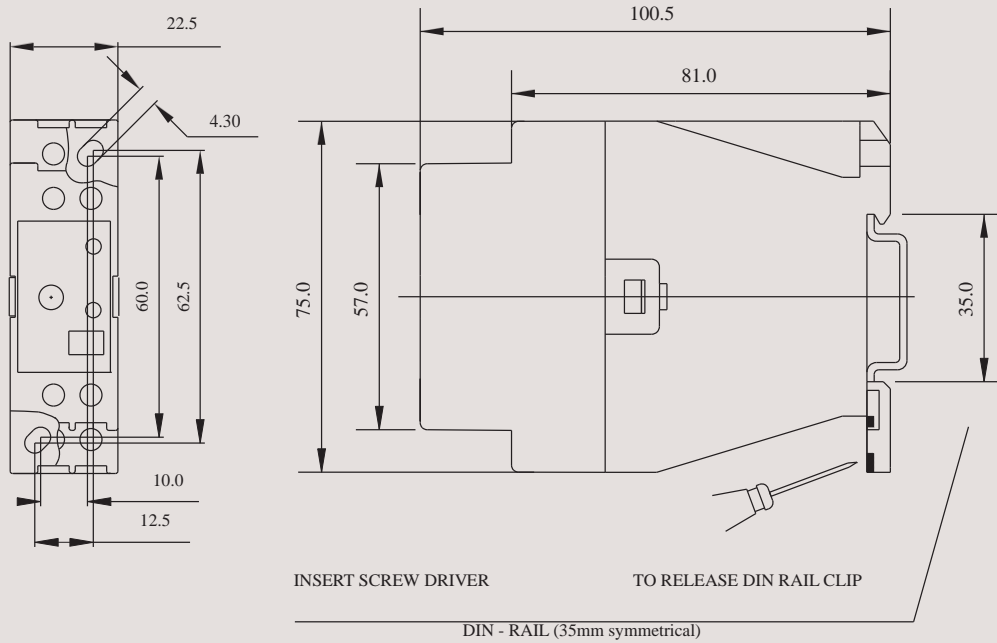


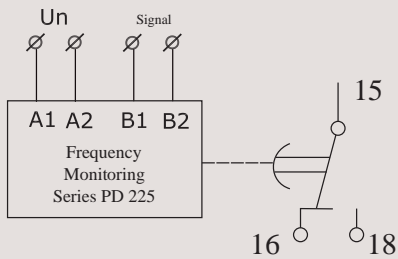

CONNECTION DIAGRAM



TERMINAL TORQUE & TERMINAL CAPACITY

Applicable for all Micon 225 Series, Frequency Monitoring Series PD 225 , Thermistor Series PD 225, Earth Leakage Series.

	Torque 0.6 N.m (6 Lb. in) Terminal Screw - M3
	1 x 1 - 4 mm ² Solid Wire / Single Wire Ferrule
	2 x 0.5 - 2.5 mm ² insulated twin type Ferrule
AWG	1 x 17 to 11

PTC Thermistor Relay Series PD 225

- Monitors and Protects motors with Integrated PTC resistor sensors
- Protection against over heating for Heavy Duty Load, High Switching Frequency, High operating temperature & Insufficient cooling conditions
- 24 VAC/DC & 110-240 VAC, 220-415 VAC Models with 2 C/O & 1 C/O respectively
- Reset Options: Manual, Automatic and Remote




Cat. No.		MJ81BK	MJ91BK	MJA3BK
Parameters				
Supply Voltage (Un):		110-240 VAC, 48-62 Hz	220-440 VAC, 48-62 Hz	24 VAC/DC, 48-62 Hz
Supply Variation		-20% to + 10% of Un		
Power Consumption		3 VA		2 VA
Trip Level		3.6 kΩ, ± 5%		
Reset Level		1.6 kΩ, ± 5%		
Sensor Short		< 20Ω, ± 4Ω		
Hysteresis		< 40Ω, ± 4Ω		
Sensor Open		> 10 kΩ, ± 5 %		
Max. Cold resistance of Sensor Chain		< 1.5 kΩ		
Mode of Reset		Manual Reset, Auto Reset, Remote Reset (Selectable)		
Repeat Accuracy		+/- 1%		
Response Time	Time Delay	ON Delay: ~500 ms OFF Delay: ~100 ms		
	Reset Time	~ 150 ms		
Relay Output		1 C/O (SPDT)		~ 200 msec. 2 C/O (DPDT)
Contact Rating		6A (Resistive) @ 250 VAC / 28 VDC		
Mechanical Life		3 x 10 ⁶ Operations		
Electrical Life		1 x 10 ⁶ Operations		
Contact Material		Ag alloy		
Utilization Category	AC - 15	Rated Voltage (Ue): - 120/240 V, Rated Current (Ie) :- 3/1.5 A		
	DC - 13	Rated Voltage (Ue): - 24/125/250 V, Rated Current (Ie) :- 2/0.22/0.1 A		
Operating Temperature		- 15° C to +60° C		
Storage Temperature		- 25° C to +80° C		
Humidity (Non Condensing Limits)		Max. 95%		
LED Indications	Power Supply	Healthy	Green LED Continuous ON	
		Sensor Open	Green LED Flashing	
	Relay	Relay ON	Red LED Continuous ON	
		Sensor Short	Red LED Flashing	
		All LEDs OFF	Power Supply Fail	
Degree of Protection		Terminals - IP 20, Housing - IP 40, Pollution Degree - 2		
Dimension (W x H x D)		22.5 X 83 X 100.5 (in mm)		
Weight		120 g (unpacked)		
Mounting		Base / DIN rail		
Certification		CE		
EMI/ EMC		CISPR 14-1 Class B		
Radio Interference Suppression		IEC 61000-4-2 Level II		
ESD		IEC-61000-4-4 Level IV		
Electrical Fast Transients		IEC-61000-4-5 Level IV		
Surges		IEC-61000-4-11 All 7 Levels		
Voltage Dips, Interruptions		Test Vtg. between input & output - IEC 60947- 5-1, 2kV		
Isolation				


ORDERING INFORMATION

Cat. No.	Description
MJ81BK	110-240 V AC, Thermistor Series PD 225, 1 C/O
MJ91BK	220-440 V AC, Thermistor Series PD 225, 1 C/O
MJA3BK	24 VAC/DC, Thermistor Series PD 225, 2 C/O

MOUNTING DIMENSION (mm)

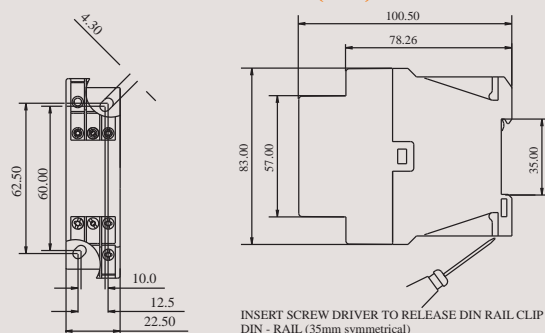

CONNECTION DIAGRAM

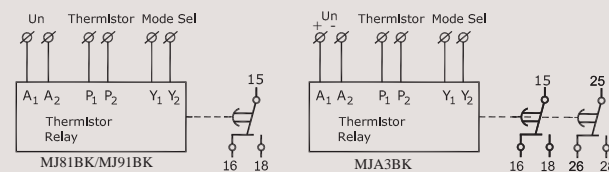

PTC Thermistor Relay & Phase Sequence Series PD 225

- Thermistor relay combined with protection against Phase sequence fault
- LED indications for Healthy, Unhealthy, Sensor Open/Short and Phase Sequence fault conditions
- Separate relays for PTC Thermistor and Phase Sequence fault
- Reset Options: Auto/Manual




Cat. No.	MLB4BK	MLC4BK
Parameters		
Supply Voltage (Un)	380-480 VAC (3 Phase - 3 Wire), 50 +/- 2 Hz	380-480 VAC (3 Phase - 3 Wire), 60 +/- 2 Hz
Supply Tolerance	-20% to +10% of Un	
Power Consumption	12 VA	
Relay O/P Characteristics		
Contact Arrangement	2 NO	
Contact Rating	6A @ 240 VAC / 28 VDC	
Utilization Category AC-15	Ue rated voltage V - 120/240; Ie rated current A - 3.0/1.5	
Utilization Category DC-13	Ue rated voltage V - 24/125/250; Ie rated current A - 2.0/0.22/0.1	
Contact Material	Ag alloy	
Mechanical Life	3 X 10 ⁵ operations	
Electrical Life	1 X 10 ⁵ operations	
Feature Characteristics		
Trip level	3.6 kΩ, +/- 5 %	
Reset Level	1.6 kΩ, +/- 5 %	
Sensor Short	< 20 Ω, +/- 4	
Hysteresis	< 40 , +/- 4 Ω	
Sensor Open	> 10 k Ω, +/- 5%	
Max. Cold resistance of sensor chain	<1.5 kΩ	
Reset mode	Auto/Manual	
Repeat Accuracy	+/- 1%	
Response Time	Operate Time (OT) ~ 500 ms Release Time (RT) ~ 100 ms Reset Time ~ 150 ms	
LED Indications	LED indications for Healthy, Unhealthy, Sensor Open / Short Conditions, SPPR fault Condition	
Mounting / Dimensions (W X H X D)	Base / DIN-rail / (36 X 90 X 60) mm	
Weight (Unpacked)	~ 120 g (approx.)	
Operating Temperature	-15°C to +60°C	
Storage Temperature	-25°C to +80°C	
Relative Humidity	95% (without condensation)	
Degree of Protection	IP 40 (Enclosure); IP 20 (Terminals); Pollution Degree - 2	
Certifications	CE IEC 60255 Ed. 1 (2005-12)	
EMI/ EMC Radiated Emission ESD Immunity Electrical Fast Transients Surge Immunity Voltage Dips & Interruptions Isolation	CISPR 14-1 Class A IEC 61000-4-2 Level II, IEC 61000-4-4 Level IV IEC 61000-4-5, Level IV IEC 61000-4-11, All 7 Levels Test Voltage between Input & Output IEC 60947-5-1, 2kV	


ORDERING INFORMATION

Cat. No.	Description
MLB4BK	380-415 VAC, 50 Hz, Thermistor + Phase Sequence series PD225, 2 NO
MLC4BK	380-415 VAC, 60 Hz, Thermistor + Phase Sequence series PD225, 2 NO

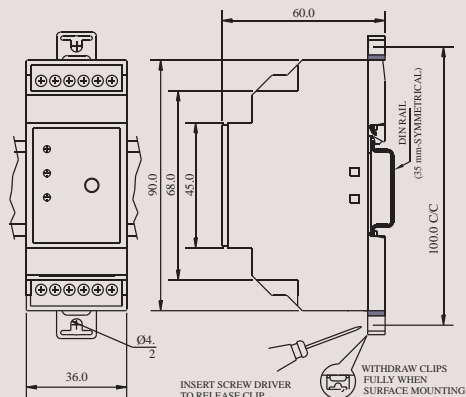


MOUNTING DIMENSION (mm)



CONNECTION DIAGRAM



TERMINAL TORQUE & CAPACITY

 Ø 3.5 mm	Torque 0.54 N.m (5 Lb. in) Terminal Screw - M 2.5
	1 x 0.2 - 3.3 mm ² Solid Wire / single wire ferrule
	2 x 0.2 - 1 mm ² Insulated with twin ferrule
AWG	1 x 24 to 12

Supply Monitoring Series CMR - Current Control

- Protection against Overload, Phase Loss, Phase Reverse, and Phase Unbalance faults
- Wide range of sensing current : 1A-45A
- Models for 1 Phase and 3 Phase systems
- Auto/Manual Reset selection
- Fail-safe protection
- Inverse time model with underload, locked rotor protection and selectable trip class
- Definite time model with underload and selectable start and trip time




Cat. No.	17A122CB0	17B122AA0	17C112EB0	17D112DA0
Parameters				
Supply Voltage	220-415 VAC, -20% to +15% 50 / 60 Hz		110-240 VAC, -20% to +10% 50 / 60 Hz	
Power Consumption	10 VA (Approx)		5 VA (Approx)	
Current Ranges	3 - 9 A			
Trip Type	Inverse Time	Definite Time	Inverse Time	Definite Time
Thermal Memory	Yes	-	Yes	-
Tripping Class	10A, 10, 20, 30	-	10A, 10, 20, 30	-
Start Time	0.2 - 30 s			
Delay Time	0.2 - 10 s			
Underload Protection	40% - 90% (Trip Time: < 5 s)	50% / (Trip Time: < 5 s)	40% - 90% (Trip Time: < 5 s)	50% / (Trip Time: < 5 s)
Phase Imbalance Protection	50% unbalance (Trip Time: < 5 s)		-	
Phase Loss Protection	70% of unbalance (Trip Time: < 3 s)		-	
Locked Rotor Protection	300% of the set value (Trip Time: < 3 s after starting)		300% of the set value (Trip Time: < 3 s after starting)	
Phase Reverse Protection	Yes / (0.2 s approx.)		-	
Reset Mode	Auto / Manual			
Test Function	Yes			
LED Indication	ON OL UL REV/UNB	Power ON Overload Underload ON: Phase Reverse / BLINK: Phase Unbalance		
Output Relay Contact	1 NO (Fail Safe Protection)			
Contact Rating	5A @ 240VAC			
Tolerance	± 5 % of full scale			
Certification	CE			
EMI/EMC	CISPR 14-1 Ed. 5.0 (2005-11) CLASS B IEC 61000-4-4, Ed. 2.0 (2004-07) Level IV IEC 61000-4-5, Ed. 2.0 (2005-11) Level III IEC 60947-5-1 Ed. 3.0 (2003-11) 2 kV			
Conducted Emission				
Electrical Fast Transients				
Surge				
Test Voltage between Input & Output				
Mechanical Life Expectancy	1 x 10 ⁶ Operations			
Electrical Life Expectancy	1 x 10 ⁵ Operations			
Operating Temperature	- 10° C to + 60° C			
Storage Temperature	- 25° C to + 70° C			
Mounting / Dimensions	Base Mounting			
Weight	210 g (unpacked)			

Note: In case of Phase loss protection all LED's remains off.


ORDERING INFORMATION

Cat. No.	3 Phase	1 Phase	Description
17A122CB0	17C112EB0		Inverse Time Current Monitoring, 3 - 9 A, 1 NO
17A222CB0	17C212EB0		Inverse Time Current Monitoring, 8 - 24 A, 1 NO
17A322CB0	17C312EB0		Inverse Time Current Monitoring, 15 - 45 A, 1 NO
17B122AA0	17D112DA0		Definite Time Current Monitoring, 3 - 9 A, 1 NO
17B222AA0	17D212DA0		Definite Time Current Monitoring, 8 - 24 A, 1 NO
17B322AA0	17D312DA0		Definite Time Current Monitoring, 15 - 45 A, 1 NO

MOUNTING DIMENSION (mm)

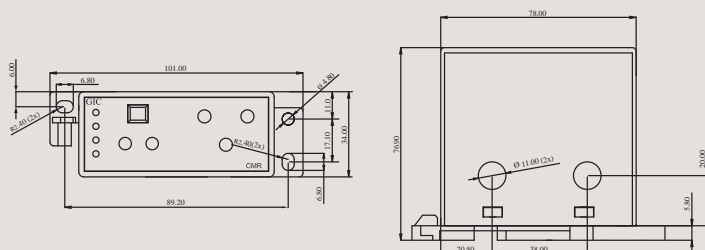

CONNECTION DIAGRAM

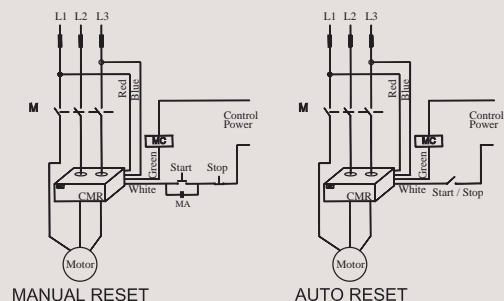

Earth Leakage Relay Series CMR

- Monitors, detects and protects power systems from Leakage faults
- Wide auxiliary supply range: 110 - 240 VAC, 220 - 415 VAC
- Wide range of selectable Earth Leakage Current: 60 mA - 300 mA, 0.2A - 1.2A
- Configurable Earth Leakage Trip time: 100 ms - 5 s
- Easily configurable operating modes
- Test feature to check complete product functionality
- Manual / Remote reset feature
- LED indication for relay status, CT open, earth leakage fault & test/reset switch short




Cat. No.	17G544FF1	17G644FF1	17G514FF1	17G614FF1
Parameters				
Supply Voltage Un	220-415 VAC, -20 to +10%, 50/60Hz		110-240 VAC, -20 to +10%, 50/60Hz	
Power Consumption (Max)	10 VA		5 VA	
Relay Output Characteristics:				
Contact arrangement	1C/O (SPDT)			
Contact rating	5 A @ 240 VAC / 30 VDC			
Utilization Category AC-15				
Ue Rated Voltage V	120 / 240 V			
Ie Rated Current A	3.0 / 1.5 A			
Utilization Category DC-13				
Ue Rated Voltage V	125 / 250 V			
Ie Rated Current A	0.22 / 0.11 A			
Mechanical Life	10 million operations			
Electrical Life	0.1 million operations@ rated load			
LED Indications	Green LED - Power ON, Red LED 1 ON - Earth Leakage, Red LED 2 - a. Blink - Test Switch short, b. ON - CT Open			
ON Delay Time	50 +/- 20 ms			
Trip (OFF) Time	100ms to 5s (Adjustable)			
Accuracy	Setting Accuracy: -10% (85 ms to 100 ms trip time for 100 ms setting in NFSNL) Repeat Accuracy: +/- 1%			
Storage Temperature	-20°C to + 80°C			
Operating Temperature	-15°C to + 60°C			
Relative Humidity	95% (without condensation)			
Certification	CE			
Weight	119 g (unpacked)			
Degree of Protection	IP-40 (Enclosure); IP-20 (Terminal); Pollution Degree - 2			
EMI/ EMC				
Radio Interference Suppression	CISPR 14-1 Class B			
ESD	IEC 61000-4-2 Level II			
Electrical Fast Transients	IEC-61000-4-4 Level IV			
Surges	IEC-61000-4-5 Level IV			
Voltage Dips, Interruptions	IEC-61000-4-11 Levels I to V Class A, Levels III, VI to VII Class B,		IEC-61000-4-11 Levels I, II, IV & V Class A, Levels III, VI to VII Class B,	
Isolation	Test Vtg. between input & output - IEC 60947- 5-1, 2 kV			

ORDERING INFORMATION

Cat. No.	Description
17G514FF1	110-240V AC, Current Range 60 mA - 300 mA, 1 C/O
17G614FF1	110-240V AC, Current Range 0.2 A-1.2 A, 1 C/O
17G544FF1	220-415V AC, Current Range 60 mA - 300 mA, 1 C/O
17G644FF1	220-415V AC, Current Range 0.2 A-1.2 A, 1 C/O
17H5NNHL3	CBCT (tape wound), 35mm, 60mA-300mA
17H6NNHL3	CBCT (tape wound), 35mm, 0.2A-1.2A





Note: CBCT's of other sizes will be available as required.

MOUNTING DIMENSION (mm)


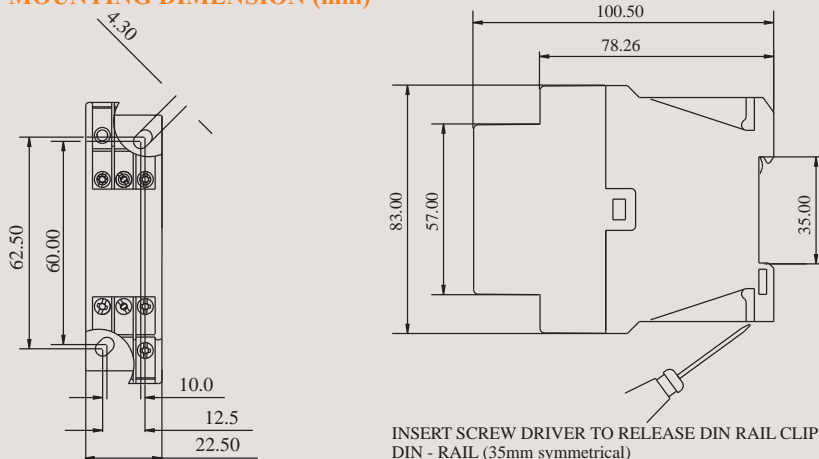




CONNECTION DIAGRAM

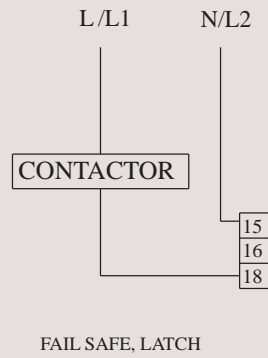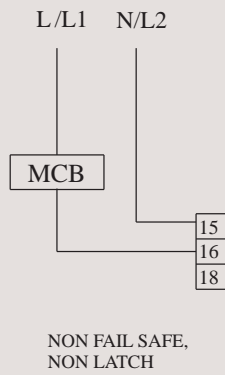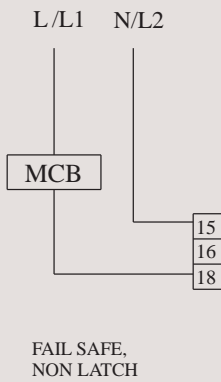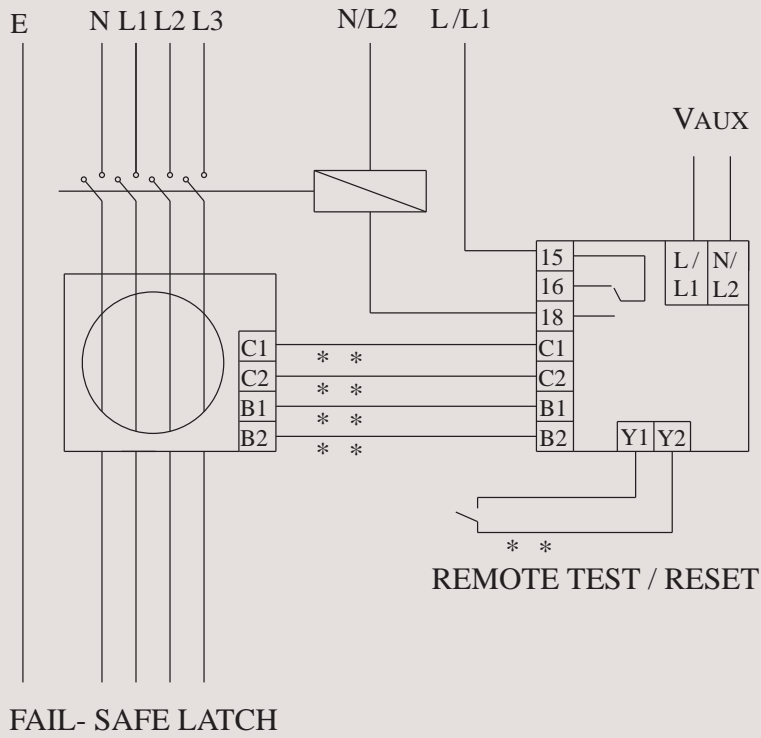

TERMINAL TORQUE & CAPACITY

 Ø 3.5 mm	Torque 0.54 N.m (5 Lb. in) Terminal Screw - M3
	1 x 1 - 6 mm ² Solid Wire / single wire ferrule 2 x 0.5 - 2.5 mm ² Insulated with twin ferrule
AWG	1 x 20 to 10

TEMPERATURE CONTROLLERS

PID Temperature Controller Series PR 69

INTERNATIONAL APPROVALS:



PID Temperature Controller Series PR 69


- Universal Input
- Configurable output combination
- Field configurable, band, deviation, sensor break & loop break alarms
- Single/Dual acting PID controllers with 5 control modes
- Auto-tuning PID with provision for soft- start
- RS 485 communication
- Bumpless auto-manual transfer

- Rapid set point change feature
- 6 segment ramp & soak profile with power failure resumption modes
- IP 65 protection



Cat. No.	151D12B	151A12B	151B12B	151C12B
Parameters				
Supply Voltage	110-230 VAC, 50-60 Hz			
Supply Variation	-20%/+10%			
Operating Temperature Range	0°C to + 50°C			
Temperature sensors / inputs	J, K, E, S, B, R thermocouple, RTD(PT100-3 wire compensation), mV signals (0-50 mV, 0-60 mV, 12-60 mV)			
Measurement Range	Sensor J: 0 to 700°C/32 to 1292°F, Sensor K: 0 to 1300°C/32 to 2372°F, Sensor E: 0 to 600°C/32 to 1112°F, Sensor R: 0 to 1750°C/32 to 3182°F, Sensor S: 0 to 1750°C/32 to 3182°F, Sensor B: 250 to 1820°C/482 to 3308°F, Sensor Pt100 3 wire: - 200 to 700°C/-328 to 1292°F			
Measurement Accuracy	+/-0.5% of full scale of PT100, +/-1% of full scale for TC			
Resolution	0.1°C for RTD, J,K,E & 1° for S,B & 0.001°C for mV signals			
Configurable Set Points	4			
Display	Dual 7 segment with LED indications, 4-digit process value, 4 digit set value			
Keypad	4-Keys; 1 - Enter, 2-Up, 3 - Down, 4 - Configurable			
SSR output	NA	12 VDC, 24mA, short circuit protection		NA
Linear DC Output	NA		0 - 10V or 4 - 20mA (user selectable through software)	
Linear DC Output Update rate	NA		150 ms - 5 s Programmable	
Linear DC Output type	NA		Retransmission - PV, Control - Output Power.	
Contact rating	One SPST relay 8A, 240VAC OR 5A, 28VDC Two SPST relay 5A 240VAC or 28VDC	One SPST relay 5A, 240 VAC/ 28 VDC, One analog output (0-10 V, 4-20 mA) & a SSR driving output (12 VDC, 24 mA)		2 relays (SPST 5A each, 240V AC / 28V DC) and One analog output (0-10 V, 4-20 mA)
Statutory Requirements:				
Pollution Degree	2			
IP Standard	IP65 (For Front Panel only)			
Dimensions (W x H x D)	48 x 48 x 91.5 (in mm)			
Certification				
EMI/EMC				
ESD	IEC 61000-4-2 Level II			
Radio interference suppressions	CISPR 14-1 Class A			
Fast transients	IEC61000-4-4 Level IV			
Surges	IEC61000-4-5 Level IV			
Weight	185g (unpacked)			

MOUNTING DIMENSION (mm)

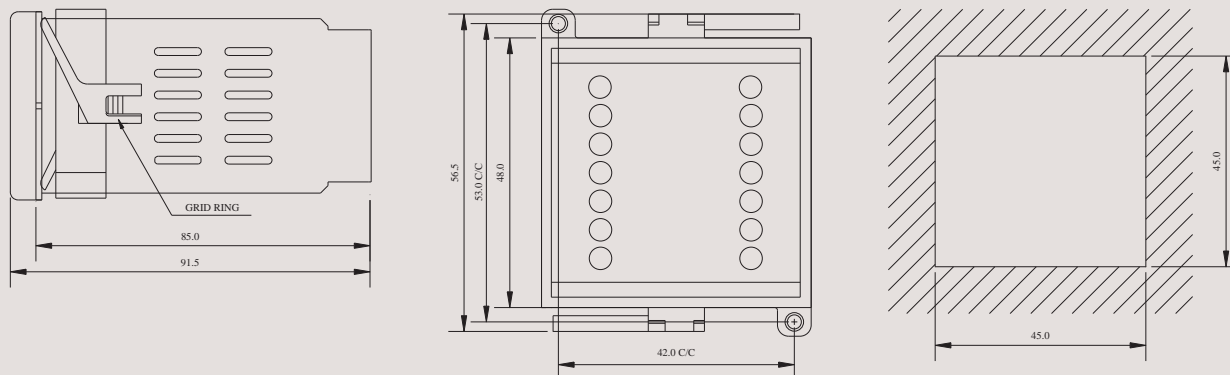

TERMINAL TORQUE & CAPACITY

 Ø 3.5 mm	Torque 0.5 N.m (5 Lb. in) Terminal Screw - M3
	1 x 0.12 - 2 mm ² Solid Wire / single wire ferrule 2 x 0.2 - 1 mm ² Insulated with twin ferrule
AWG	1 x 24 to 12

PID Temperature Controller Series PR 69



Cat. No.	151D13B1	151A13B1	151B13B1	151C13B1
Parameters				
Supply Voltage	110-240 VAC, 50-60 Hz			
Supply Variation	-20%/+10%			
Operating Temperature Range	0°C to + 50°C			
Temperature sensors / inputs	J, K, E, S, B, R thermocouple, RTD(PT100-3 wire compensation), mV signals (0-50 mV, 0-60 mV, 12-60 mV)			
Measurement Range	Sensor J: 0 to 700°C/32 to 1292°F, Sensor K: 0 to 1300°C/32 to 2372°F, Sensor E: 0 to 600°C/32 to 1112°F, Sensor R: 0 to 1750°C/32 to 3182°F, Sensor S: 0 to 1750°C/32 to 3182°F, Sensor B: 250 to 1820°C/482 to 3308°F, Sensor Pt100 3 wire: - 200 to 700°C/-328 to 1292°F			
Measurement Accuracy	+/-0.5% of full scale of PT100, +/-1% of full scale for TC			
Resolution	0.1°C for RTD, J,K,E & 1° for S,B & 0.001°C for mV signals			
Configurable Set Points	4			
Display	Dual 7 segment with LED indications, 4-digit process value, 4 digit set value			
Keypad	4-Keys; 1 - Enter, 2-Up, 3 - Down, 4 - Configurable			
SSR output	NA	12 VDC, 24mA, short circuit protection		NA
Linear DC Output	NA		0 - 10V or 4 - 20mA (user selectable through software)	
Linear DC Output Update rate	NA		150 msec - 5 sec Programmable	
Linear DC Output type	NA		Retransmission - PV or SP, Control - Output Power.	
Contact rating	One SPST relay 8A, 240VAC OR 5A, 28VDC Two SPST relay 5A 240VAC or 28VDC		One SPST relay 5A, 240 VAC/ 28 VDC, One analog output (0-10 V, 4-20 mA) & a SSR driving output (12 VDC, 24 mA)	2 relays (SPST 5A each, 240V AC / 28V DC) and One analog output (0-10 V, 4-20 mA)
Transmission Speed / RS 485	300 to 19200 BPS			
Transmission Speed	Half Duplex			
Protocol	Modbus RTU			
Statutory Requirements: Pollution Degree	2			
IP Standard	IP65 (For Front Panel only)			
Dimensions (W x H x D)	48 x 48 x 91.5 (in mm)			
Certification				
EMI/EMC				
ESD	IEC 61000-4-2 Level II			
Radio interference suppressions	CISPR 14-1 Class A			
Fast transients	IEC61000-4-4 Level IV			
Surges	IEC61000-4-5 Level IV			
Weight	185g (unpacked)			

ORDERING INFORMATION

Cat. No.	Description
151A12B	Single Acting PID Controller
151B12B	1 relay (SPST 5A, 240 VAC / 28 VDC), Analog output (0-10V, 4-20mA), SSR driving output (12 VDC, 24mA)
151C12B	2 relays (SPST 5A each, 240V AC/28V DC), Analog output (0-10V, 4-20mA)
151D12B	3 relays (SPST One 8A & Two 5A, 240V AC / 28V DC)
151A13B1*	Dual Acting PID Controller
151B13B1*	1 relay (SPST 5A, 240 VAC / 28 VDC), Analog output (0-10V, 4-20mA), SSR driving Output (12V DC, 24mA)
151C13B1*	2 relays (SPST 5A each, 240 VAC/28V DC), Analog output (0-10V, 4-20mA)
151D13B1*	3 relays (SPST One 8A & Two 5A, 240 VAC / 28 VDC)

*Note: With RS485 Modbus Communication


TERMINAL TORQUE & CAPACITY

	Torque 0.5 N.m (5 Lb. in) Terminal Screw - M3
	1 x 0.12 - 2 mm ² Solid Wire / single wire ferrule 2 x 0.2 - 1 mm ² Insulated with twin ferrule
AWG	1 x 24 to 12




CONNECTION DIAGRAM


151A12B




151C12B




151B12B




151D12B




151A13B1




151C13B1

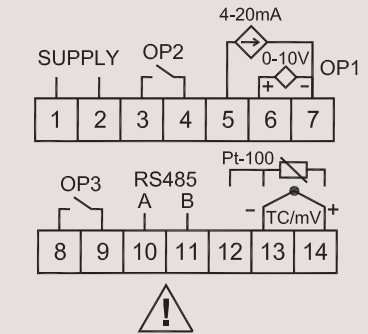

151B13B1



151D13B1





General Industrial Controls Private Limited

T-107, M.I.D.C., Bhosari, Pune 411026 (INDIA)

Tel: +91 20 30680018 / 30680019 Fax: +91 20 27122574

Email: marketing@gicindia.com | www.gicindia.com