



Part Nos. 1106396 & 1107254 Row-to-Row DIP Adapter Sockets

FEATURES:

- Aries' adapter sockets allow the use of .300 [7.62] center devices when the PCB is drilled on .600 [15.24] centers and vice-versa, giving the flexibility of using .600 [15.24] or .300 [7.62] center devices in the same application.


SPECIFICATIONS:

- Socket body is black UL 94V-0 Glass-filled 4/6 Nylon.
- Pin body is Brass Alloy 360 1/2 hard per UNS C36000 ASTM-B16-00.
- Pin body plating is 200 μ [5.08 μ m] min. 93/7 Tin/Lead per ASTM B545 or over 200 μ [5.08 μ m] min. Tin per ASTM B545 Type 1 over 100 μ [2.54 μ m] Nickel per SAE-AMS-QQ-N-290.
- 4-fingered collet contact is Beryllium Copper Alloy per UNS C17200 ASTM-B194-01.
- Contact plating is 30 μ [.76 μ m] min. Gold per MIL-G-45204 over 50 μ [1.27 μ m] min. Nickel per SAE-AMS-QQ-N-290.
- Contact current rating=3 Amps.
- Operating temperature=221°F [105°C].
- Insertion Force=180 grams/pin; Withdrawal Force=90 grams/pin; Normal Force=140 grams/pin; based on a .018 [.46] diameter test lead.
- Accepts leads .015-.025 [.38-.64] in diameter, .110-.150 [2.79-3.81] long.

MOUNTING CONSIDERATIONS:

- Suggested PCB hole size=.035 \pm .002 [.89 \pm .05] dia.

ALL DIMENSIONS: INCHES [MILLIMETERS]

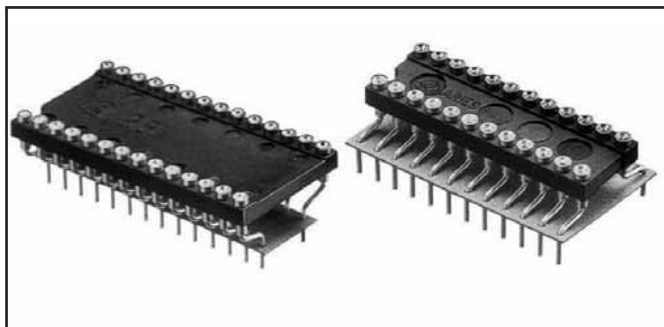

Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION


Specify Part No. 1106396-XX (Tin) OR 1106396-XXTL (Tin/Lead) when ordering .300 DIP to .600 PCB [7.62 to 15.24] adapter, where XX=no. of pins (6 thru 40)

-or-

Specify Part No. 1107254-XX (Tin) OR 1107254-XXTL (Tin/Lead) when ordering .600 DIP to .300 PCB [15.24 to 7.62] adapter, where XX=no. of pins (6 thru 40)


1106396-XX OR -XXTL

1107254-XX OR -XXTL

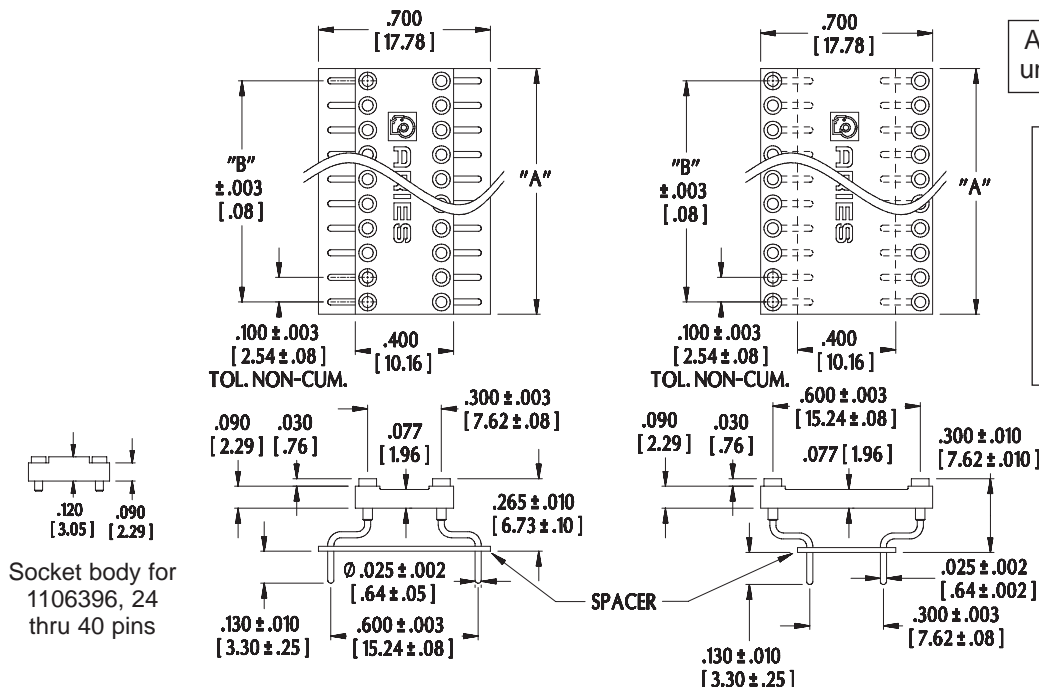

All tolerances \pm .005 [.13] unless otherwise specified

CONTACT DETAIL



ARIES
ELECTRONICS, INC.
http://www.arieselec.com • info@arieselec.com

NORTH AMERICA
Frenchtown, NJ USA
TEL: (908) 996-6841
FAX: (908) 996-3891



EUROPE
TEL: +44 870 240 0249
FAX: +44 871 919 6033
europe@arieselec.com



12030
REV.E

PRINTOUTS OF THIS DOCUMENT MAY BE OUT OF DATE AND SHOULD BE CONSIDERED UNCONTROLLED