

JC 120 Single-axis Fingertip Joystick



Creative solutions
for position measurement and control

Conductive Plastic Technology

JOYSTICK CONTROLLERS

Developed for applications where ergonomics and system integrity are paramount, the JC120 is a minimum width, low profile joystick that provides smooth, precise fingertip control in one axis. The low profile lever makes the JC120 less susceptible to unintentional operation and the minimal under panel space makes it ideal for mounting in panels and operator arm rests. The JC120 is sealed to IP66 to enable it to operate in extreme environments.

- Slim profile
- Simple to install
- Long operating life
- Superior reliability
- Rapid despatch

Innovative design

Designed for use with electronic controllers the joystick generates analogue and switched reference signals proportional to the distance and direction over which the handle is moved. The output is configured to provide signals for fault detection circuits and a centre tap provides an accurate voltage reference for the lever in its released position, or a zero point for a bipolar supply voltage. An electrically independent switch operates with separate contacts each side of the lever centre position.

Typical applications include remote control chest packs and the control of off-highway or material handling equipment.

Total reliability

the JC120 joystick incorporates conductive plastic track technology which provides absolute position control and facilitates a maintenance free operating life in excess of five million cycles.

Features	Benefits
<ul style="list-style-type: none"> • Width only 26.5mm • Ergonomic design • Choice of low profile lever heights <ul style="list-style-type: none"> • Long life • Sealed to IP66 • Choice of output voltage ranges 	<ul style="list-style-type: none"> • Increased control density • Reduced operator fatigue • Unintentional operation reduced • Maintenance free operation • Operation in hostile environments • Maximum interface flexibility



NO MAINTENANCE

JOYSTICK CONTROLLERS

SINGLE-AXIS

Selection Guide

Penny+Giles offers the widest choice of options to suit your application.



Rapid Despatch




JC 120 - Short lever

The JC 120 supplied with the short lever presents the lowest profile, ensuring less susceptibility to unintentional operation.



JC 120 - Long lever

The JC 120 supplied with the long lever provides increased fingertip control, but still ensures a lower lever profile than the JC 100 model.



JC 120 - Connector

The JC 120 is supplied with a 7 pin latching connector for easy installation. The mating connector assembly is ordered separately.



EMC Directive 89/336/EEC

The products detailed in this document are supplied as components for installation into an electrical apparatus or system. They are outside the scope of the EEC directive and will not be CE marked.

PERFORMANCE

MECHANICAL

Breakout force (at handle tip)
Operating force (at tip, full deflection)
Maximum allowable force
Lever operating angle
Lever action
Expected life (operations)
Weight

Short handle

3.1N
5.1N
50N
±30°
self centring
>5 million
45g

Long handle

2.3N
3.4N
35N
±30°
self centring
>5 million
45g

ENVIRONMENTAL

Operating temperature
Storage temperature
Environmental sealing above the flange

-25° to +70°C
-40° to +85°C

IP66 - BS EN 60529†

ELECTRICAL

Analogue track

Electrical angle of movement
Total track resistance
Supply voltage - maximum (Vs)
Wiper current - maximum
Power dissipation - maximum
Wiper circuit impedance
Output voltage
Resolution
Centre tap voltage (no load)
Centre tap angle
Insulation resistance

±28°
4kΩ or 5kΩ (±20%)
35Vd.c.
5mA (non derangement)
0.25W at 20°C
200kΩ minimum
0% to 100%Vs 10% to 90%Vs 25% to 75%Vs
Virtually infinite
50%Vs ±2%
±2.5° either side of centre (±1° tolerance)
>50MΩ at 500Vd.c.

Switch

Switch operating angle
Supply voltage - maximum
Load resistance - minimum
Load current - maximum (resistive)
Typical contact resistance
Connection
Mating Connector

5° either side of centre (±1° tolerance)
35Vdc
10kΩ
2mA
150Ω
7 pin Molex series latching male
7 pin Molex series latching female, with 0.5m leads (order separately as SA301649)

CUSTOM BUILD OPTIONS


Lever return to one end.

ORDERING CODES


<i>Short handle</i>	0% to 100% output voltage range	JC120-0001 (4k)
	10% to 90% output voltage range	JC120-0002 (5k)
	25% to 75% output voltage range	JC120-0003 (5k)
<i>Long handle</i>	0% to 100% output voltage range	JC120-0004 (4k)
	10% to 90% output voltage range	JC120-0005 (5k)
	25% to 75% output voltage range	JC120-0006 (5k)
<i>Connector</i>	7 way mating connector with 0.5m flyleads	SA301649 (order separately)

DIMENSIONS AND MOUNTING OPTIONS

† Seal integrity can only be achieved when using sealing gasket supplied and screws are tightened to 1Nm (9lbf/in)

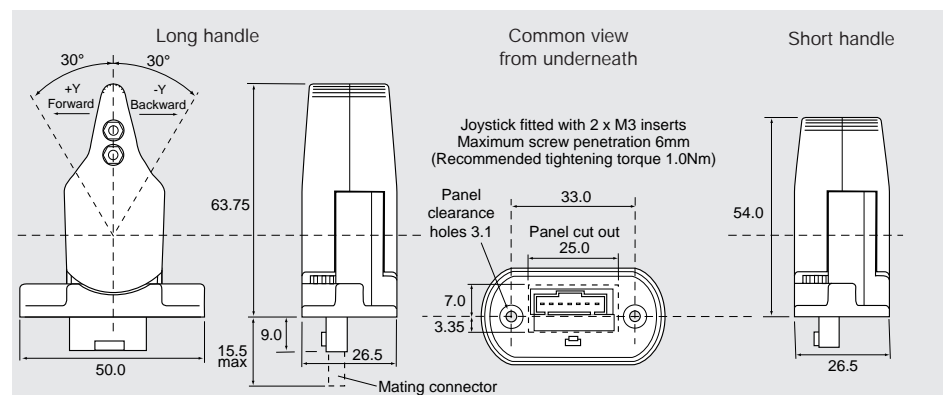

ELECTRICAL CONNECTIONS



Description	Pin Number	Mating Connector/Flylead colour
Centre tap	A	Orange
Positive voltage supply	B	Yellow
Output voltage signal	C	Green
Negative or zero voltage supply	D	Blue
N/O switch, handle backward (-Y)	E	Red
N/O switch, handle forward (+Y)	F	White
Common terminal for switch	G	Black

Available from Penny+Giles


A wide range of instrumentation for measurement and control solutions in industrial and aerospace applications. Please ask for more details.

Penny+Giles quality systems meet the requirements of ISO9001, the Civil Aviation Authority and numerous customer's certification standards.

Quality is at the heart of all our systems ensuring the reliability of our products from initial design to final despatch.




Certificate No. LRQA 0965179



- Linear Potentiometers ■ Rotary Potentiometers ■ LVDTs ■ RVDTs ■ Joystick Controllers
- In-Cylinder Transducers ■ Digital Panel Indicators ■ Solenoids

Contact Worldwide



WEB SITE
www.pennyandgiles.com

UNITED KINGDOM
Penny+Giles Controls Ltd
36 Nine Mile Point Industrial Estate
Cwmfelinfach
Gwent NP11 7HZ
Tel: +44 (0) 1495 202000
Fax: +44 (0) 1495 202006
Email: sales@pennyandgiles.com

USA
Penny+Giles Controls Inc
12701 Schabarum Avenue
Irwindale CA 91706
Telephone: +1 626 337 0400
Fax: +1 626 337 0469
Email: us.sales@pennyandgiles.com

GERMANY
Penny+Giles GmbH
Straussenlettenstr. 7b
85053 Ingolstadt
Telephone: +49 (0) 841 61000
Fax: +49 (0) 841 61300
Email: info@penny-giles.de

Penny+Giles products are in service with these industries throughout the world.

Aerospace
Automotive
Construction
Defence
Leisure
Marine
Material handling
Mining

Motorsport
Off-highway
Petrochemical
Plastics and Rubber
Power generation
Process control
Transportation
Timber and Forestry

**CURTISS
WRIGHT Controls, Inc.**
Integrated Sensing

Penny+Giles

A Curtiss-Wright Company

The information contained in this brochure on product applications should be used by customers for guidance only. Penny & Giles Controls Ltd. makes no warranty or representation in respect of product fitness or suitability for any particular design application, environment, or otherwise, except as may subsequently be agreed in a contract for the sale and purchase of products. Customer's should therefore satisfy themselves of the actual performance requirements and subsequently the products suitability for any particular design application and the environment in which the product is to be used.

Continual research and development may require change to products and specification without prior notification. All trademarks acknowledged

© Penny+Giles Controls Ltd 2004