
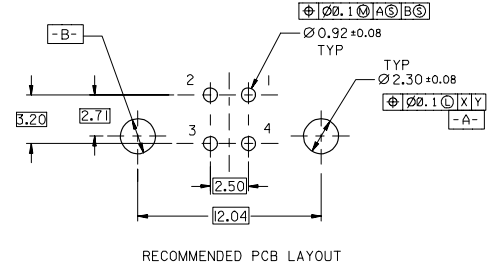
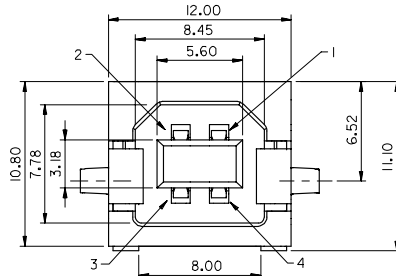
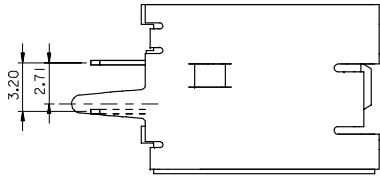



NOT FOR IR REFLOW PROCESS

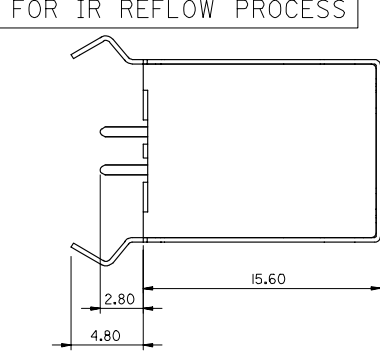

- NOTES :
- MATERIAL :
 - HOUSING : HIGH TEMP. NYLON , GLASS FIBRE FILLED, UL94-V0 , COLOR:BLACK POLYESTER , GLASS FIBRE FILLED, UL94-V0 , COLOR: WHITE
 - TERMINAL : PHOSPHOR BRONZE
 - METAL SHELL : COPPER ALLOY
 - PLATING :
 - TERMINAL :
 - CONTACT AREA : (a) GOLD FLASH, THICKNESS= 30 MICROINCH MINIMUM.
 - (b) GOLD (Au), THICKNESS= 50 MICROINCH MINIMUM. /0.76 MICROMETER MINIMUM.
 - SOLDER TAIL : (a) TIN-LEAD(Sn-Pb)ALLOY, THICKNESS= 150 MICROINCH MINIMUM . /3.8 MICROMETER MINIMUM.
 - (b) PURE TIN PLATING THICKNESS= 50 MICRONCH MINIMUM /1.27 MICROMETER MINIMUM.
 - UNDER PLATE : NICKEL (Ni), THICKNESS= 50 MICROINCH MINIMUM. /1.27 MICROMETER MINIMUM.
 - METAL SHELL :
 - (a) TIN-LEAD (Sn-Pb) ALLOY, THICKNESS= 100 MICROINCH MINIMUM. /2.54 MICROMETER MINIMUM.
 - (b) PURE TIN PLATING, THICKNESS= 50 MICROINCH MINIMUM /1.27 MICROMETER.
 - UNDER PLATE : NICKEL (Ni), THICKNESS= 50 MICROINCH MINIMUM. /1.27 MICROMETER MINIMUM.
 - 3 RECOMMENDED PCB THICKNESS : 1.60±0.05mm
 - 4 PRODUCT SPECIFICATION : REFER TO PS-67998-0000

PART NUMBER LEGEND:

P/N	COLOR	CONTACT PLATING	SHELL AND SOLDER TAL PLATING
67171-0000	BLACK	GOLD FLASH	TIN-LEAD PLATING
67171-0001	BLACK	0.76 MICROMETER/ 30 MICROINCH GOLD	
67171-2000	BLACK	GOLD FLASH	PURE TIN PLATING (LEAD-FREE)
67171-2001	BLACK	0.76 MICROMETER/ 30 MICROINCH GOLD	
67171-3000	WHITE	GOLD FLASH	
67171-3001	WHITE	0.76 MICROMETER/ 30 MICROINCH GOLD	

DELETE NON ROHS PRODUCTS EC NO. SH2006-0759 DRW:WYANG05 CHK:CHANG APPR: JINCHEN 2006/10/26 2006/10/28 2006/11/14	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>± .005</td> <td>± .0002</td> </tr> <tr> <td>3 PLACES</td> <td>± .008</td> <td>± .0003</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.25</td> <td>± .010</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.25</td> <td>± .010</td> </tr> <tr> <td colspan="3">ANGULAR ± 3 °</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	± .005	± .0002	3 PLACES	± .008	± .0003	2 PLACES	± 0.25	± .010	1 PLACE	± 0.25	± .010	ANGULAR ± 3 °			DIMENSION STYLE MM ONLY	SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm	INCH																					
	4 PLACES	± .005	± .0002																					
	3 PLACES	± .008	± .0003																					
2 PLACES	± 0.25	± .010																						
1 PLACE	± 0.25	± .010																						
ANGULAR ± 3 °																								
DRAWN BY VL IN 1998/05/06		DATE 1998/05/06	TITLE USB B VERTICAL CONNECTOR																					
CHECKED BY VL IN 1998/05/06		DATE 1998/05/06	MOLEX INCORPORATED																					
APPROVED BY MEGA LIN 1998/05/06		DATE 1998/05/06	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-67171-001	SHEET NO. 1 OF 1																			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																								
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																								