

RMPA0959 CDMA and CDMA2000-1X PowerEdge™ Power Amplifier Module

Features

- Single positive-supply operation with low power and shut-down modes
- 39% CDMA efficiency at +28dBm average output power
- 53% AMPS mode efficiency at +31dBm output power
- Lead-free RoHS compliant 4 x 4 x 1.5mm leadless
- Internally matched to 50Ω and DC blocked RF input/output
- Meets CDMA2000-1XRTT performance requirements


General Description

The RMPA0959 power amplifier module (PAM) is designed for cellular band AMPS, CDMA and CDMA2000-1X applications. The 2 stage PAM is internally matched to 50Ω to minimize the use of external components and features a low-power mode to reduce standby current and DC power consumption during peak phone usage. High power-added efficiency and excellent linearity are achieved using our Heterojunction Bipolar Transistor (HBT) process.

Device



Functional Block Diagram

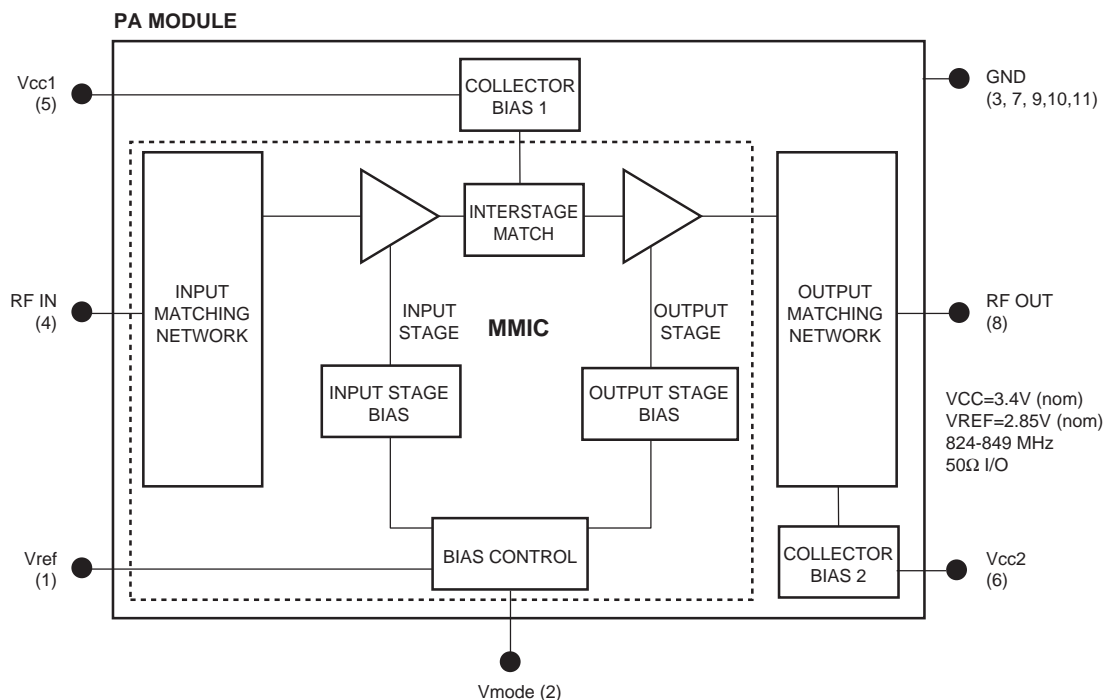

Absolute Ratings¹

| Symbol | Parameter | Ratings | Units |
|------------|-----------------------|-------------|-------|
| Vcc1, Vcc2 | Supply Voltages | 5.0 | V |
| Vref | Reference Voltage | 2.6 to 3.5 | V |
| Vmode | Power Control Voltage | 3.5 | V |
| Pin | RF Input Power | +10 | dBm |
| Tstg | Storage Temperature | -55 to +150 | °C |

Notes:

No permanent damage with one parameter set at extreme limit. Other parameters set to typical values.

Electrical Characteristics¹

| Symbol | Parameter | Min | Typ | Max | Units | Comments |
|--------------------------------|------------------------------------------|-----|-------|-------|------------|------------------------------|
| f | Operating Frequency | 824 | | 849 | MHz | |
| CDMA Operation | | | | | | |
| SSg | Small-Signal Gain | 25 | 26.5 | | dB | Po = 0 dBm |
| Gp | Power Gain | 26 | 29 | | dB | Po = +28 dBm; Vmode = 0V |
| | | | 25 | | dB | Po = +16 dBm; Vmode ≥ 2.0V |
| Po | Linear Output Power | 28 | | | dBm | Vmode = 0V |
| | | 16 | | | dBm | Vmode ≥ 2.0V |
| PAEd | PAE (digital) @ +28 dBm | | 39 | | % | Vmode = 0V |
| | PAE (digital) @ +16 dBm | | 8.5 | | % | Vmode ≥ 2.0V |
| | PAEd (digital) @ +16 dBm | | 20 | | % | Vmode ≥ 2.0V, Vcc = 1.5 V |
| Itot | High Power Total Current | | 475 | | mA | Po = +28 dBm, Vmode = 0V |
| | Low Power Total Current | | 130 | | mA | Po = +16 dBm, Vmode = 2.0V |
| | Adjacent Channel Power Ratio | | | | | IS-95 A/B Modulation |
| ACPR1 | ±885 KHz Offset | | -55 | | dBc | Po = +28 dBm; Vmode = 0V |
| | | | -57 | | dBc | Po = +16 dBm; Vmode ≥ 2.0V |
| ACPR2 | ±1.98 MHz Offset | | -60 | | dBc | Po = +28 dBm; Vmode = 0V |
| | | | -70 | | dBc | Po = +16 dBm; Vmode ≥ 2.0V |
| AMPS Operation | | | | | | |
| Gp | Power Gain | 26 | 27.5 | | | Po = +31 dBm |
| PAEa | Power-Added Efficiency (analog) | | 53 | | % | Po = +31 dBm |
| General Characteristics | | | | | | |
| VSWR | Input Impedance | | 2.0:1 | 2.5:1 | | |
| NF | Noise Figure | | 4 | | dB | |
| Rx No | Receive Band Noise Power | | -134 | | dBm/ Hz | Po ≤ +28 dBm; 869 to 894 MHz |
| 2fo-5fo | Harmonic Suppression ³ | | | -30 | dBc | Po ≤ +28 dBm |
| S | Spurious Outputs ^{2,3} | | | -60 | dBc | Load VSWR ≤ 5.0:1 |
| | Ruggedness w/ Load Mismatch ³ | | | 10:1 | | No permanent damage. |
| Tc | Case Operating Temperature | -30 | | 85 | °C | |
| DC Characteristics | | | | | | |
| Iccq | Quiescent Current | | 62 | | mA | Vmode ≥ 2.0V |
| Iref | Reference Current | | 5 | 8 | mA | Po ≤ +28 dBm |
| Icc(off) | Shutdown Leakage Current | | <1 | 5 | uA | No applied RF signal. |










Notes:

1. All parameters met at Tc = +25°C, Vcc = +3.4V, Vref = 2.85V and load VSWR ≤ 1.2:1, unless otherwise noted.
2. All phase angles.
3. Guaranteed by design.



Recommended Operating Conditions

| Symbol | Parameter | Min | Typical | Max | Units |
|------------|----------------------------|--------------|---------|-----|-------|
| f | Operating Frequency | 824 | | 849 | MHz |
| Vcc1, Vcc2 | Supply Voltage | 3.0 | 3.4 | 4.2 | V |
| Vref | Reference Voltage | (operating) | 2.7 | 3.1 | V |
| | | (shutdown) | 0 | 0.5 | V |
| Vmode | Bias Control Voltage | (low-power) | 1.8 | 3.0 | V |
| | | (high-power) | 0 | 0.5 | V |
| Pout | Linear Output Power | (high-power) | | +28 | dBm |
| | | (low-power) | | +16 | dBm |
| Tc | Case Operating Temperature | -30 | | +85 | °C |

Typical Characteristics

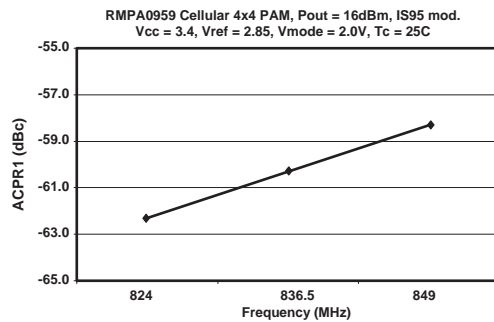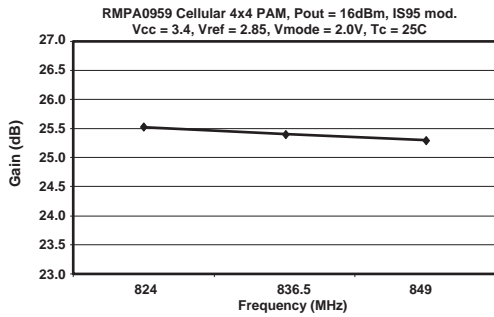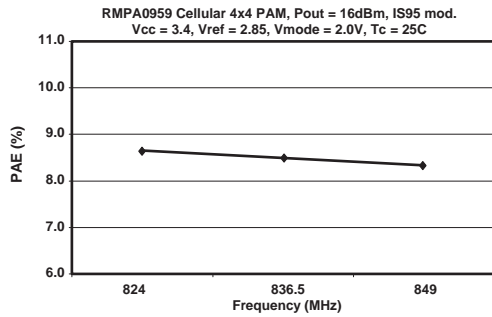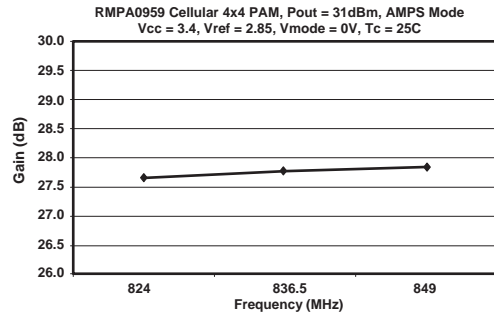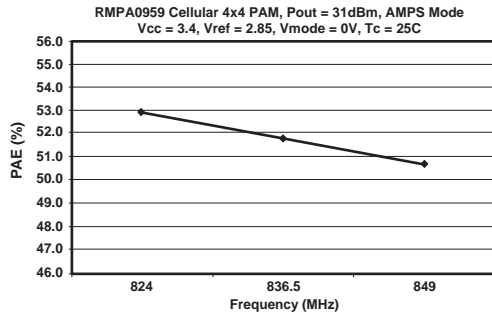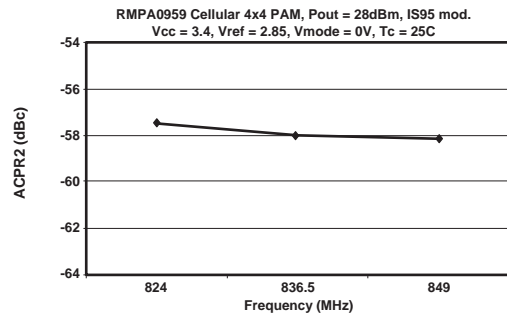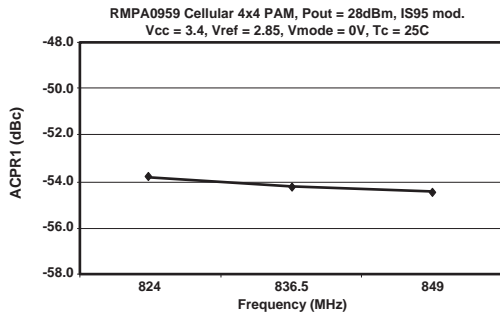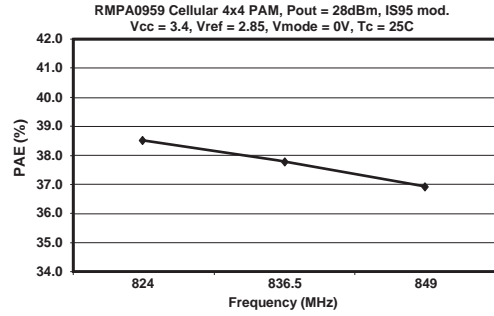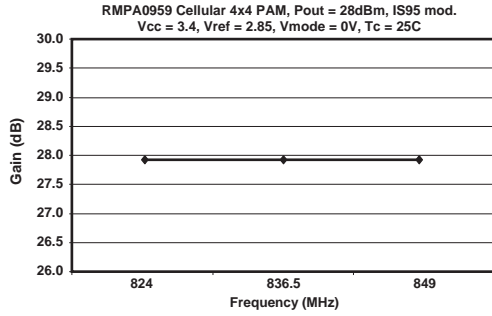

Typical Characteristics (Continued)



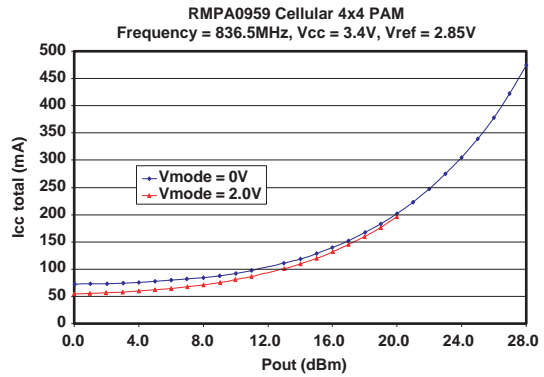
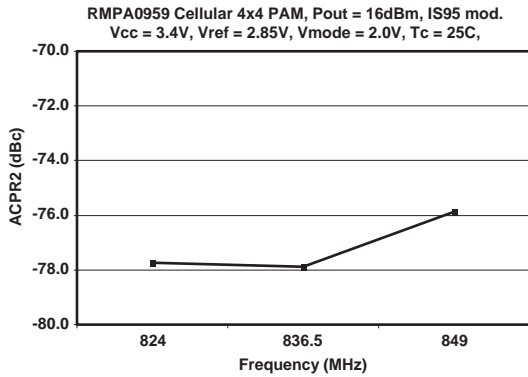


Efficiency Improvement Applications









In addition to high-power/low-power bias modes, the efficiency of the PA module can be significantly increased at backed-off RF power levels by dynamically varying the supply voltage (Vcc) applied to the amplifier. Since mobile handsets and power amplifiers frequently operate at 10-20 dB back-off, or more, from maximum rated linear power, battery life is highly dependent on the DC power consumed at antenna power levels in the range of 0 to +16dBm. The reduced demand on transmitted RF power allows the PA supply voltage to be reduced for improved efficiency, while still meeting linearity requirements for CDMA modulation with excellent margin. High-efficiency DC-DC converters are now available to implement switched-voltage operation.

The following charts show measured performance of the PA module in low-power mode (Vmode = +2.0V) at +16dBm output power and over a range of supply voltages from 3.4V nominal down to 1.5V over temp. Power-added efficiency is more than doubled from 9.5 percent to nearly 20 percent (Vcc = 1.5V) while maintaining a typical ACPR1 of -52dBc and ACPR2 of less than -61dBc.

Operation at even lower levels of Vcc supply voltage are possible with a further restriction on the maximum RF output power. The PA module can be biased at a supply voltage of as low as 0.7V with an efficiency as high as 10-12 percent at +8dBm output power. Excellent signal linearity is still maintained even under this low supply voltage condition.

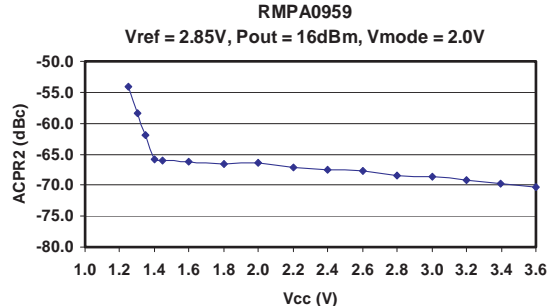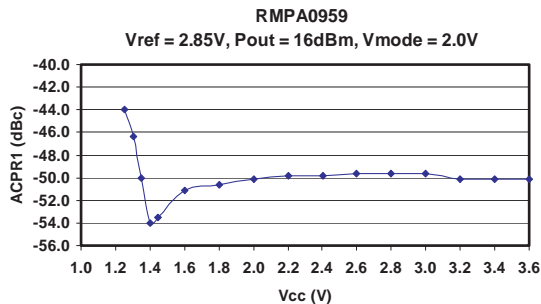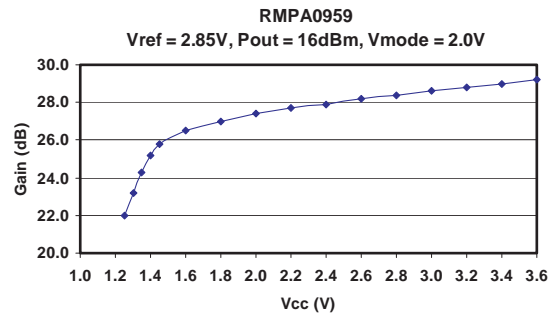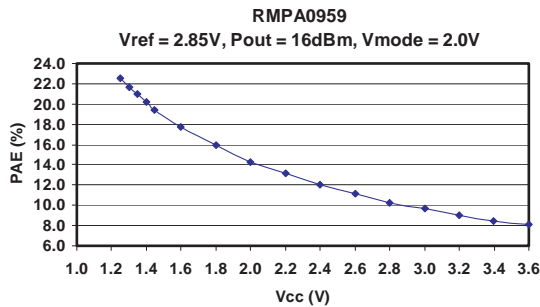


Efficiency Improvement Applications (continued)

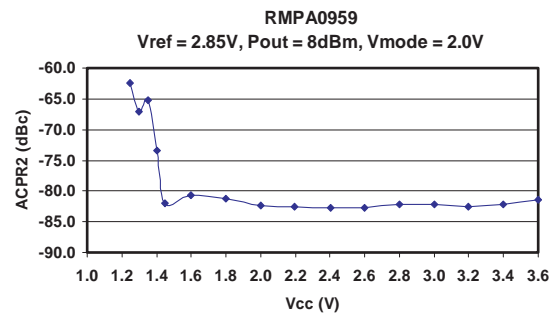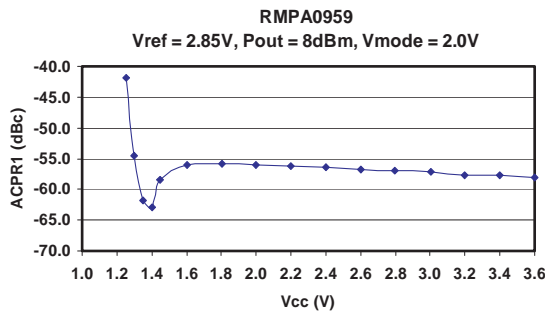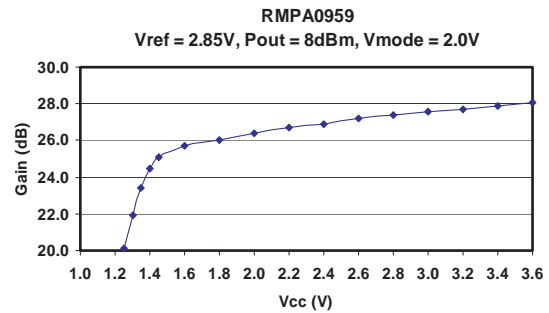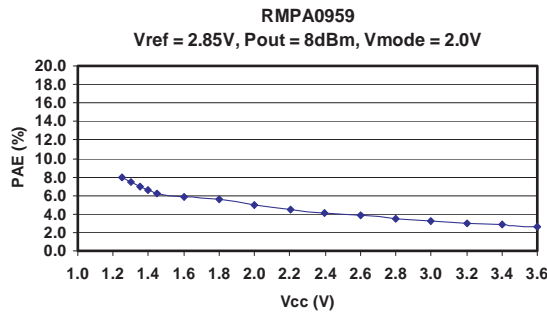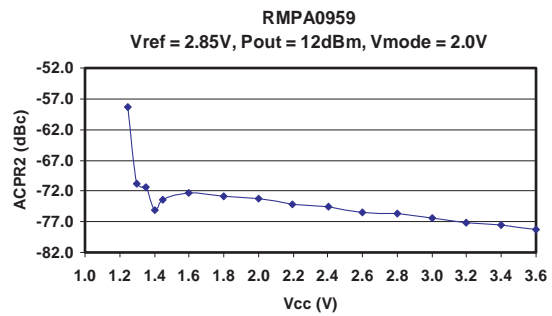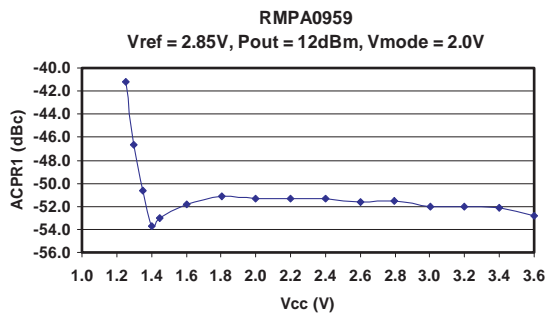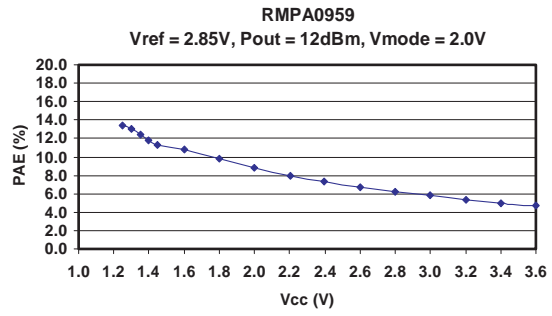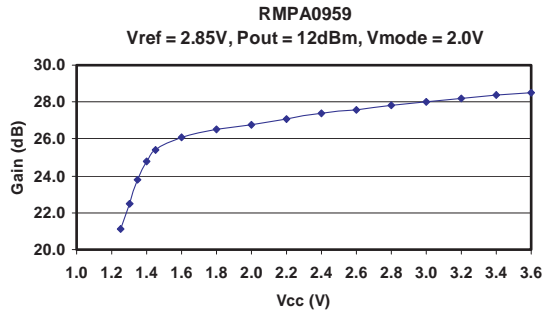


Efficiency Improvement Applications (continued)


RMPA0959 Cellular 4x4 PAM
Pout = 16dBm, Vref = 2.85V, TC = 25C, Vmode = 2.0V

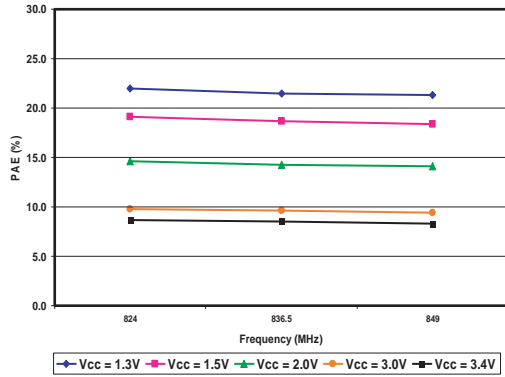


RMPA0959 Cellular 4x4 PAM
Pout = 16dBm, Vref = 2.85V, TC = 25C, Vmode = 2.0V

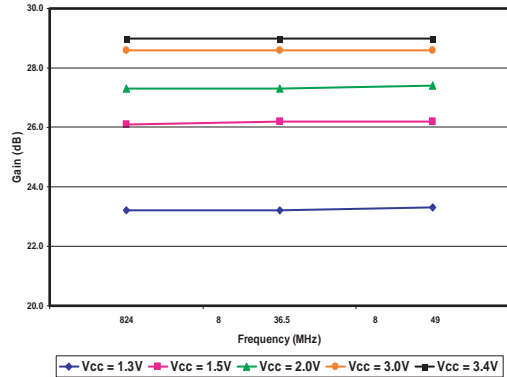

RMPA0959 Cellular 4x4 PAM
Pout = 16dBm, Vref = 2.85V, TC = 25C, Vmode = 2.0V

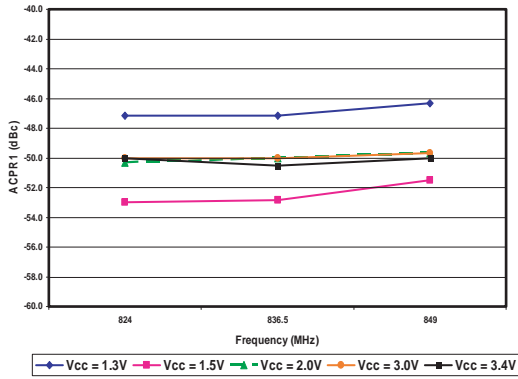


RMPA0959 Cellular 4x4 PAM
Pout = 16dBm, Vref = 2.85V, TC = 25C, Vmode = 2.0V

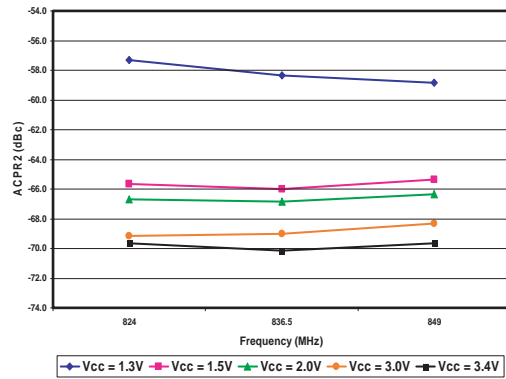

Signal Descriptions

| Pin # | Symbol | Description |
|-------|--------|-----------------------------------|
| 1 | Vref | Supply Voltage to Input Stage |
| 2 | Vmode | RF Input Signal |
| 3 | GND | Ground |
| 4 | RF In | High-Power/Low-Power Mode Control |
| 5 | Vcc1 | Reference Voltage |
| 6 | Vcc2 | Supply Voltage to Output Stage |
| 7 | GND | Ground |
| 8 | RF Out | RF Output Signal |
| 9 | GND | Ground |
| 10 | GND | Ground |
| 11 | GND | Paddle Ground |

Evaluation Board Layout

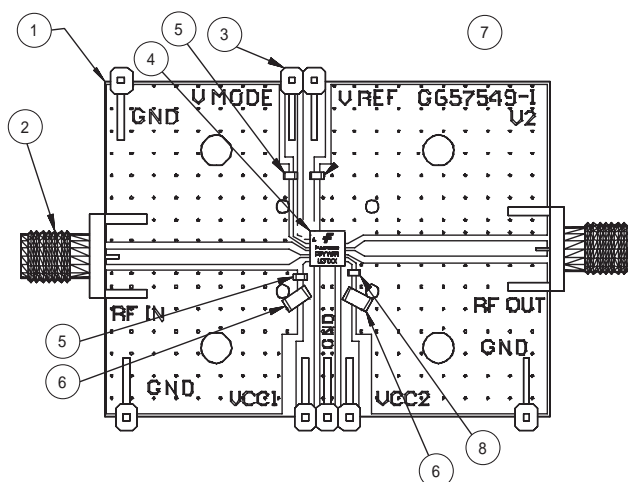


Materials and DC Turn-On Sequence

| Qty. | Item No. | Part Number | Description | Vendor |
|------|----------|-----------------|-------------------------|--------------|
| 1 | 1 | G507548-1 V2 | PC, BOARD | Fairchild |
| 2 | 2 | #142-0701-841 | SMA Connector | Johnson |
| 5 | 3 | #234D-5211TN | Terminals | 3M |
| Ref | 4 | G57583 | Assembly, RMPA0959 | Fairchild |
| 2 | 5 | GRM39X7R102K50V | 1000pF Capacitor (D603) | Murata |
| 2 | 5 (Alt) | ECJ-1VB1H1D2K | 1000pF Capacitor (D603) | Panasonic |
| 2 | 6 | C3216X5R1A335M | 3.3 μF Capacitor (1206) | TDK |
| 1 | 7 | GRM39Y5V104Z16V | 0.1μF Capacitor (0603) | Murata |
| 1 | 7 (Alt) | ECJ-1VBC104K | 0.1μF Capacitor (0603) | Panasonic |
| 1 | 8 | GRM39X7R331K50V | 330pF Capacitor (0603) | Murata |
| A/R | 9 | SN83 | Solder Paste | Indium Corp. |
| A/R | 10 | SN86 | Solder Paste | Indium Corp. |


DC Turn on Sequence:

- 1) Vcc1 = Vcc2 = 3.4V (typical)
- 2) Vref = 2.85V (typical)
- 3) High-Power: Vmode = 0V (Pout > 16dBm)
Low-Power: Vmode = 2.0V (Pout < 16dBm)

Evaluation Board Schematic

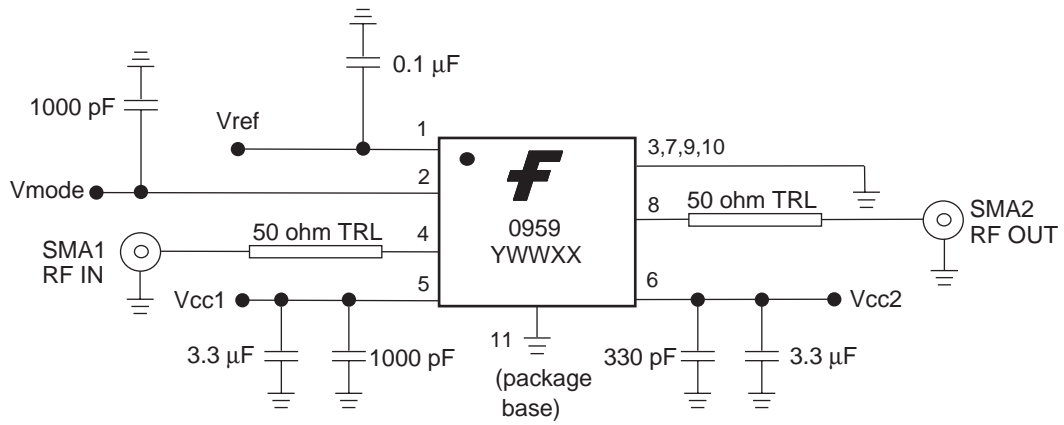

Package Outline

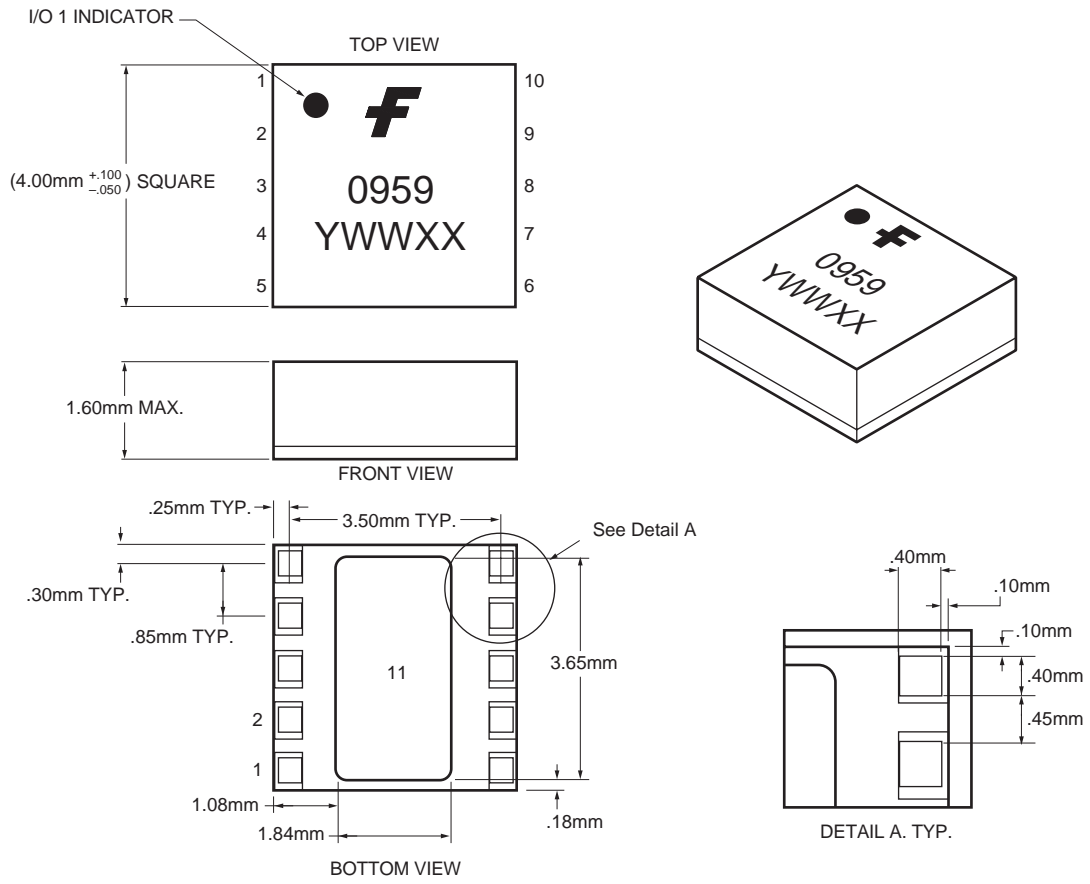

Application Information

CAUTION: THIS IS AN ESD SENSITIVE DEVICE

Precautions to Avoid Permanent Device Damage:

- Cleanliness: Observe proper handling procedures to ensure clean devices and PCBs. Devices should remain in their original packaging until component placement to ensure no contamination or damage to RF, DC & ground contact areas.
- Device Cleaning: Standard board cleaning techniques should not present device problems provided that the boards are properly dried to remove solvents or water residues.
- Static Sensitivity: Follow ESD precautions to protect against ESD damage:
 - A properly grounded static-dissipative surface on which to place devices.
 - Static-dissipative floor or mat.
 - A properly grounded conductive wrist strap for each person to wear while handling devices.
- General Handling: Handle the package on the top with a vacuum collet or along the edges with a sharp pair of bent tweezers. Avoiding damaging the RF, DC, & ground contacts on the package bottom. Do not apply excessive pressure to the top of the lid.
- Device Storage: Devices are supplied in heat-sealed, moisture-barrier bags. In this condition, devices are protected and require no special storage conditions. Once the sealed bag has been opened, devices should be stored in a dry nitrogen environment.

Device Usage:

Fairchild recommends the following procedures prior to assembly.

- Dry-bake devices at 125°C for 24 hours minimum. Note: The shipping trays cannot withstand 125°C baking temperature.
- Assemble the dry-baked devices within 7 days of removal from the oven.
- During the 7-day period, the devices must be stored in an environment of less than 60% relative humidity and a maximum temperature of 30°C
- If the 7-day period or the environmental conditions have been exceeded, then the dry-bake procedure must be repeated.

Solder Materials & Temperature Profile: Reflow soldering is the preferred method of SMT attachment. Hand soldering is not recommended.

- Reflow Profile
 - Ramp-up: During this stage the solvents are evaporated from the solder paste. Care should be taken to prevent rapid oxidation (or paste slump) and solder bursts caused by violent solvent out-gassing. A typical heating rate is 1-2°C/sec.
 - Pre-heat/soak: The soak temperature stage serves two purposes; the flux is activated and the board and devices achieve a uniform temperature. The recommended soak condition is: 120-150 seconds at 150°C.
 - Reflow Zone: If the temperature is too high, then devices may be damaged by mechanical stress due to thermal mismatch or there may be problems due to excessive solder oxidation. Excessive time at temperature can enhance the formation of inter-metallic compounds at the lead/board interface and may lead to early mechanical failure of the joint. Reflow must occur prior to the flux being completely driven off. The duration of peak reflow temperature should not exceed 10 seconds. Maximum soldering temperatures should be in the range 215-220°C, with a maximum limit of 225°C.
 - Cooling Zone: Steep thermal gradients may give rise to excessive thermal shock. However, rapid cooling promotes a finer grain structure and a more crack-resistant solder joint. The illustration below indicates the recommended soldering profile.

Solder Joint Characteristics:

Proper operation of this device depends on a reliable void-free attachment of the heatsink to the PWB. The solder joint should be 95% void-free and be a consistent thickness.

Rework Considerations:

Rework of a device attached to a board is limited to reflow of the solder with a heat gun. The device should not be subjected to more than 225°C and reflow solder in the molten state for more than 5 seconds. No more than 2 rework operations should be performed.

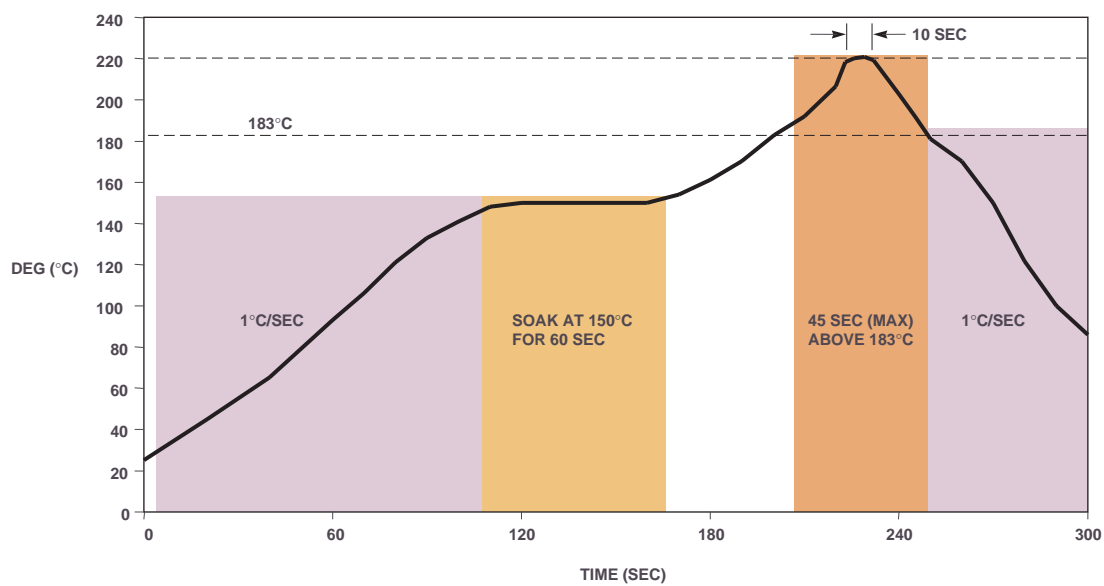


Figure 1. Recommended Solder Reflow Profile

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

| | | | | |
|--------------------------------------|---------------------|---------------|---------------------|-----------------|
| ACEx™ | FAST® | ISOPLANAR™ | PowerSaver™ | SuperSOT™-6 |
| ActiveArray™ | FASTr™ | LittleFET™ | PowerTrench® | SuperSOT™-8 |
| Bottomless™ | FPS™ | MICROCOUPLER™ | QFET® | SyncFET™ |
| Build it Now™ | FRFET™ | MicroFET™ | QST™ | TCM™ |
| CoolFET™ | GlobalOptoisolator™ | MicroPak™ | QT Optoelectronics™ | TinyLogic® |
| CROSSVOLT™ | GTO™ | MICROWIRE™ | Quiet Series™ | TINYOPTO™ |
| DOME™ | HiSeC™ | MSX™ | RapidConfigure™ | TruTranslation™ |
| EcoSPARK™ | I ² C™ | MSXPro™ | RapidConnect™ | UHC™ |
| E ² CMOS™ | i-Lo™ | OCX™ | μSerDes™ | UltraFET® |
| EnSigna™ | ImpliedDisconnect™ | OCXPro™ | ScalarPump™ | UniFET™ |
| FACT™ | IntelliMAX™ | OPTOLOGIC® | SILENT SWITCHER® | VCX™ |
| FACT Quiet Series™ | | OPTOPLANAR™ | SMART START™ | Wire™ |
| Across the board. Around the world.™ | | PACMAN™ | SPM™ | |
| The Power Franchise® | | POPT™ | Stealth™ | |
| Programmable Active Droop™ | | Power247™ | SuperFET™ | |
| | | PowerEdge™ | SuperSOT™-3 | |

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

| Datasheet Identification | Product Status | Definition |
|--------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| Obsolete | Not In Production | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only. |

Rev. I18