

# Series I Thermistors

2.2 to 100K Ohms Resistance @25°C  
 Thermally Conductive Epoxy Coating  
 Choice of 4 Temperature Tolerance  
 Classifications  
 Low Cost

## SERIES I THERMISTORS

The BetaCURVE chip is soldered to 32 AWG Alloy 180 leads and encapsulated in Stycast epoxy resin

## FEATURES


- 2.2 to 100K Ohms Resistance @25°C
- Proven Stability and Reliability
- Alloy lead wires for reduced thermal conductivity
- Interchangeability
- Thermally conductive epoxy coating
- Temperature range -40°C to +125°C
- RoHS Compliant

## APPLICATIONS

- Tight tolerance instrumentation
- Temperature sensing, control and compensation
- Assembly into probes for a wide variety of applications
- General instrumentation applications



## Dimensions

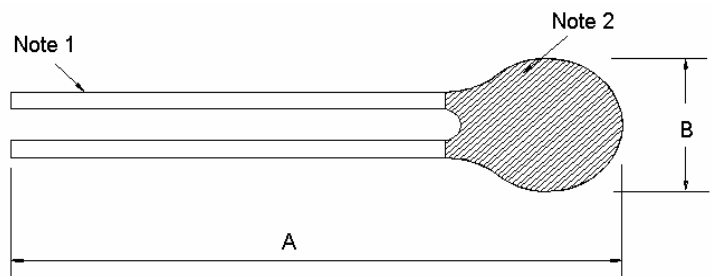

	Dimensions	
	A	B
	76 ± 2mm	2.4mm Max
<b>Note 1</b>	32 AWG Solid Alloy 180 Leads	
<b>Note 2</b>	Stycast 2850ft Epoxy	

# Series I Thermistors

## Product Definition

Part Number	Color Coding	Resistance [Ω] @ +25°C	Tolerance from 0 to +70°C	Alpha Value @ +25°C	Beta Value 25/85	Beta Tolerance	Dissipation Constant in still air @ +25°C	Time response (Stirred Oil)
<a href="#">2.2K3A1A</a>	Brown	2,252	±0.1°C	-4.39 %/ °C	3976	±0.5%	0.75 mW/°C	<1 second
<a href="#">2.2K3A1B</a>			±0.2°C					
<a href="#">2.2K3A1C</a>			±0.5°C					
<a href="#">2.2K3A1D</a>			±1.0°C					
<a href="#">3K3A1A</a>	Red	3,000	±0.1°C	-4.39 %/ °C	3976	±0.5%	0.75 mW/°C	<1 second
<a href="#">3K3A1B</a>			±0.2°C					
<a href="#">3K3A1C</a>			±0.5°C					
<a href="#">3K3A1D</a>			±1.0°C					
<a href="#">5K3A1A</a>	Orange	5,000	±0.1°C	-4.39 %/ °C	3976	±0.5%	0.75 mW/°C	<1 second
<a href="#">5K3A1B</a>			±0.2°C					
<a href="#">5K3A1C</a>			±0.5°C					
<a href="#">5K3A1D</a>			±1.0°C					
<a href="#">10K3A1A</a>	Yellow	10,000	±0.1°C	-4.39 %/ °C	3976	±0.5%	0.75 mW/°C	<1 second
<a href="#">10K3A1B</a>			±0.2°C					
<a href="#">10K3A1C</a>			±0.5°C					
<a href="#">10K3A1D</a>			±1.0°C					
<a href="#">10K4A1A</a>	Black	10,000	±0.1°C	-4.04 %/ °C	3694	±0.5%	0.75 mW/°C	<1 second
<a href="#">10K4A1B</a>			±0.2°C					
<a href="#">10K4A1C</a>			±0.5°C					
<a href="#">10K4A1D</a>			±1.0°C					
<a href="#">30K5A1A</a>	White	30,000	±0.1°C	-4.30 %/ °C	3942	±0.5%	0.75 mW/°C	<1 second
<a href="#">30K5A1B</a>			±0.2°C					
<a href="#">30K5A1C</a>			±0.5°C					
<a href="#">30K5A1D</a>			±1.0°C					
<a href="#">30K6A1A</a>	Green	30,000	±0.1°C	-4.68 %/ °C	4261	±0.5%	0.75 mW/°C	<1 second
<a href="#">30K6A1B</a>			±0.2°C					
<a href="#">30K6A1C</a>			±0.5°C					
<a href="#">30K6A1D</a>			±1.0°C					
<a href="#">50K6A1A</a>	Blue	50,000	±0.1°C	-4.68 %/ °C	4261	±0.5%	0.75 mW/°C	<1 second
<a href="#">50K6A1B</a>			±0.2°C					
<a href="#">50K6A1C</a>			±0.5°C					
<a href="#">50K6A1D</a>			±1.0°C					
<a href="#">100K6A1A</a>	Violet	100,000	±0.1°C	-4.68 %/ °C	4261	±0.5%	0.75 mW/°C	<1 second
<a href="#">100K6A1B</a>			±0.2°C					
<a href="#">100K6A1C</a>			±0.5°C					
<a href="#">100K6A1D</a>			±1.0°C					

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

## Ordering Information

### NORTH AMERICA

Measurement Specialties, Inc.  
910 Turnpike Road  
Shrewsbury, MA 01545  
Tel: 1-508-842-0516  
Fax: 1-508-842-0342

Sales email:  
[temperature.sales.amer@meas-spec.com](mailto:temperature.sales.amer@meas-spec.com)

### EUROPE

Measurement Specialties, Inc  
Ballybrit Business Park  
Galway Ireland  
Tel: +353-91-753238  
Fax: +353-91-770789

Sales email:  
[temperature.sales.emea@meas-spec.com](mailto:temperature.sales.emea@meas-spec.com)

### ASIA

Measurement Specialties (China) Ltd.  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 51807  
China  
Tel: +86 (0) 755 33305088  
Fax: +86 (0) 755 33305099

Sales email:  
[temperature.sales.asia@meas-spec.com](mailto:temperature.sales.asia@meas-spec.com)