

**Normally-OFF Trench Silicon Carbide Power JFET**



| Product Summary |       |          |
|-----------------|-------|----------|
| $BV_{DS}$       | 1200  | V        |
| $R_{DS(ON)max}$ | 0.063 | $\Omega$ |
| $E_{TS,typ}$    | 440   | $\mu J$  |

**Features:**

- Compatible with Standard Gate Driver ICs
- Positive Temperature Coefficient for Ease of Paralleling
- Temperature Independent Switching Behavior
- 150 °C Maximum Operating Temperature
- $R_{DS(on)max}$  of 0.063  $\Omega$
- Voltage Controlled
- Low Gate Charge
- Low Intrinsic Capacitance

**Applications:**

High Performance Audio

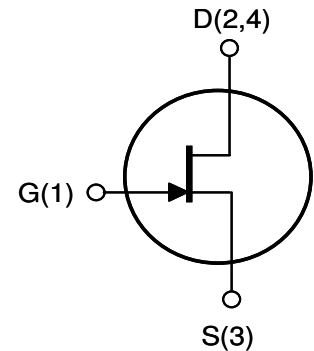

Internal Schematic

**MAXIMUM RATINGS**

| Parameter                           | Symbol            | Conditions   | Value       | Unit             |
|-------------------------------------|-------------------|--|-------------|------------------|
| Continuous Drain Current            | $I_{D, Tj=125}$   | $T_j = 125\text{ }^\circ\text{C}$                        | 30          | A                |
|                                     | $I_{D, Tj=150}$   | $T_j = 150\text{ }^\circ\text{C}$                        | 20          |                  |
| Pulsed Drain Current <sup>(1)</sup> | $I_{DM}$          | $T_C = 25\text{ }^\circ\text{C}$                         | 60          | A                |
| Short Circuit Withstand Time        | $t_{SC}$          | $V_{DD} < 800\text{ V}, T_C < 125\text{ }^\circ\text{C}$ | 50          | $\mu\text{s}$    |
| Power Dissipation                   | $P_D$             | $T_C = 25\text{ }^\circ\text{C}$                         | 250         | W                |
| Gate-Source Voltage                 | $V_{GS}$          | static   | -10 to +3   | V                |
|                                     |                   | AC <sup>(2)</sup>  | -10 to +15  | V                |
| Operating and Storage Temperature   | $T_j, T_{j, stg}$ |  | -55 to +150 | $^\circ\text{C}$ |
| Lead Temperature for Soldering      | $T_{sold}$        | 1/8" from case < 10 s                                    | 260         | $^\circ\text{C}$ |

<sup>(1)</sup> Limited by pulse width

<sup>(2)</sup>  $R_{gEXT} = 1\text{ ohm}, t_p \leq 200\text{ns}$ , see Figure 5 for static conditions

**THERMAL CHARACTERISTICS**

| Parameter                               | Symbol      | Value |     | Unit                        |
|---|-------------|-------|-----|-----------------------------|
|   |             | Typ   | Max |                             |
| Thermal Resistance, junction-to-case    | $R_{th,JC}$ | -     | 0.6 | $^\circ\text{C} / \text{W}$ |
| Thermal Resistance, junction-to-ambient | $R_{th,JA}$ | -     | 50  |                             |

**ELECTRICAL CHARACTERISTICS**

| Parameter | Symbol | Conditions | Value |     |     | Unit |
|-----------|--------|------------|-------|-----|-----|------|
|           |        |            | Min   | Typ | Max |      |

**Off Characteristics**

|                               |           |   |      |      |      |               |
|-------------------------------|-----------|---|------|------|------|---------------|
| Drain-Source Blocking Voltage | $BV_{DS}$ | $V_{GS} = 0\text{ V}, I_D = 1200\ \mu\text{A}$                              | 1200 | -    | -    | V             |
| Total Drain Leakage Current   | $I_{DSS}$ | $V_{DS} = 1200\text{ V}, V_{GS} = 0\text{ V}, T_j = 25^\circ\text{C}$       | -    | 200  | 1200 | $\mu\text{A}$ |
|                               |           | $V_{DS} = 1200\text{ V}, V_{GS} = 0\text{ V}, T_j = 150^\circ\text{C}$      | -    | 600  | -    |               |
|                               |           | $V_{DS} = 1200\text{ V}, V_{GS} \leq -10\text{ V}, T_j = 25^\circ\text{C}$  | -    | 2    | -    |               |
|                               |           | $V_{DS} = 1200\text{ V}, V_{GS} \leq -10\text{ V}, T_j = 150^\circ\text{C}$ | -    | 20   | -    |               |
| Total Gate Reverse Leakage    | $I_{GSS}$ | $V_{GS} = -10\text{ V}, V_{DS} = 0\text{ V}$                                | -    | -0.2 | -0.6 | mA            |
|                               |           | $V_{GS} = -10\text{ V}, V_{DS} = 1200\text{ V}$                             | -    | -0.2 | -    |               |

**On Characteristics**

|                            |              |   |      |      |       |          |
|----------------------------|--------------|---|------|------|-------|----------|
| Drain-Source On-resistance | $R_{DS(on)}$ | $I_D = 20\text{ A}, V_{GS} = 3\text{ V}, T_j = 25^\circ\text{C}$  | -    | 0.05 | 0.063 | $\Omega$ |
|                            |              | $I_D = 20\text{ A}, V_{GS} = 3\text{ V}, T_j = 125^\circ\text{C}$ | -    | 0.13 | -     |          |
| Gate Threshold Voltage     | $V_{GS(th)}$ | $V_{DS} = 1\text{ V}, I_D = 70\text{ mA}$                         | 0.75 | 1.00 | 1.25  | V        |
| Gate Forward Current       | $I_{GFWD}$   | $V_{GS} = 3\text{ V}$   | -    | 440  | -     | mA       |
| Gate Resistance            | $R_G$        | $f = 1\text{ MHz}, \text{ drain-source shorted}$                  | -    | 4    | -     | $\Omega$ |
|                            | $R_{G(ON)}$  | $V_{GS} > 2.7\text{ V}; \text{ See Figure 5}$                     | -    | 0.25 | -     | $\Omega$ |

**Dynamic Characteristics**


|  |             |   |   |      |   |    |
|--|-------------|---|---|------|---|----|
| Input Capacitance                            | $C_{iss}$   | $V_{DD} = 100\text{ V}$                                     | - | 1220 | - | pF |
| Output Capacitance                           | $C_{oss}$   |   | - | 180  | - |    |
| Reverse Transfer Capacitance                 | $C_{rss}$   |   | - | 169  | - |    |
| Effective Output Capacitance, energy related | $C_{o(er)}$ | $V_{DS} = 0\text{ V to } 600\text{ V}, V_{GS} = 0\text{ V}$ | - | 100  | - |    |

**Switching Characteristics**

|                        |           |   |   |     |   |               |
|------------------------|-----------|---|---|-----|---|---------------|
| Turn-on Delay          | $t_{on}$  | $V_{DS} = 600\text{ V}, I_D = 24\text{ A},$<br>Inductive Load, $T_j = 25^\circ\text{C}$<br>Gate Driver = SGDR600P1,<br>GD Voltages: +15V, -10V  | - | 15  | - | ns            |
| Rise Time              | $t_r$     |   | - | 12  | - |               |
| Turn-off Delay         | $t_{off}$ |   | - | 35  | - |               |
| Fall Time              | $t_f$     |   | - | 30  | - |               |
| Turn-on Energy         | $E_{on}$  | See Figure 15 and application note for gate drive recommendations   | - | 131 | - | $\mu\text{J}$ |
| Turn-off Energy        | $E_{off}$ |   | - | 222 | - |               |
| Total Switching Energy | $E_{ts}$  |   | - | 353 | - |               |
| Turn-on Delay          | $t_{on}$  | $V_{DS} = 600\text{ V}, I_D = 24\text{ A},$<br>Inductive Load, $T_j = 150^\circ\text{C}$<br>Gate Driver = SGDR600P1,<br>GD Voltages: +15V, -10V | - | 15  | - | ns            |
| Rise Time              | $t_r$     |   | - | 15  | - |               |
| Turn-off Delay         | $t_{off}$ |   | - | 35  | - |               |
| Fall Time              | $t_f$     |   | - | 30  | - |               |
| Turn-on Energy         | $E_{on}$  | See Figure 15 and application note for gate drive recommendations   | - | 145 | - | $\mu\text{J}$ |
| Turn-off Energy        | $E_{off}$ |   | - | 229 | - |               |
| Total Switching Energy | $E_{ts}$  |   | - | 374 | - |               |
| Total Gate Charge      | $Q_g$     | $V_{DS} = 600\text{ V}, I_D = 10\text{ A},$<br>$V_{GS} = +2.5\text{ V}$   | - | 60  | - | nC            |
| Gate-Source Charge     | $Q_{gs}$  |   | - | 2   | - |               |
| Gate-Drain Charge      | $Q_{gd}$  |   | - | 49  | - |               |


**Figure 1. Typical Output Characteristics**

$I_D = f(V_{DS}); T_j = 25\text{ }^\circ\text{C}; \text{parameter: } V_{GS}$

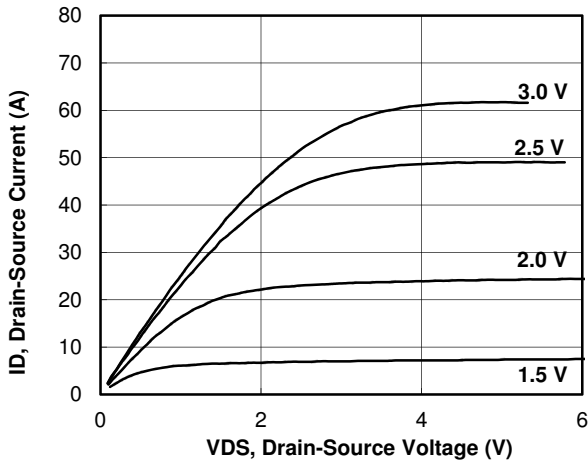


**Figure 2. Typical Output Characteristics**

$I_D = f(V_{DS}); T_j = 125\text{ }^\circ\text{C}; \text{parameter: } V_{GS}$

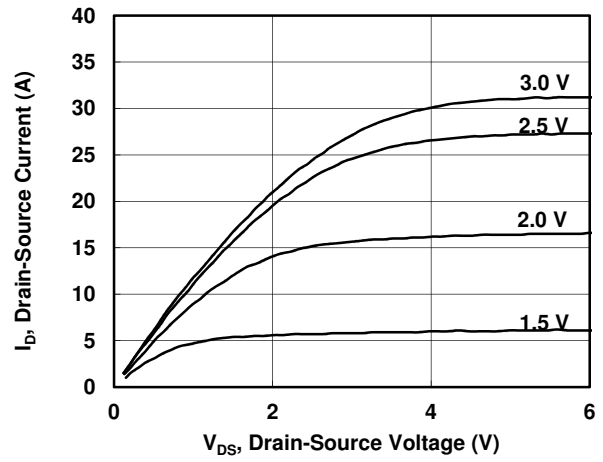


**Figure 3. Typical Output Characteristics**

$I_D = f(V_{DS}); T_j = 150\text{ }^\circ\text{C}; \text{parameter: } V_{GS}$

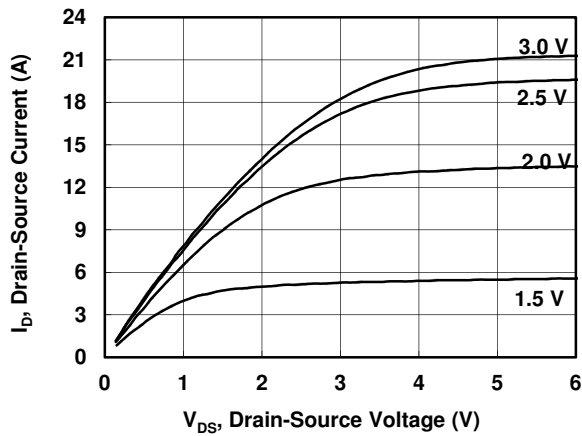


**Figure 4. Typical Transfer Characteristics**

$I_D = f(V_{GS}); V_{DS} = 5\text{ V}$

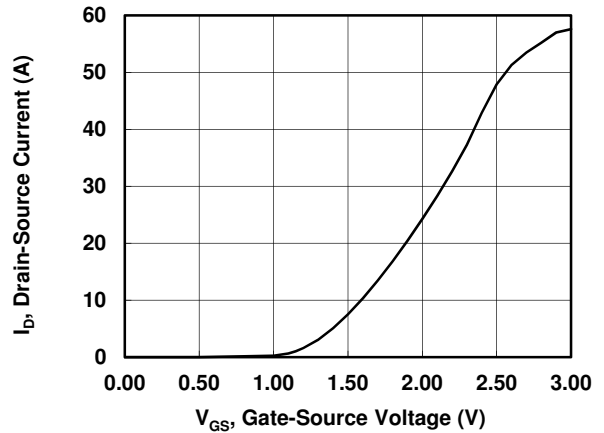


**Figure 5. Typical Gate-Source Current**

$I_{GS} = f(V_{GS}); \text{parameter: } T_j$

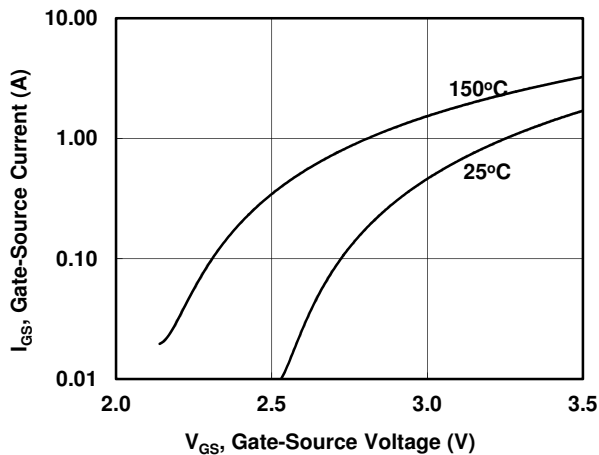


**Figure 6. Typical Drain-Source On-resistance**


$R_{DS(on)} = f(I_D); V_{GS} = 3.0; \text{parameter: } T_j$

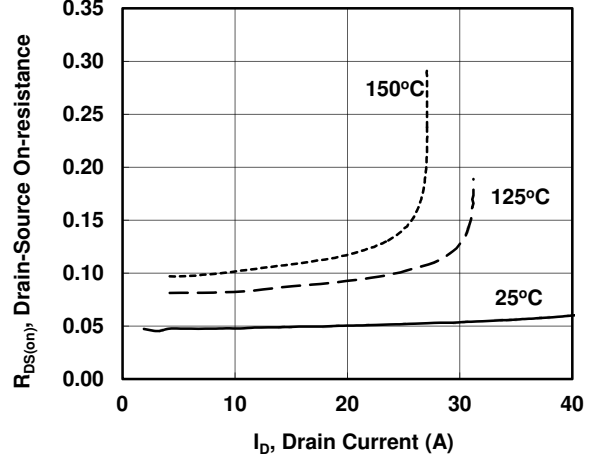


**Figure 7. Typical Drain-Source On-resistance**

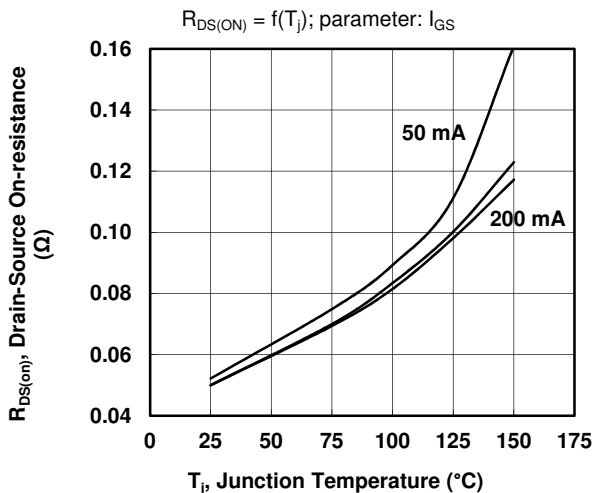


**Figure 8. Typical Drain-Source On-resistance**

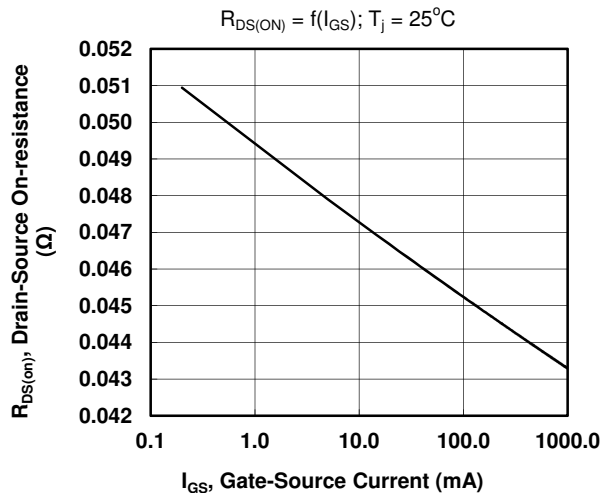


**Figure 9. Typical Capacitance**

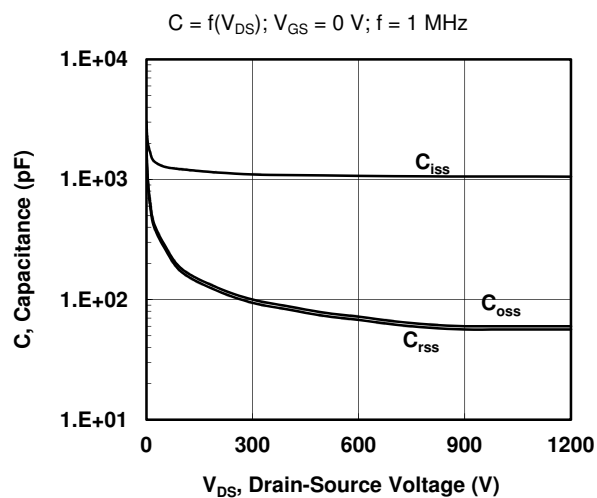


**Figure 10. Typical Gate Charge**

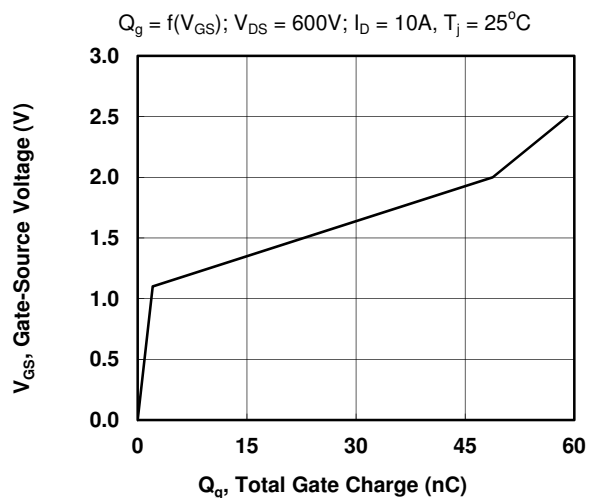

**Figure 11. Gate Threshold Voltage**

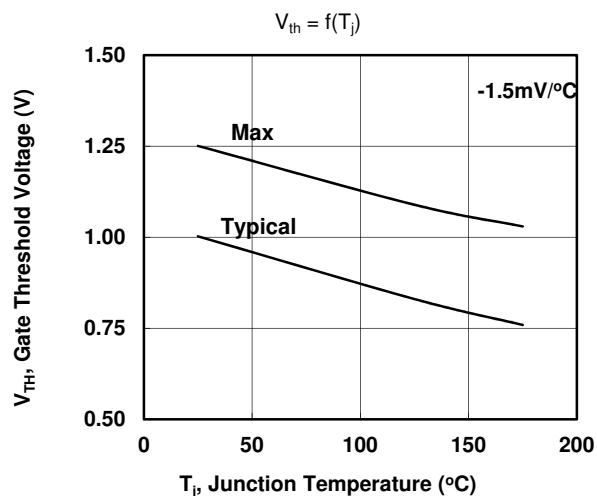


**Figure 12. Typical Drain-Source Leakage**

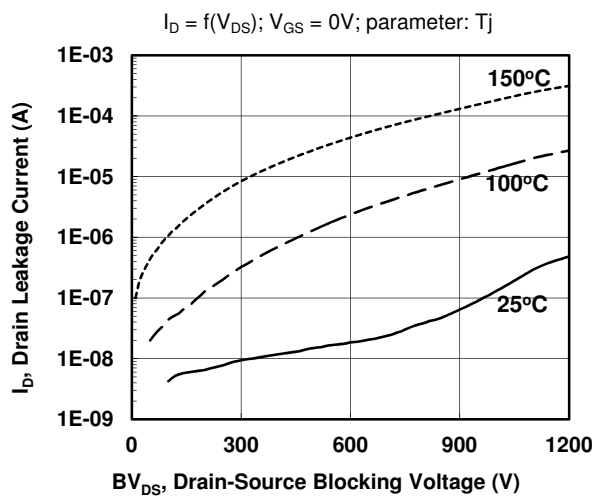


**Figure 13. Switching Energy Losses**

$E_s = f(I_D)$ ;  $V_{DS} = 600V$ ;  $GD = +15V/-10V$ ,  $R_{GEXT} = 2.5\Omega$


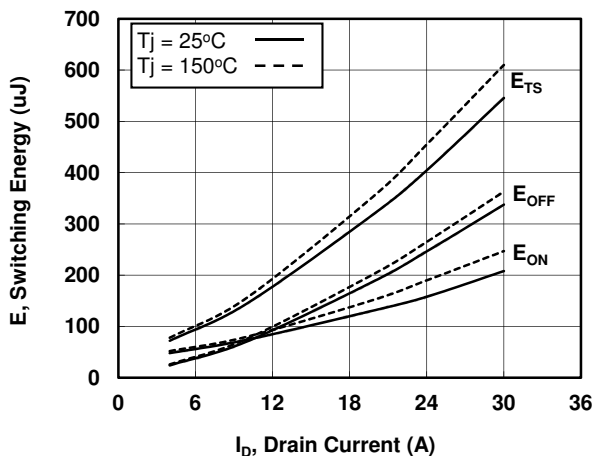


**Figure 14. Switching Energy Losses**


$E_s = f(R_{GEXT})$ ;  $V_{DS} = 600V$ ;  $I_D = 24A$ ,  $GD = +15V/-10V$

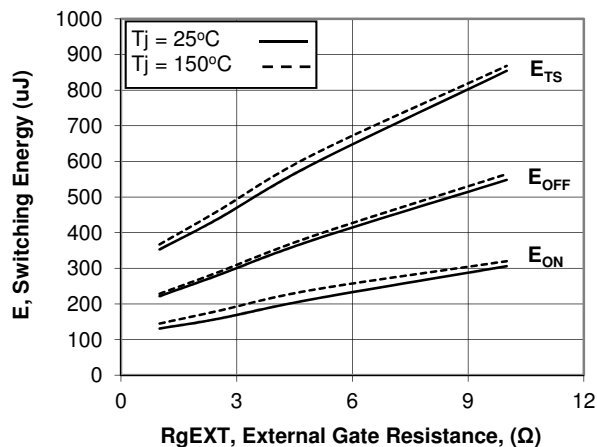

**Figure 15. Gate Driver & Gate Waveforms**

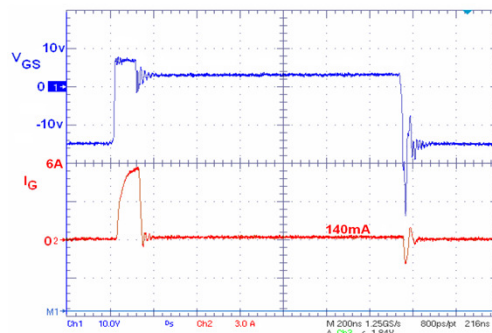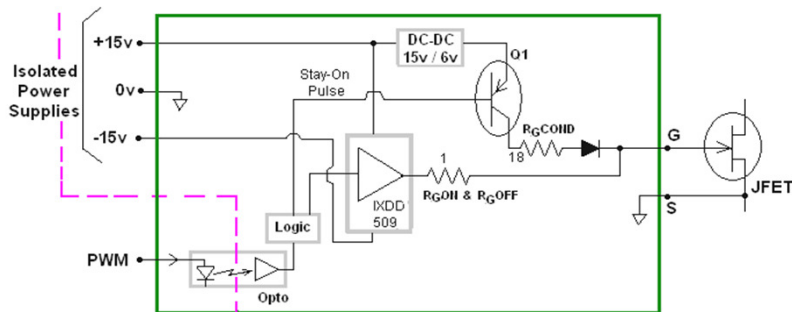




**Figure 16. Test Circuit & Test Conditions**

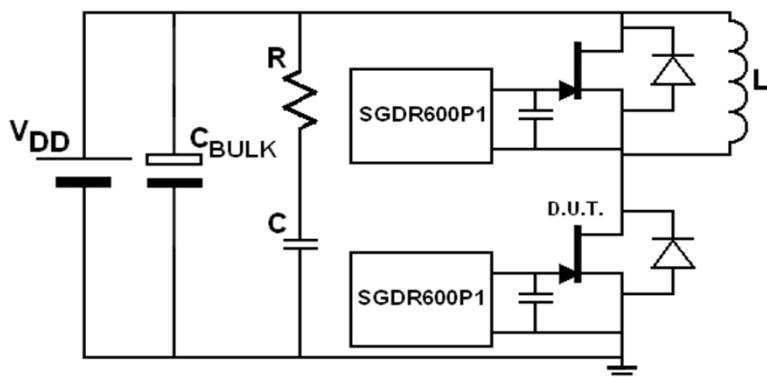

Test Conditions

- Phase-leg configuration
- $V_{DD} = 600V$ ,  $I_{LPK} = 25A$ ,  $T_A = 25^\circ C$
- RC snubber:  $R = 22$  and  $C = 4.7nF$
- 400uH load inductance
- Each device driven by separate SGDR600P1
- Gate driver approx. 5mm from gate terminal
- 3.3nF gate-source capacitive clamp

The SGDR600P1 is a gate driver reference design available for purchase from SemiSouth. See applications note AN-SS3 for full circuit description, test results, schematics, and bill of materials. Gerber files also available upon request.

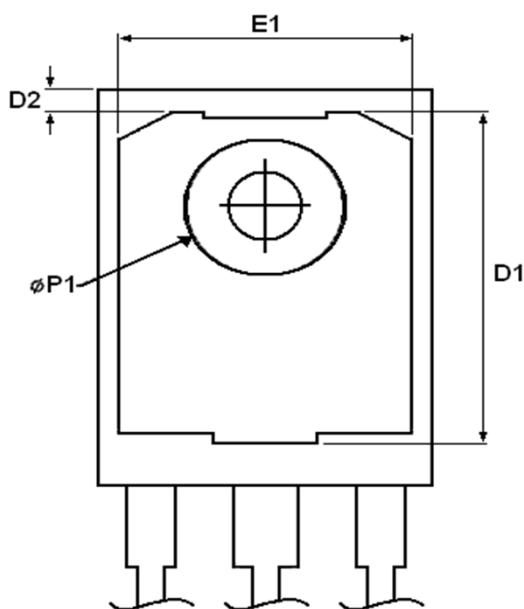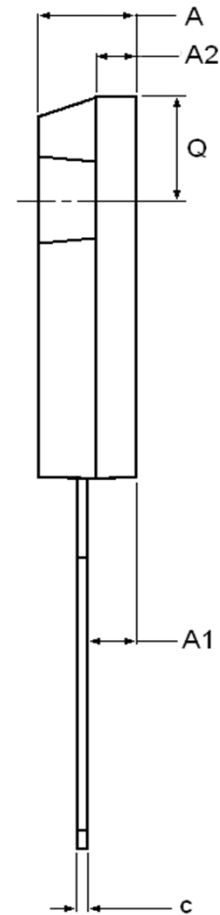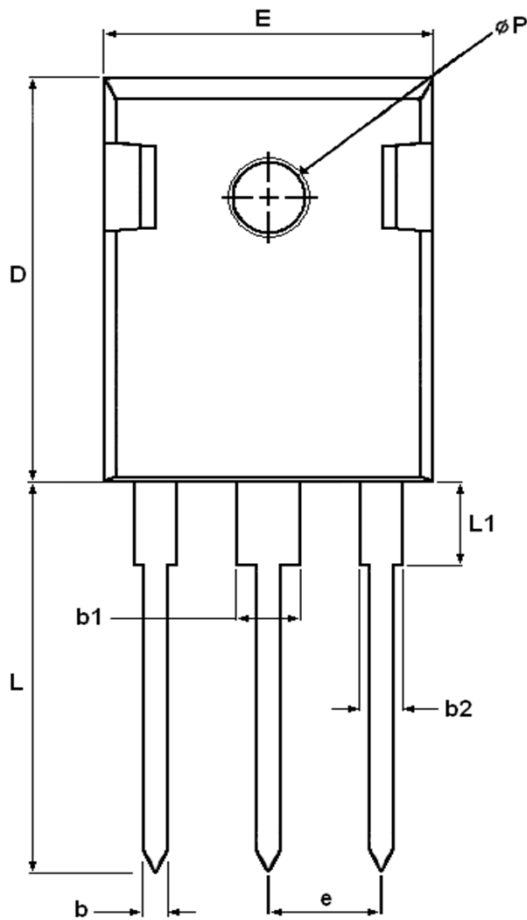

| DIM | MILLIMETERS |        | INCHES |       |
|-----|-------------|--------|--------|-------|
|     | MIN         | MAX    | MIN    | MAX   |
| A   | 4.903       | 5.157  | 0.193  | 0.203 |
| A1  | 2.273       | 2.527  | 0.090  | 0.100 |
| A2  | 1.853       | 2.108  | 0.073  | 0.083 |
| b   | 1.073       | 1.327  | 0.042  | 0.052 |
| b1  | 2.873       | 3.381  | 0.113  | 0.133 |
| b2  | 1.903       | 2.386  | 0.042  | 0.052 |
| c   | 0.600       | 0.752  | 0.024  | 0.029 |
| D   | 20.823      | 21.077 | 0.820  | 0.830 |
| D1  | 17.393      | 17.647 | 0.685  | 0.695 |
| D2  | 1.063       | 1.317  | 0.042  | 0.052 |
| e   | 5.450       |        | 0.215  |       |
| E   | 15.773      | 16.027 | 0.621  | 0.631 |
| E1  | 13.893      | 14.147 | 0.547  | 0.557 |
| L   | 20.053      | 20.307 | 0.789  | 0.799 |
| L1  | 4.168       | 4.472  | 0.165  | 0.175 |
| Q   | 6.043       | 6.297  | 0.238  | 0.248 |
| ØP  | 3.560       | 3.660  | 0.140  | 0.144 |
| ØP1 | 7.063       | 7.317  | 0.278  | 0.288 |

Published by  
SemiSouth Laboratories, Inc.  
201 Research Boulevard  
Starkville, MS 39759 USA  
© SemiSouth Laboratories, Inc. 2011

Information in this document supersedes and replaces all information previously supplied.

Information in this document is provided solely in connection with SemiSouth products. SemiSouth Laboratories, Inc. reserves the right to make changes, corrections, modifications or improvements, to this document without notice.

No license, express or implied to any intellectual property rights is granted under this document.

Unless expressly approved in writing by an authorized representative of SemiSouth, SemiSouth products are not designed, authorized or warranted for use in military, aircraft, space, life saving, or life sustaining applications, nor in products or systems where failure or malfunction may result in personal injury, death, or property or environmental damage.