

PQFP Sockets (MICRO-PITCH) — Standard (Continued)

Materials and Finish

Housing — High temperature thermoplastic, 94V-0 rated, black

Cover — Polyphenylene sulfide (PPS), 94V-0 rated, black

Contacts — Phosphor bronze with .000200 (.00508) tin over .000050 (.00127) nickel

Insertion Hand Tools




100 Pos. 822253-1

132 Pos. 822253-2



Extraction Tool

Part No. 822254-1

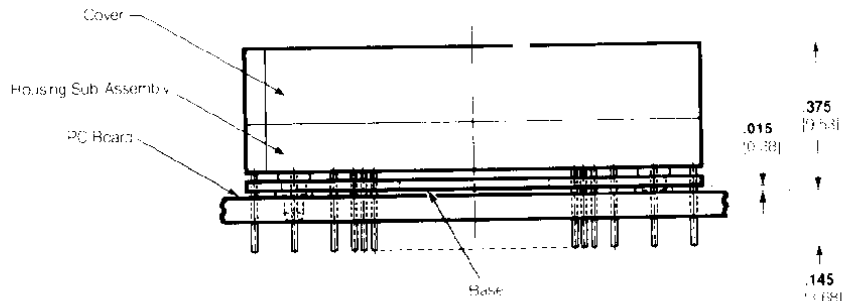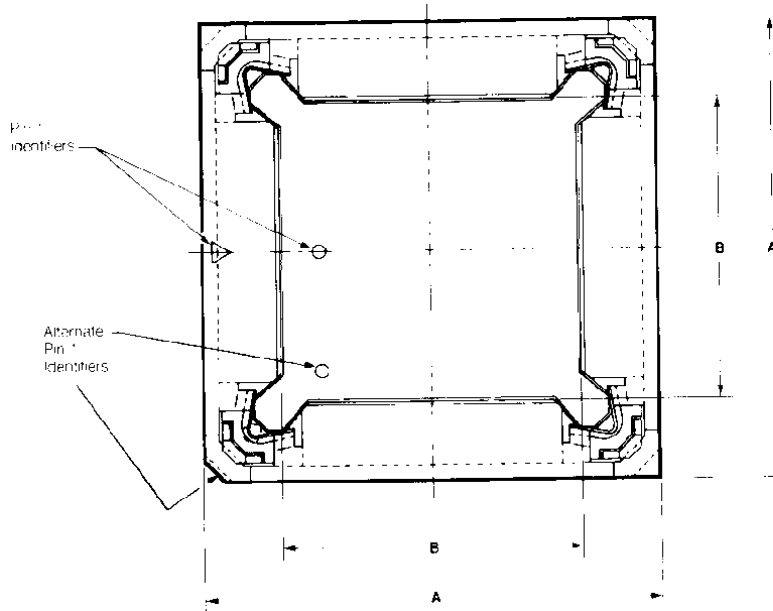

No. of Pos.	Dimensions		Conventional AMP Sockets		Replacement for 3M TEXTOL Sockets	
	A	B	Housing Sub-Assembly	Cover	Housing Sub-Assembly	Cover
100	1.140 28.96	.750 19.05	821949-4 ¹	821939-1	822064-4	821939-1
132	1.340 34.04	.950 24.13	821949-5 ¹	821942-1	822064-5	821942-1

¹Conventional footprint: see page 90.

²Reverse footprint: see page 91.

Packaging Quantities:

100 Position — 19 Pcs./Tube, 54 Tubes/Box. Total = 1026 Pcs./Box

132 Position — 16 Pcs./Tube, 45 Tubes/Box. Total = 720 Pcs./Box