


Capacitor, tantalum, 22 uF, +/-10% Tol, 35V@85C

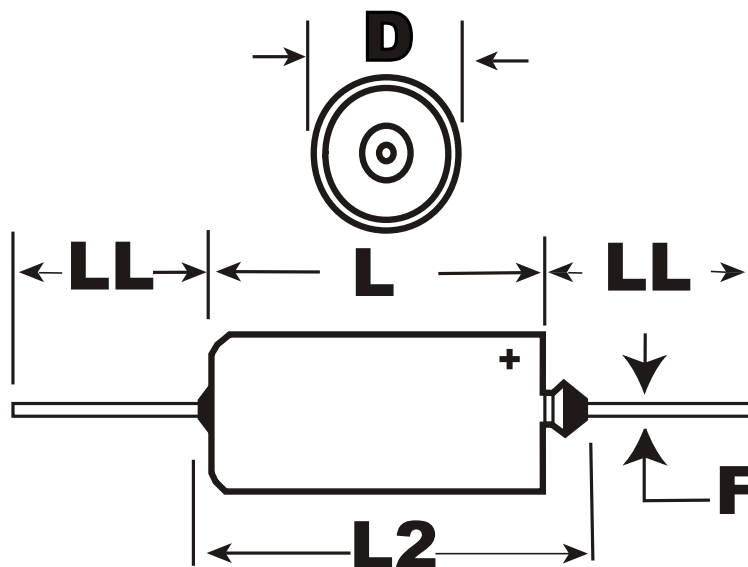

### Dimensions (mm)

ID	Dimension	Tolerance
D	7.34	+/-0.25
L1	17.42	+/-0.79
L2	20.88	+0
F	0.64	+/-0.05
LL	38.1	+/-6.35

### Specifications

<b>Manufacturer:</b>	KEMET
<b>Value:</b>	22 uF
<b>Voltage DC @ 85C:</b>	35V
<b>Voltage DC @ 125C:</b>	23V
<b>Tolerance:</b>	+/-10%
<b>Application:</b>	Military ER/General Purpose
<b>Body Type:</b>	Axial Hermetic ('cs13-style')
<b>Temperature Range:</b>	-55/+125C
<b>ESR:</b>	1.3 Ohm
<b>ESR Frequency @ 25C:</b>	100kHz
<b>Leakage Current:</b>	4 uA
<b>Dissipation Factor:</b>	4%
<b>Package Kind:</b>	Bulk
<b>Package Type:</b>	Tray

#### Notes:

-Dimensions include insulating sleeve (standard)

-C