

EIA-485/EIA-422A Differential Bus Transceiver

General Description

The DS16F95/DS36F95 Differential Bus Transceiver is a monolithic integrated circuit designed for bidirectional data communication on balanced multipoint bus transmission lines. The transceiver meets both EIA-485 and EIA-422A standards.

The DS16F95/DS36F95 offers improved performance due to the use of L-FAST bipolar technology. The L-FAST technology allows for higher speeds and lower currents by minimizing gate delay times. Thus, the DS16F95 and DS36F95 consume less power, and feature an extended temperature range as well as improved specifications.

The DS16F95/DS36F95 combines a TRI-STATE® differential line driver and a differential input line receiver, both of which operate from a single 5.0V power supply. The driver and receiver have an active Enable that can be externally connected to function as a direction control. The driver differential outputs and the receiver differential inputs are internally connected to form differential input/output (I/O) bus ports that are designed to offer minimum loading to the bus whenever the driver is disabled or when $V_{CC} = 0V$. These ports feature wide positive and negative common mode voltage ranges, making the device suitable for multipoint applications in noisy environments.


The driver is designed to accommodate loads of up to 60 mA of sink or source current and features positive and negative current limiting in addition to thermal shutdown for protection from line fault conditions.

The DS16F95/DS36F95 can be used in transmission line applications employing the DS96F172 and the DS96F174 quad differential line drivers and the DS96F173 and DS96F175 quad differential line receivers.

Features

- Meets EIA-485 and EIA-422A
- Meets SCSI-1 (5 MHz) specifications
- Designed for multipoint transmission
- Wide positive and negative input/output bus voltage ranges
- Thermal shutdown protection
- Driver positive and negative current-limiting
- High impedance receiver input
- Receiver input hysteresis of 50 mV typical
- Operates from single 5.0V supply
- Reduced power consumption
- Pin compatible with DS3695 and SN75176A
- Military temperature range available
- Qualified for MIL-STD 883C
- Standard Military Drawings (SMD) available
- Available in DIP (J), SOIC (M), LCC (E), and Flatpak (W) packages

Logic Diagram

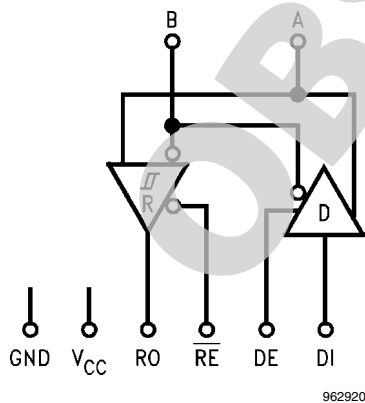

Function Tables

| Driver | | | |
|--------------|--------|---------|---|
| Driver Input | Enable | Outputs | |
| DI | DE | A | B |
| H | H | H | L |
| L | H | L | H |
| X | L | Z | Z |

| Receiver | | |
|---------------------|-----------------|--------|
| Differential Inputs | Enable | Output |
| A-B | \overline{RE} | RO |
| $V_{ID} \geq 0.2V$ | L | H |
| $V_{ID} \leq -0.2V$ | L | L |
| X | H | Z |

H = High Level
L = Low Level
X = Immaterial
Z = High Impedance (Off)

Absolute Maximum Ratings *(Note 2)*

Specifications for the 883 version of this product are listed separately on the following pages.

| | |
|---|-----------------|
| Storage Temperature Range | -65°C to +175°C |
| Lead Temperature (Soldering, 60 sec.) | 300°C |
| Maximum Package Power Dissipation <i>(Note 1)</i> at 25°C | |
| 'J' Package | 1300 mW |
| 'M' Package | 735 mW |
| Supply Voltage | 7.0V |
| Input Voltage (Bus Terminal) | +15V/-10V |
| Enable Input Voltage | 5.5V |

Recommended Operating Conditions

| | Min | Typ | Max | Units |
|--|------|-----|------|-------|
| Supply Voltage (V_{CC}) DS36F95 | 4.75 | 5.0 | 5.25 | V |

Driver Electrical Characteristics *(Note 3, Note 4)*

Over recommended supply voltage and operating temperature ranges, unless otherwise specified

| Symbol | Parameter | Conditions | Min | Typ | Max | Units | |
|------------------|---|--|---|------|-----------|---------|----|
| V_{IH} | Input Voltage HIGH | | 2.0 | | | V | |
| V_{IL} | Input Voltage LOW | | | | 0.8 | V | |
| V_{OH} | Output Voltage HIGH | $I_{OH} = -55$ mA 0°C to +70°C | 3.0 | | | V | |
| V_{OL} | Output Voltage LOW | $I_{OL} = 55$ mA 0°C to +70°C | | | 2.0 | V | |
| V_{IC} | Input Clamp Voltage | $I_I = -18$ mA | | | -1.3 | V | |
| $ V_{OD1} $ | Differential Output Voltage | $I_O = 0$ mA | | | 6.0 | V | |
| $ V_{OD2} $ | Differential Output Voltage | $R_L = 100\Omega$, <i>Figure 1</i> | 2.0 | 2.25 | | V | |
| | | $R_L = 54\Omega$, <i>Figure 1</i> | 1.5 | 2.0 | | | |
| $\Delta V_{OD} $ | Change in Magnitude of Differential Output Voltage <i>(Note 5)</i> | $R_L = 54\Omega$ or 100Ω , <i>Figure 1</i> | -40°C to +125°C | | ± 0.2 | V | |
| | | | -55°C to +125°C | | ± 0.4 | | |
| V_{OC} | Common Mode Output Voltage <i>(Note 6)</i> | | | | 3.0 | V | |
| $\Delta V_{OC} $ | Change in Magnitude of Common Mode Output Voltage <i>(Note 5)</i> | | | | ± 0.2 | V | |
| I_O | Output Current <i>(Note 9)</i> (Includes Receiver I_I) | Output Disabled | $V_O = +12V$ | | 1.0 | mA | |
| | | | $V_O = -7.0V$ | | -0.8 | | |
| I_{IH} | Input Current HIGH | $V_I = 2.4V$ | | | 20 | μA | |
| I_{IL} | Input Current LOW | $V_I = 0.4V$ | | | -50 | μA | |
| I_{OS} | Short Circuit Output Current <i>(Note 10)</i> | $V_O = -7.0V$ | | | -250 | mA | |
| | | $V_O = 0V$ | | | -150 | | |
| | | $V_O = V_{CC}$ | | | 150 | | |
| | | $V_O = +12V$ | | | 250 | | |
| I_{CC} | Supply Current (Total Package) | No Load, All Inputs Open | DE = 2V, $\overline{RE} = 0.8V$ Outputs Enabled | | | 28 | mA |
| | | | DE = 0.8V, $\overline{RE} = 2V$ Outputs Disabled | | | 25 | |

| | Min | Typ | Max | Units |
|---|------|-----|----------|---------|
| DS16F95 | 4.50 | 5.0 | 5.50 | V |
| Voltage at Any Bus Terminal (Separately or Common Mode) (V_I or V_{CM}) | -7.0 | | +12 | V |
| Differential Input Voltage (V_{ID}) | | | ± 12 | V |
| Output Current HIGH (I_{OH}) Driver | | | -60 | mA |
| Receiver | | | -400 | μA |
| Output Current LOW (I_{OL}) Driver | | | 60 | mA |
| Receiver | | | 16 | mA |
| Operating Temperature (T_A) DS36F95 | 0 | +25 | +70 | °C |
| DS16F95 | -55 | +25 | +125 | °C |

Note 1: Derate 'J' package 8.7 mW/°C above 25°C.
Derate 'M' package 5.88 mW/°C above 25°C.

Driver Switching Characteristics

 $V_{CC} = 5.0V, T_A = 25^\circ C$

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|------------|---|--|-----|-----|-----|-------|
| t_{DD} | Differential Output Delay Time | $R_L = 60\Omega$, Figure 3 | 8.0 | 15 | 20 | ns |
| t_{TD} | Differential Output Transition Time | | 8.0 | 15 | 22 | ns |
| t_{PLH} | Propagation Delay Time, Low-to-High Level Output | $R_L = 27\Omega$, Figure 4 | 6.0 | 12 | 16 | ns |
| t_{PHL} | Propagation Delay Time, High-to-Low Level Output | | 6.0 | 12 | 16 | ns |
| t_{ZH} | Output Enable Time to High Level | $R_L = 110\Omega$, Figure 5 | | 25 | 32 | ns |
| t_{ZL} | Output Enable Time to Low Level | $R_L = 110\Omega$, Figure 6 | | 25 | 32 | ns |
| t_{HZ} | Output Disable Time from High Level | $R_L = 110\Omega$, Figure 5 | | 20 | 25 | ns |
| t_{LZ} | Output Disable Time from Low Level | $R_L = 110\Omega$, Figure 6 | | 20 | 25 | ns |
| t_{LZL} | Output Disable Time from Low Level with Load Resistor to GND | Load per Figure 5 Timing per Figure 6 | | 300 | | ns |
| t_{SKEW} | Skew (Pulse Width Distortion) | $R_L = 60\Omega$, Figure 3 | | 1.0 | 4.0 | ns |

Receiver Electrical Characteristics

Over recommended supply voltage and operating temperature ranges, unless otherwise specified

| Symbol | Parameter | Conditions | Min | Typ | Max | Units | |
|-----------------|--|--|---------------------------------|-----|----------|------------|----|
| V_{TH} | Differential Input High Threshold Voltage | $V_O = 2.7V, I_O = -0.4\text{ mA}$ | | | 0.2 | V | |
| V_{TL} | Differential Input Low Threshold Voltage (Note 7) | $V_O = 0.5V, I_O = 8.0\text{ mA}$ | -0.2 | | | V | |
| $V_{T+}-V_{T-}$ | Hysteresis (Note 8) | $V_{CM} = 0V$ | 35 | 50 | | mV | |
| V_{IH} | Enable Input Voltage HIGH | | 2.0 | | | V | |
| V_{IL} | Enable Input Voltage LOW | | | | 0.8 | V | |
| V_{IC} | Enable Input Clamp Voltage | $I_I = -18\text{ mA}$ | | | -1.3 | V | |
| V_{OH} | Output Voltage HIGH | $V_{ID} = 200\text{ mV},$ $I_{OH} = -400\text{ }\mu A,$ Figure 2 | $0^\circ C$ to $+70^\circ C$ | 2.8 | | | V |
| | | | $-55^\circ C$ to $+125^\circ C$ | 2.5 | | | |
| V_{OL} | Output Voltage LOW | $V_{ID} = -200\text{ mV},$ Figure 2 | $I_{OL} = 8.0\text{ mA}$ | | | 0.45 | V |
| | | | $I_{OL} = 16\text{ mA}$ | | | 0.50 | |
| I_{OZ} | High Impedance State Output | $V_O = 0.4V$ to $2.4V$ | | | ± 20 | μA | |
| I_I | Line Input Current (Note 9) | Other Input = $0V$ | $V_I = +12V$ | | | 1.0 | mA |
| | | | $V_I = -7.0V$ | | | 0.8 | |
| I_{IH} | Enable Input Current HIGH | $V_{IH} = 2.7V$ | | | 20 | μA | |
| I_{IL} | Enable Input Current LOW | $V_{IL} = 0.4V$ | | | -50 | μA | |
| R_I | Input Resistance | | 14 | 18 | 22 | k Ω | |
| I_{OS} | Short Circuit Output Current | (Note 9) | -15 | | -85 | mA | |
| I_{CC} | Supply Current (Total Package) | No Load, All Inputs Open | | | 28 | mA | |
| I_{CCX} | | | | | 25 | | |

Receiver Switching Characteristics

 $V_{CC} = 5.0V, T_A = 25^\circ C$

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-----------------------|---|--|-----|-----|-----|-------|
| t_{PLH} | Propagation Delay Time, Low-to-High Level Output | $V_{ID} = 0V$ to $+3.0V$ $C_L = 15$ pF, <i>Figure 7</i> | 14 | 19 | 24 | ns |
| t_{PHL} | Propagation Delay Time, High-to-Low Level Output | | 14 | 19 | 24 | ns |
| t_{ZH} | Output Enable Time to High Level | $C_L = 15$ pF, <i>Figure 8</i> | | 10 | 16 | ns |
| t_{ZL} | Output Enable Time to Low Level | | | 12 | 18 | ns |
| t_{HZ} | Output Disable Time from High Level | $C_L = 5.0$ pF, <i>Figure 8</i> | | 12 | 20 | ns |
| t_{LZ} | Output Disable Time from Low Level | | | 12 | 18 | ns |
| $ t_{PLH} - t_{PHL} $ | Pulse Width Distortion (SKEW) | <i>Figure 7</i> | | 1.0 | 4.0 | ns |

Note 2: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The tables of "Electrical Characteristics" provide conditions for actual device operation.

Note 3: Unless otherwise specified min/max limits apply across the $-55^\circ C$ to $+125^\circ C$ temperature range for the DS16F95 and across the $0^\circ C$ to $+70^\circ C$ range for the DS36F95. All typicals are given for $V_{CC} = 5V$ and $T_A = 25^\circ C$.

Note 4: All currents into the device pins are positive; all currents out of the device pins are negative. All voltages are referenced to ground unless otherwise specified.

Note 5: ΔV_{OD} and ΔV_{OC} are the changes in magnitude of V_{OD} and V_{OC} , respectively, that occur when the input is changed from a high level to a low level.

Note 6: In TIA/EIA-422A and TIA/EIA-485 Standards, V_{OC} , which is the average of the two output voltages with respect to ground, is called output offset voltage, V_{OS} .

Note 7: The algebraic convention, where the less positive (more negative) limit is designated minimum, is used in this data sheet for common mode input voltage and threshold voltage levels only.

Note 8: Hysteresis is the difference between the positive-going input threshold voltage, V_{T+} , and the negative-going input threshold voltage, V_{T-} .

Note 9: Refer to TIA/EIA-485 Standard for exact conditions.

Note 10: Only one output at a time should be shorted.

Order Number

DS16F95J, NS Package Number J08A

DS36F95J, NS Package Number J08A

DS36F95M, NS Package Number M08A

Parameter Measurement Information

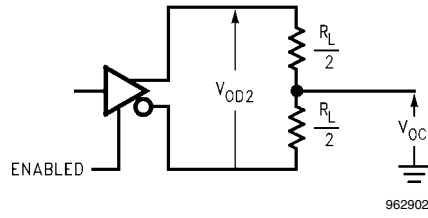


FIGURE 1. Driver V_{OD} and V_{OC} (Note 14)




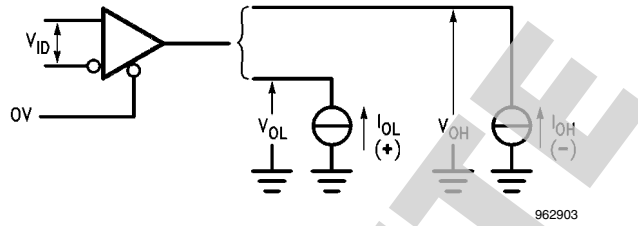


FIGURE 2. Receiver V_{OH} and V_{OL}

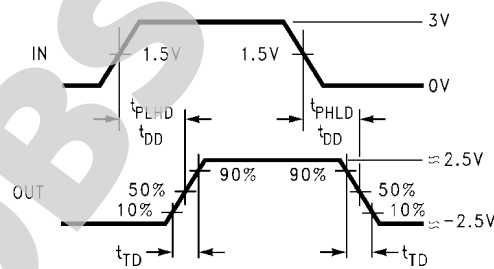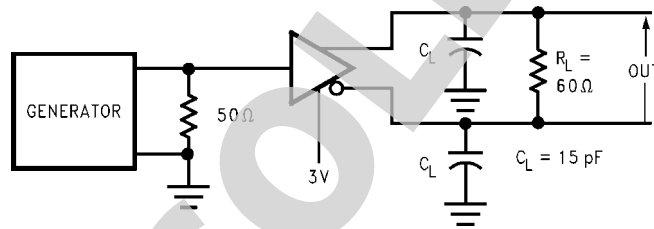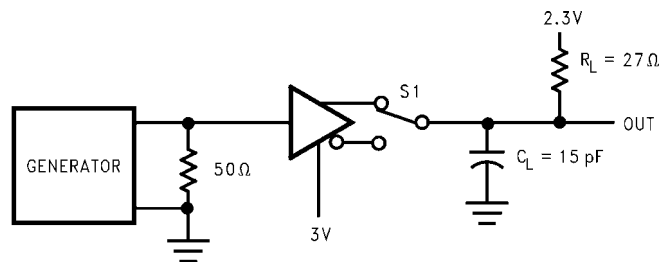

$$t_{SKEW} = |t_{PLHD} - t_{PHLD}|$$

FIGURE 3. Driver Differential Output Delay and Transition Times (Note 11, Note 13)



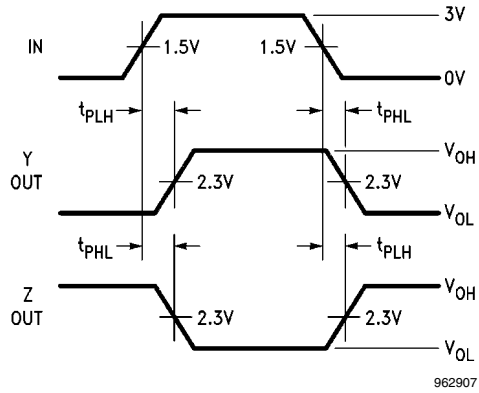


FIGURE 4. Driver Propagation Times (Note 11, Note 12)

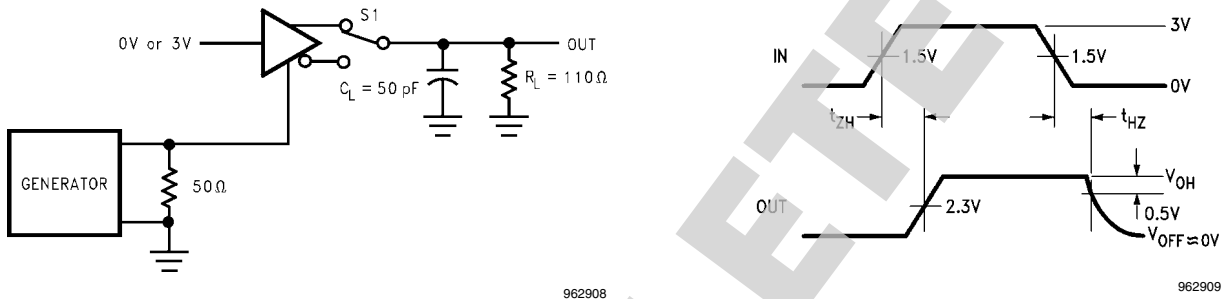


FIGURE 5. Driver Enable and Disable Times (t_{ZH} , t_{HZ}) (Note 11, Note 12, Note 13)

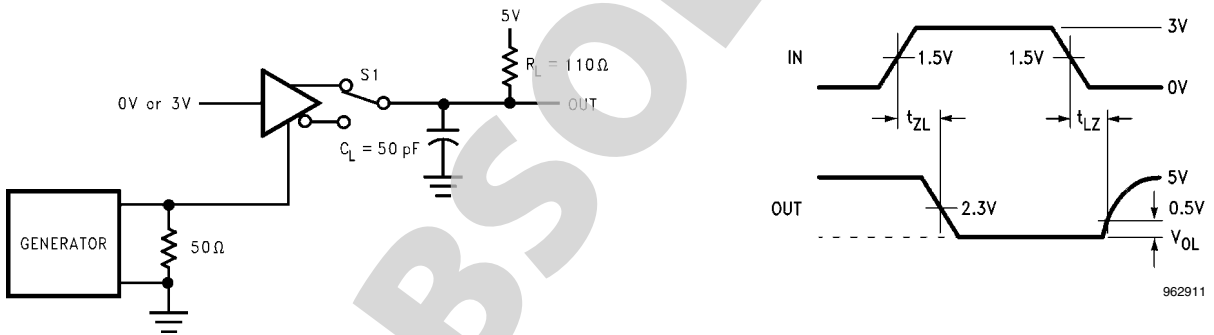


FIGURE 6. Driver Enable and Disable Times (t_{ZL} , t_{LZ} , t_{LZL}) (Note 11, Note 12, Note 13)



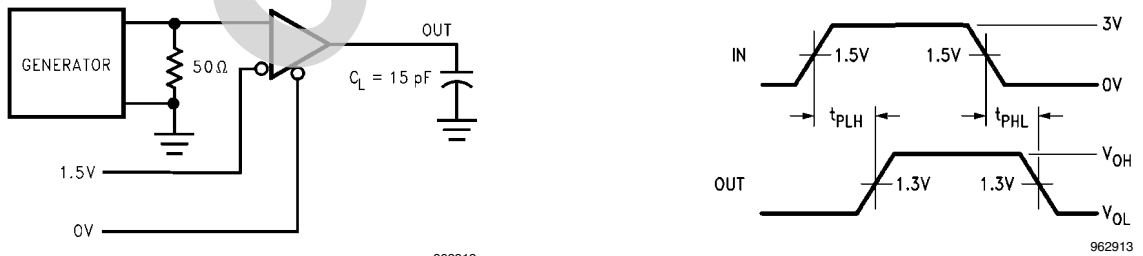


FIGURE 7. Receiver Propagation Delay Times (Note 11, Note 12)

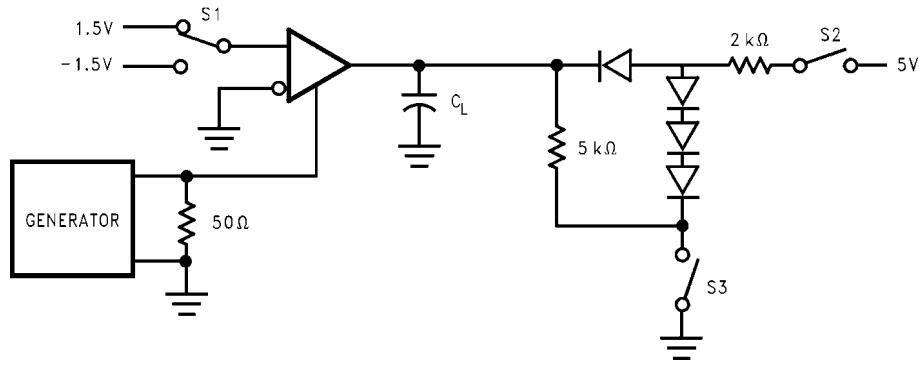

962914

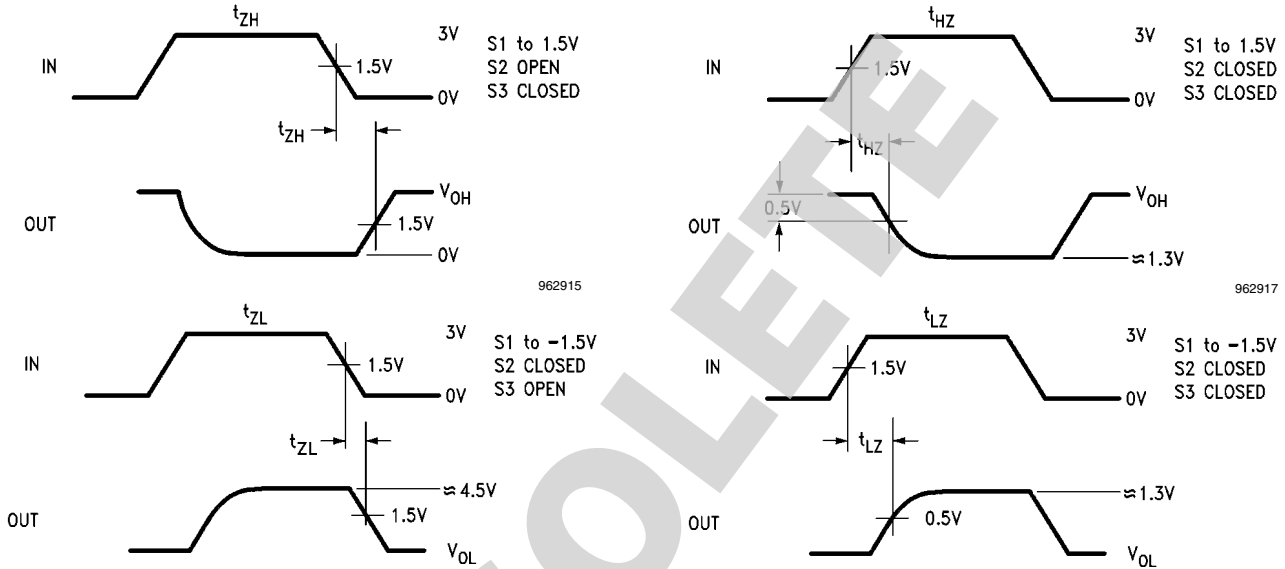

962915

962917

962916

962918

FIGURE 8. Receiver Enable and Disable Times (Note 11, Note 12, Note 14)

Note 11: The input pulse is supplied by a generator having the following characteristics: PRR = 1.0 MHz, 50% duty cycle, $t_r \leq 6.0$ ns, $t_f \leq 6.0$ ns, $Z_o = 50\Omega$.


Note 12: C_L includes probe and stray capacitance.

Note 13: DS16F95/DS36F95 Driver enable is Active-High.

Note 14: All diodes are 1N916 or equivalent.

Note 15: Testing at 20 pF assures conformance to 5 pF specification.

Typical Application

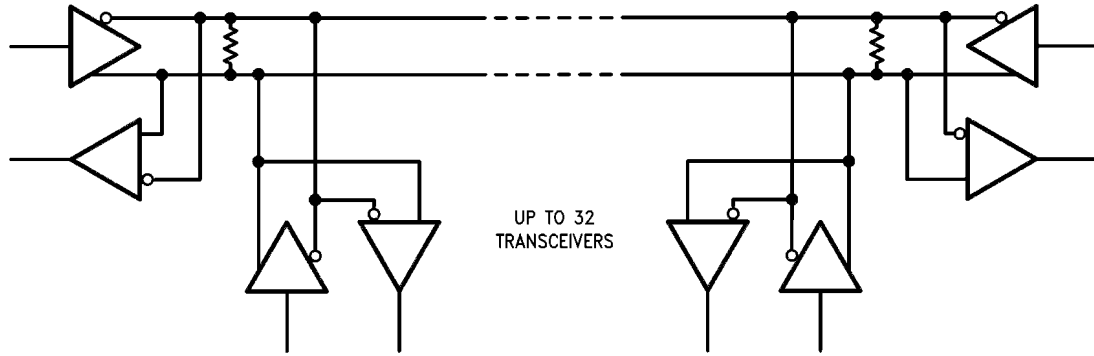


The line should be terminated at both ends in its characteristic impedance, typically 120Ω.
Stub lengths off the main line should be kept as short as possible.

962919

Connection Diagram


8-Lead Dual-In-Line Package or Small Outline Molded Package

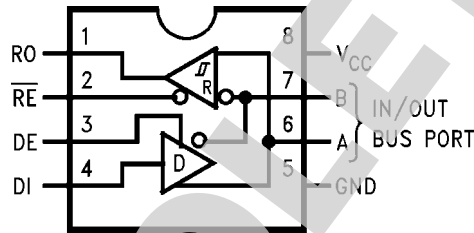

Order Number DS16F95, DS16F95J/883, DS36F95J, DS36F95M
See NS Package Number J08A, or M08A

962901

Physical Dimensions inches (millimeters) unless otherwise noted

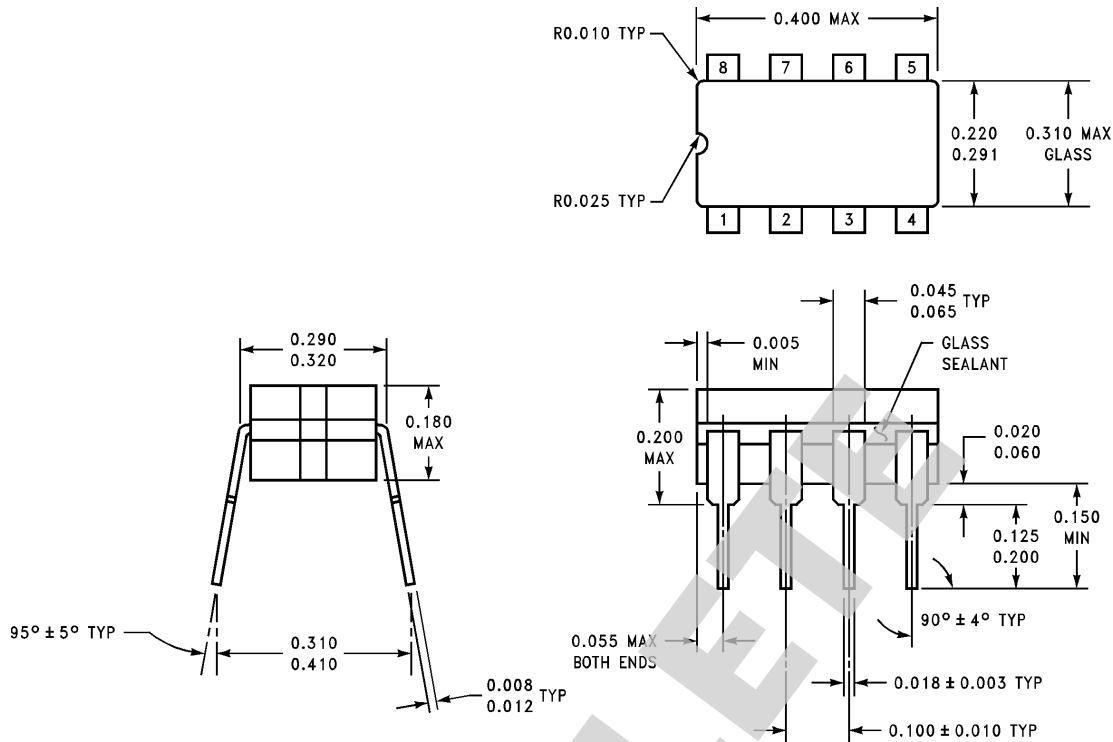

8 Narrow Lead Ceramic Dual-In-Line Package (J)
Order Number DS16F95J, DS16F95J/883 or DS36F95J
NS Package Number J08A

J08A (REV K)

OBSOLETE

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:
www.national.com

| Products | | Design Support | |
|--------------------------------|--|------------------------------|--|
| Amplifiers | www.national.com/amplifiers | WEBENCH® Tools | www.national.com/webench |
| Audio | www.national.com/audio | App Notes | www.national.com/appnotes |
| Clock and Timing | www.national.com/timing | Reference Designs | www.national.com/refdesigns |
| Data Converters | www.national.com/adc | Samples | www.national.com/samples |
| Interface | www.national.com/interface | Eval Boards | www.national.com/evalboards |
| LVDS | www.national.com/lvds | Packaging | www.national.com/packaging |
| Power Management | www.national.com/power | Green Compliance | www.national.com/quality/green |
| Switching Regulators | www.national.com/switchers | Distributors | www.national.com/contacts |
| LDOs | www.national.com/ldo | Quality and Reliability | www.national.com/quality |
| LED Lighting | www.national.com/led | Feedback/Support | www.national.com/feedback |
| Voltage References | www.national.com/vref | Design Made Easy | www.national.com/easy |
| PowerWise® Solutions | www.national.com/powerwise | Applications & Markets | www.national.com/solutions |
| Serial Digital Interface (SDI) | www.national.com/sdi | Mil/Aero | www.national.com/milaero |
| Temperature Sensors | www.national.com/tempensors | SolarMagic™ | www.national.com/solarmagic |
| PLL/VCO | www.national.com/wireless | PowerWise® Design University | www.national.com/training |

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY


NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2009 National Semiconductor Corporation

For the most current product information visit us at www.national.com

 **National Semiconductor Americas Technical Support Center**
 Email: support@nsc.com
 Tel: 1-800-272-9959

National Semiconductor Europe Technical Support Center
 Email: europe.support@nsc.com

National Semiconductor Asia Pacific Technical Support Center
 Email: ap.support@nsc.com

National Semiconductor Japan Technical Support Center
 Email: jpn.feedback@nsc.com