

HPK

*Thermal transfer
printable panel labels*

Tyco HPK is a semi-rigid, heavy gauge polypropylene film with a permanent acrylic adhesive, designed to permanently identify control panel components and racks, as well as general labeling applications that require a high performance heavy gauge material. They offer excellent abrasion resistance, and adhere to most smooth surfaces including bare and painted metal.

For guaranteed print performance and durability, use with Tyco's RHD series ribbon.

Features and benefits

- Self-adhesive backing for quick and easy fixing.
- Thermal transfer printable.
- Recommended for indoor use.
- Resistant to common fluids, lubricants and solvents.



Temperature rating


Operating temperature range	-29°C to +80°C	-24°F to +176°F
-----------------------------	----------------	-----------------

Printer information


Tyco printer	T308S (thermal transfer)
Tyco ribbon	1330-0607-10 (thermal transfer)

Part numbering system

HPK-02-WE-1 050

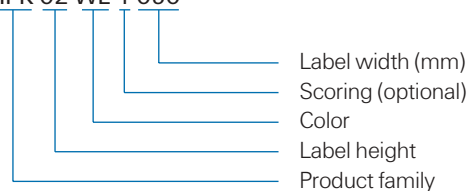

Ordering information



Available sizes and formats

Ordering description	Labels across	(A) Label width		(B) Label height		(C) Vertical repeat		(D) Web width	
		mm	inches	mm	inches	mm	inches	mm	inches
HPK02WE1050	1	50.80	2.000	5.10	0.200	8.30	0.325	57.20	2.250
HPK04WE1050	1	50.80	2.000	10.20	0.400	13.30	0.525	57.20	2.250
HPK06WE1050	1	50.80	2.000	15.20	0.600	18.40	0.725	57.20	2.250
HPK08WE1050	1	50.80	2.000	20.30	0.800	23.50	0.925	57.20	2.250
HPK10WE1050	1	50.80	2.000	25.40	1.000	28.60	1.125	57.20	2.250

Options

Prescoring	Perforated score to produce multiple labels from each HPK label.	
	Number of prescores	0 prescores 1 prescore
	Code	1 2
Package size	Standard	1000 piece pack
Color	Standard	White

Ordering information: Specify product name, product size and prescores.

Ordering example: HPK02WE1050