





0.52 INCH (13.2MM) THREE DIGIT STICK DISPLAY

BRIGHT RED MST5150C, MST5160C
GREEN MST5450C, MST5460C
HIGH EFF. RED MST5950C, MST5960C

PACKAGE DIMENSIONS

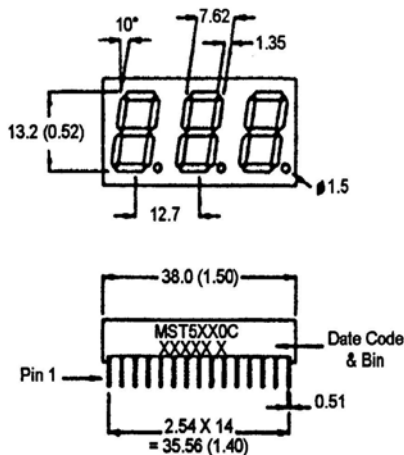

FEATURES

- Easy to read digits.
- 3 digit common anode or cathode.
- Low power consumption.
- Bold segments that are highly visible.
- High brightness with high contrast
- White segments on a grey face.
- Directly compatible with integrated circuits.
- Rugged plastic/epoxy construction.

APPLICATIONS

- Digital readout displays.
- Instrument panels.

NOTES: Dimensions are in mm (inch).
 All pins are 0.5 (0.02) diameter
 Tolerances are ± 0.25 (0.1) unless otherwise noted.

MODEL NUMBERS

<u>Part number</u>	<u>Color</u>	<u>Description</u>
MST5150C	Bright Red	3 Digit, Common Anode, RHDP.
MST5160C	Bright Red	3 Digit, Common Cathode, RHDP.
MST5450C	Green	3 Digit, Common Anode, RHDP.
MST5460C	Green	3 Digit, Common Cathode, RHDP.
MST5950C	High Eff. Red	3 Digit, Common Anode, RHDP.
MST5960C	High Eff. Red	3 Digit, Common Cathode, RHDP.

(For other color options, contact your local area Sales Office).



**0.52 INCH (13.2MM)
THREE DIGIT STICK DISPLAY**

ABSOLUTE MAXIMUM RATING ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Part number	B.Red	Green	High Eff. Red	Unit
	MST	MST	MST	
	5150C	5450C	5950C	
	5160C	5460C	5960C	
Continuous forward current (I_f)				
Per Segment.....	15	25	25	mA
Peak forward current per die (I_p).....	60	90	90	mA
(at $f = 10$ KHz, Duty factor = 1/10)				
Power dissipation (P_D).....	40*	70*	70*	mW
*Derate Linearly from 25°C	0.17	0.33	0.33	mW/ $^{\circ}\text{C}$
Reverse voltage per dice.....				5V
Operating and Storage temperature range.....				- 25°C to $+85^{\circ}\text{C}$
Lead soldering time (at 1/16 inch from the bottom of lamp).....				5 seconds @ 230°C

ELECTRO - OPTICAL CHARACTERISTICS ($T_A = 25^{\circ}\text{C}$ unless otherwise specified)


Part number	B. Red	Green	High Eff. Red	Test Condition
	MST	MST	MST	
	5150C	5450C	5950C	
	5160C	5460C	5960C	
Luminous intensity (ucd)				
minimum	320	850	800	$I_f = 20$ mA
typical	800	2200	2200	$I_f = 20$ mA
Forward voltage (V_f)				
typical	2.1	2.1	2.0	$I_f = 20$ mA
maximum	2.6	2.8	2.8	$I_f = 20$ mA
Peak wavelength (nm)	697	570	635	$I_f = 20$ mA
Spectral line half width (nm)	90	30	45	$I_f = 20$ mA
Reverse breakdown voltage (V_R)	5	5	5	$I_R = 100$ μA




0.52 INCH (13.2MM) THREE DIGIT STICK DISPLAY

PINOUT

MST5X50C - Common Anode

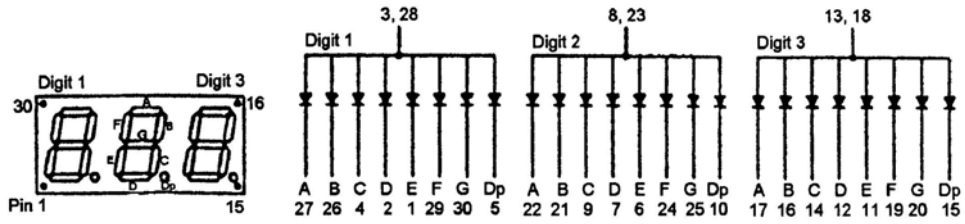

MST5X60C - Common Cathode

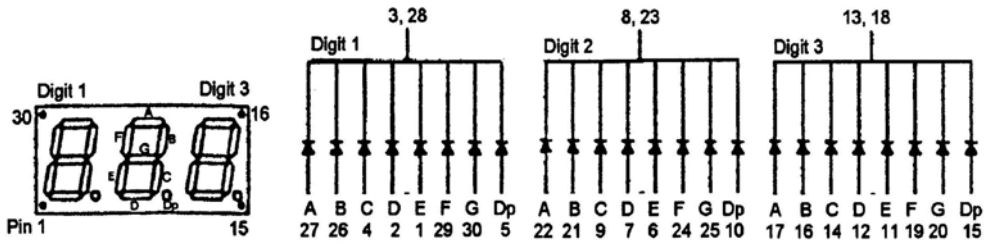



0.52 INCH (13.2MM) THREE DIGIT STICK DISPLAY

GRAPHICAL DETAIL: Bright Red ($T_A = 25^\circ\text{C}$ unless otherwise specified)

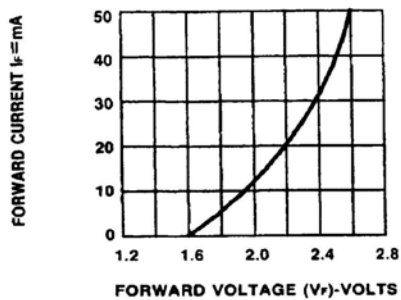


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

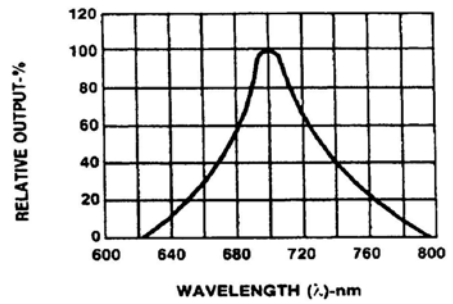


Fig.2 SPECTRAL RESPONSE

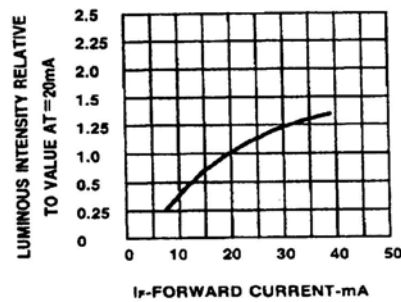


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

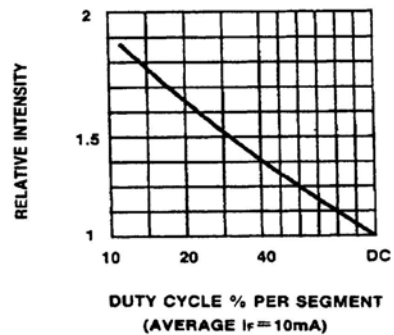


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

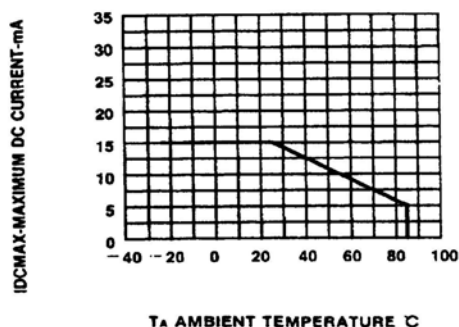


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE.


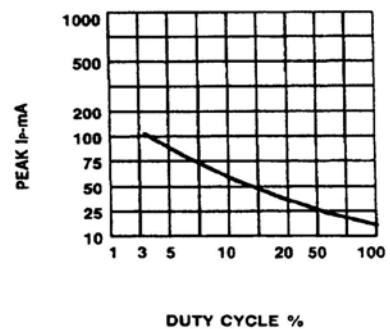


Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE $f = 1 \text{ KHz}$)




0.52 INCH (13.2MM) THREE DIGIT STICK DISPLAY


GRAPHICAL DETAIL: Green ($T_A = 25^\circ\text{C}$ unless otherwise specified)

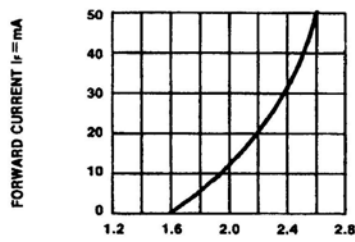


FORWARD VOLTAGE (V_f)-VOLTS
Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

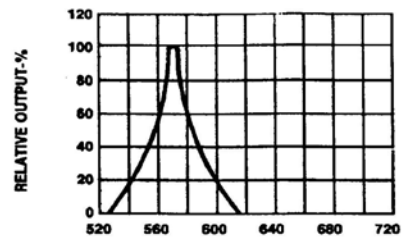


WAVELENGTH (λ)-nm
Fig.2 SPECTRAL RESPONSE

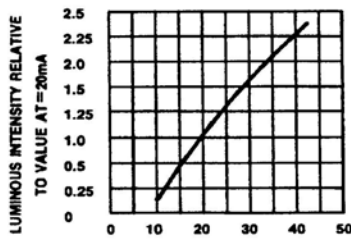


I_f -FORWARD CURRENT-mA
Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

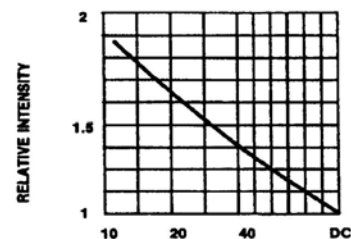

DUTY CYCLE % PER SEGMENT
(AVERAGE $I_f = 10\text{mA}$)
Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

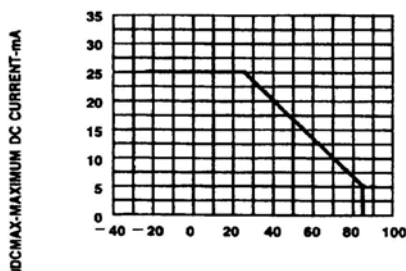

T_A AMBIENT TEMPERATURE $^\circ\text{C}$
Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT CS. A FUNCTION OF AMBIENT TEMPERATURE.

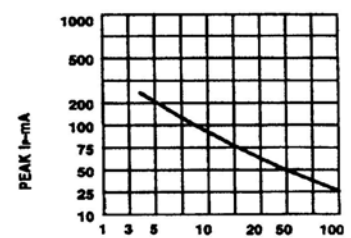

DUTY CYCLE %
Fig. 6 MAX PEAK CURRENT VS. DUTY CYCLE %
(REFRESH RATE $f = 1\text{ KHz}$)



0.52 INCH (13.2MM) THREE DIGIT STICK DISPLAY

GRAPHICAL DETAIL: High Efficiency Red ($T_A = 25^\circ\text{C}$ unless otherwise specified)

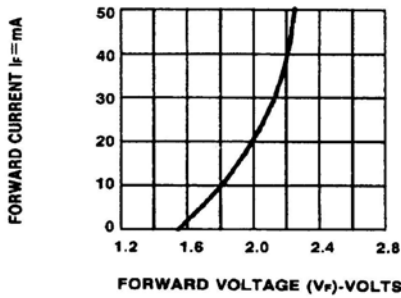


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

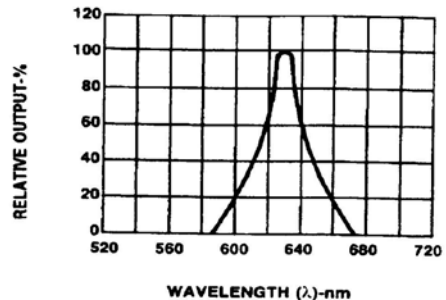


Fig.2 SPECTRAL RESPONSE

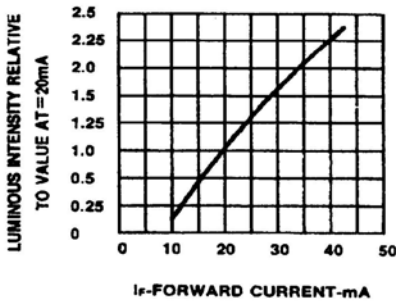


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

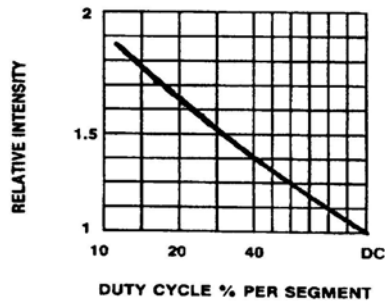


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

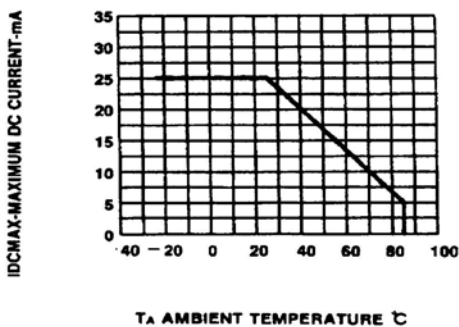


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE.

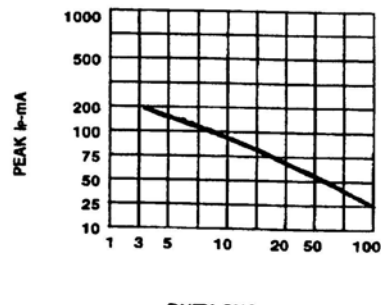


Fig. 6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE $f = 1 \text{ KHz}$)



0.52 INCH (13.2MM) THREE DIGIT STICK DISPLAY

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.