
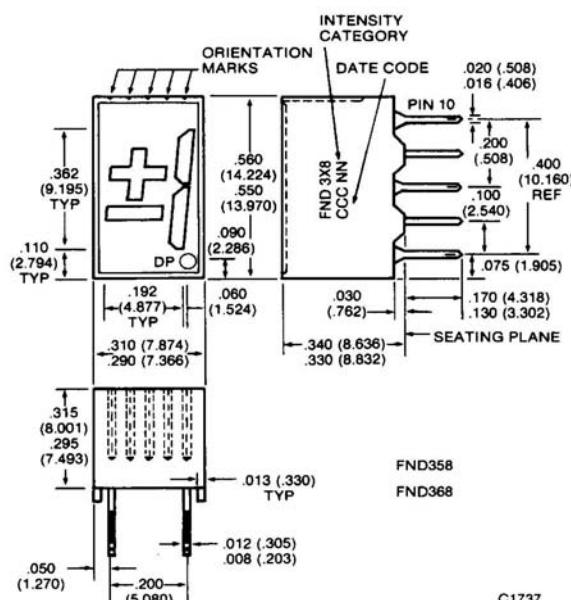


**EVERLIGHT**

**0.362 - INCH  
7 - SEGMENT DISPLAY**

## HIGH EFFICIENCY RED FND310C FND317C FND318C

### PACKAGE DIMENSIONS

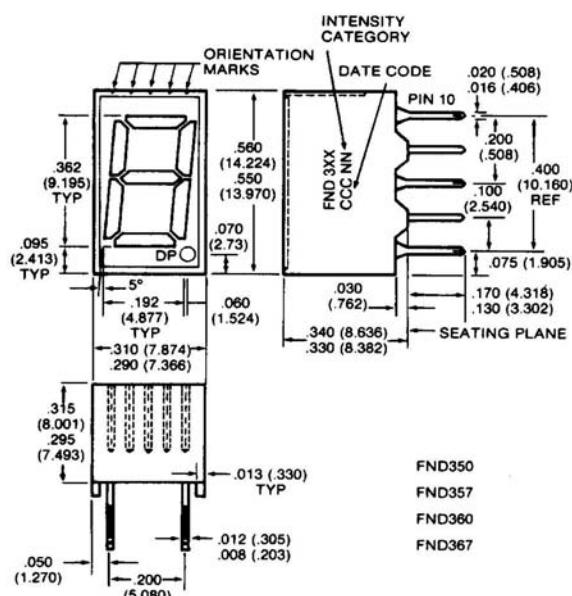

C1737

#### NOTES:

1. ALL DIMENSIONS ARE IN MM (INCH)
2. TOLERANCE ARE  $\pm 0.010$  INCH UNLESS OTHERWISE SPECIFIED

### DESCRIPTION

The FND310C, FND317C and FND318D are high efficiency red GaP 7-segment displays with nominal 0.362" digit height. Reflector cap, PCB and encapsulant are used in the construction of these FND3XXCs.

### FEATURES

- Exactly pin and package compatible with FND3XX
- Compact — 10 digits in 3-inch panel width
- Wide viewing angle
- Right-hand decimal configuration
- Categorized for luminous intensity
- Rugged encapsulated plastic construction

### MODEL NUMBERS

PART NUMBER	COLOR	DESCRIPTION
FND310C	Hi. Eff. Red	Common anode seven segment display
FND317C	Hi. Eff. Red	Common cathode seven segment display
FND318C	Hi. Eff. Red	Common cathode $\pm 1$ overflow display

**EVERLIGHT**

**0.362-INCH  
7-SEGMENT DISPLAY**


**ABSOLUTE MAXIMUM RATINGS**

	<b>FND310C/317C</b>	<b>FND318C</b>
Power dissipation at 25°C ambient .....	500 mW	320 mW
Continuous forward current		
Total .....	200 mA	125 mA
Per segment or decimal point .....	25 mA	25 mA
Reverse voltage		
Per segment or decimal point .....	6 V	6 V
Storage and operating temperature .....	-25°C to +85°C	-25°C to +85°C
Soldering time at 250°C ( $\frac{1}{16}$ inch from the seating plane) ...	3 sec	3 sec

**ELECTRO-OPTICAL CHARACTERISTICS (TA=25°C Unless Otherwise Specified)**


PARAMETER	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Forward voltage - V (per diode)		2.0	2.5	V	I <sub>f</sub> =20 mA
Luminous intensity - I <sub>v</sub>	1800	2700		μcd	I <sub>f</sub> =20 mA
Peak wavelength		655		nm	I <sub>f</sub> =20 mA
Spectrum radiation bandwidth		45		nm	I <sub>f</sub> =20 mA
Reverse voltage-V <sub>r</sub>	5			V	I <sub>r</sub> =100 μA
Capacitance - C		35		pF	V=0, F=1 MHz

**PIN CONNECTIONS**

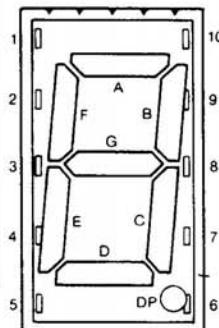


**Pin FND317C**  
1 Common Cathode  
2 Segment F  
3 Segment G  
4 Segment E  
5 Segment D  
6 Common Cathode  
7 Decimal Point DP  
8 Segment C  
9 Segment B  
10 Segment A

**FND310C**  
Common Anode  
Segment F  
Segment G  
Segment E  
Segment D  
Common Cathode  
Decimal Point DP  
Segment C  
Segment B  
Segment A

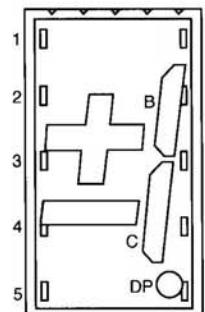


**Pin FND318C**  
1 Common Cathode  
2 Plus Sign  
3 Minus Sign  
4 NC  
5 Omitted  
6 Common Cathode  
7 Decimal Point DP  
8 Segment C  
9 Segment B  
10 NC


**ELECTRICAL SCHEMATIC**

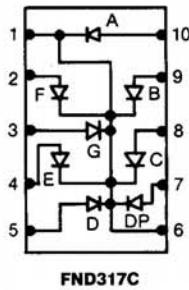

**FND317C**

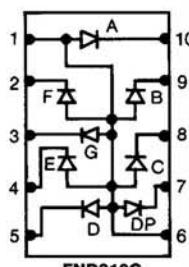

**FND310C**

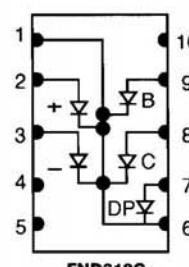

**FND318C**



## 0.362-INCH 7-SEGMENT DISPLAY

---

### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN;NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be or (b) reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.