




# QK08A Series Crossflow Blower

502... 641mm x Ø 92mm

- AC blower with single phase motor. 90° or 180° air flow. Ball bearings and terminals. Max ambient temperature of 40 C.
- Fan propeller of aluminium and air duct housing of sheet steel.
- Wide, even air flow distribution. "V" shaped guide vane suppresses noise.
- Rotational direction CW looking at rotor.
- UL, CSA, VDE approvals on some models. Please contact application engineering

Part Number	CFM @ 0	Curve	Volts	Hertz	Power (W)	dBA	Max Ambient Temp C	Wgt. (lbs)	Type Of Bearing	Features	Capacitor (µF)
QK08A-2/203530	620	6	115	60	290	76	40	10.0	Ball	Leads	22
QK08A-2/207886	445	5	115	60	175	74	40	10.0	Ball	Leads	12
QK08A-4/105638	250	1	230	50/60	68	60	40	13.0	Ball	Leads	2
QK08A-4/208443	340	2	230	60	66	60	40	10.0	Ball	Leads	1.5
QK08A-2/208135	410	4	230	60	210	74	40	10.0	Ball	Leads	4
QK08A-2/205828	620	6	230	60	290	76	40	11.0	Ball	Leads	6
QK08A-2/205737	670	3	230	60	290	76	40	11.0	Ball	Leads	6

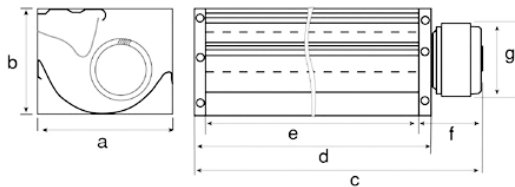

PART NUMBER	a	b	c	d	e	f	g
.../105638	6.30 (160)	5.12 (130)	17.60 (447)	15.35 (390)	13.78 (350)	2.95 (75)	3.62 (92)
.../208443	6.30 (160)	5.12 (130)	23.50 (597)	21.26 (540)	19.69 (500)	2.95 (75)	3.62 (92)
.../208135	6.30 (160)	5.12 (130)	18.39 (467)	15.35 (390)	13.78 (350)	3.94 (100)	3.62 (92)
.../203530	7.87 (200)	6.89 (175)	25.20 (640)	22.44 (570)	19.69 (500)	4.09 (104)	3.62 (92)
.../205828	6.30 (160)	5.12 (130)	25.24 (640)	22.44 (570)	19.69 (500)	4.09 (104)	3.62 (92)
.../207886	6.30 (160)	5.12 (130)	18.39 (467)	15.35 (390)	13.78 (350)	3.94 (100)	3.62 (92)
.../205737	6.30 (160)	5.12 (130)	25.20 (640)	22.44 (570)	19.69 (500)	4.09 (104)	3.62 (92)

