


# QK10A Series Crossflow Blower


467...1100mm x Ø 92mm

- AC blower with single phase motor. 90° or 180° air flow. Ball bearings and terminals. Max ambient temperature of 40 C.
- Fan propeller of aluminium and air duct housing of sheet steel.
- Wide, even air flow distribution. "V" shaped guide vane suppresses noise.
- Rotational direction CW looking at rotor.
- UL, CSA, VDE approvals on some models. Please contact application engineering

Part Number	CFM @ 0	Curve	Volts	Hertz	Power (W)	dBA	Max Ambient Temp C	Wgt. (lbs)	Type Of Bearing	Features	Capacitor (µF)
QK10A-2/111589	940	4	115	50/60	580	86	40	20.0	Ball	Leads	30
QK10A-4/110756	410	1	230	50/60	85	68	40	10.0	Ball	Leads	2
QK10A-2/210955	900	2	230	60	150	66	40	21.0	Ball	Leads	3
QK10A-4/120844	950	3	230	60	670	86	40	22.0	Ball	Leads	8

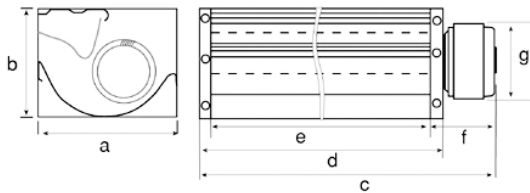

PART NUMBER	a	b	c	d	e	f	g
.../110756	7.87 (200)	6.89 (175)	19.21 (488)	16.51 (420)	14.88 (378)	3.39 (86)	3.62 (92)
.../120844	7.87 (200)	6.89 (175)	43.31 (1100)	40.16 (1020)	38.58 (980)	4.09 (104)	3.62 (92)
.../210955	7.87 (200)	6.89 (175)	25.39 (645)	20.47 (520)	18.89 (480)	5.71 (145)	5.39 (137)
.../111589	7.87 (200)	6.89 (175)	25.39 (645)	20.47 (520)	18.90 (480)	5.71 (145)	5.39 (137)

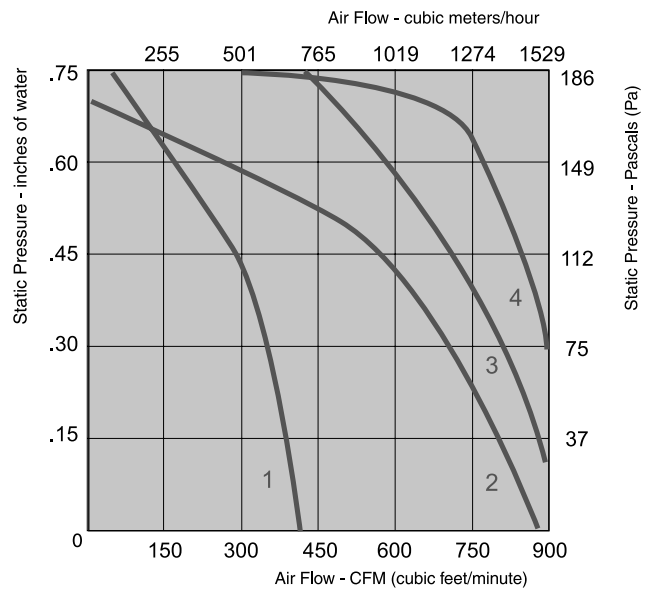

e-mail: [sales@ebm.com](mailto:sales@ebm.com) • TEL: 860-674-1515 • FAX: 860-674-8536  
**ebm Industries, Inc., 100 Hyde Road, Farmington, CT 06034 USA**

ebm Industries, Inc., 2003 © ebm Industries, Inc. reserves the right to change any specifications or data without notice